


CMPT3646

NPN SILICON TRANSISTOR



SOT-23 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPT3646 type is an NPN Silicon Transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for high current, ultra high speed switching applications.

Marking code is C2R.

MAXIMUM RATINGS (T_A=25°C)


	SYMBOL		UNITS
Collector-Base Voltage	V _{CB0}	40	V
Collector-Emitter Voltage	V _{CES}	40	V
Collector-Emitter Voltage	V _{CEO}	15	V
Emitter-Base Voltage	V _{EBO}	5.0	V
Collector Current	I _C	200	mA
Power Dissipation	P _D	350	mW
Operating and Storage			
Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	θ _{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I _{CES}	V _{CE} =20V		0.5	μA
I _{CES}	V _{CE} =20V, T _A =65°C		3.0	μA
BV _{CB0}	I _C =100μA	40		V
BV _{CES}	I _C =10μA	40		V
BV _{CEO}	I _C =10mA	15		V
BV _{EBO}	I _E =100μA	5.0		V
V _{CE(SAT)}	I _C =30mA, I _B =3.0mA		0.20	V
V _{CE(SAT)}	I _C =30mA, I _B =3.0mA, T _A =65°C		0.30	V
V _{CE(SAT)}	I _C =100mA, I _B =10mA		0.28	V
V _{CE(SAT)}	I _C =300mA, I _B =30mA		0.50	V
V _{BE(SAT)}	I _C =30mA, I _B =3.0mA	0.75	0.95	V
V _{BE(SAT)}	I _C =100mA, I _B =10mA		1.20	V
V _{BE(SAT)}	I _C =300mA, I _B =30mA		1.70	V
h _{FE}	V _{CE} =0.4V, I _C =30mA	30	120	
h _{FE}	V _{CE} =0.5V, I _C =100mA	25		

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
h_{FE}	$V_{CE}=1.0V, I_C=300mA$	15		
f_T	$V_{CE}=10V, I_C=30mA, f=100MHz$	350		MHz
C_{ob}	$V_{CB}=5.0V, I_E=0, f=1.0MHz$		5.0	pF
C_{ib}	$V_{BE}=0.5V, I_C=0, f=1.0MHz$		8.0	pF
t_{on}	$V_{CC}=10V, I_C=300mA, I_{B1}=30mA$		18	ns
t_{off}	$V_{CC}=10V, I_C=300mA, I_{B1}=I_{B2}=30mA$		28	ns
t_S	$V_{CC}=10V, I_C=I_{B1}=I_{B2}=10mA$		18	ns

All dimensions in inches (mm).

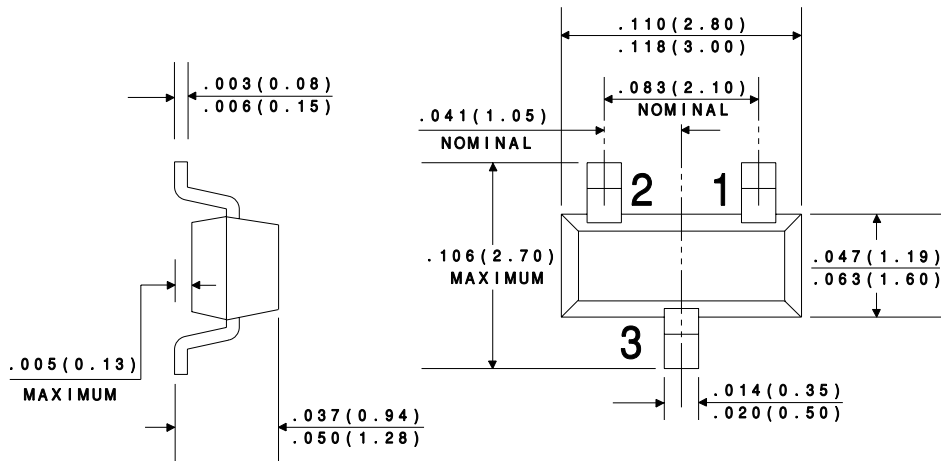

LEAD CODE:

- 1) BASE
- 2) EMITTER
- 3) COLLECTOR



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.