




**General Description**

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"™ process features gold metal for greatly extended lifetime. Low output capacitance and high  $F_t$  enhance broadband performance

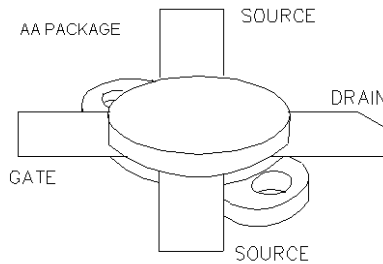

**PATENTED GOLD METALIZED SILICON GATE ENHANCEMENT MODE RF POWER VDMOS TRANSISTOR**

**10Watts Single Ended**

**Package Style AA**

**HIGH EFFICIENCY, LINEAR, HIGH GAIN, LOW NOISE**

**ABSOLUTE MAXIMUM RATINGS (TC = 25 °C)**

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
60 Watts	3.12 °C/W	200 °C	-65 °C to 150 °C	2 A	50 V	50V	30V

**RF CHARACTERISTICS ( 10WATTS OUTPUT )**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	10			dB	$I_{dq} = 0.4 A, V_{ds} = 12.5V, F = 175 MHz$
$\eta$	Drain Efficiency		60		%	$I_{dq} = 0.4 A, V_{ds} = 12.5V, F = 175 MHz$
VSWR	Load Mismatch Tolerance			20:1	Relative	$I_{dq} = 0.4 A, V_{ds} = 12.5V, F = 175 MHz$

**ELECTRICAL CHARACTERISTICS (EACH SIDE)**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	40			V	$I_{ds} = 0.05 A, V_{gs} = 0V$
Idss	Zero Bias Drain Current			1	mA	$V_{ds} = 12.5 V, V_{gs} = 0V$
Igss	Gate Leakage Current			1	uA	$V_{ds} = 0 V, V_{gs} = 30V$
Vgs	Gate Bias for Drain Current	1		7	V	$I_{ds} = 0.1 A, V_{gs} = V_{ds}$
gM	Forward Transconductance		0.8		Mho	$V_{ds} = 10V, V_{gs} = 5V$
Rdson	Saturation Resistance		0.7		Ohm	$V_{gs} = 20V, I_{ds} = 8A$
Idsat	Saturation Current		7.5		Amp	$V_{gs} = 20V, V_{ds} = 10V$
Ciss	Common Source Input Capacitance		40		pF	$V_{ds} = 12.5 V, V_{gs} = 0V, F = 1 MHz$
Crss	Common Source Feedback Capacitance		6		pF	$V_{ds} = 12.5 V, V_{gs} = 0V, F = 1 MHz$
Coss	Common Source Output Capacitance		30		pF	$V_{ds} = 12.5 V, V_{gs} = 0V, F = 1 MHz$

# F1210


POUT VS PIN GRAPH

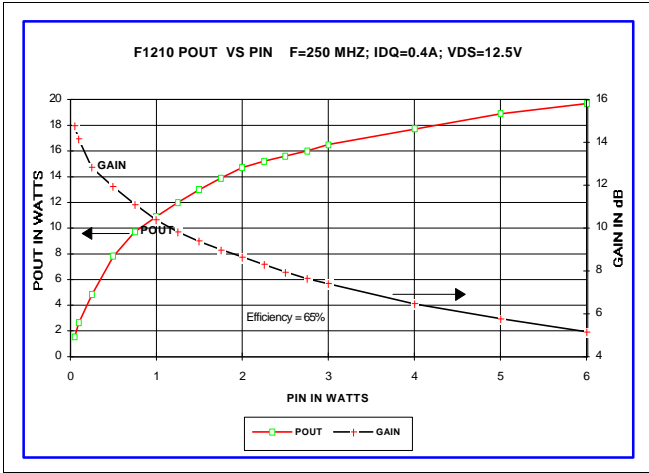


IV CURVE

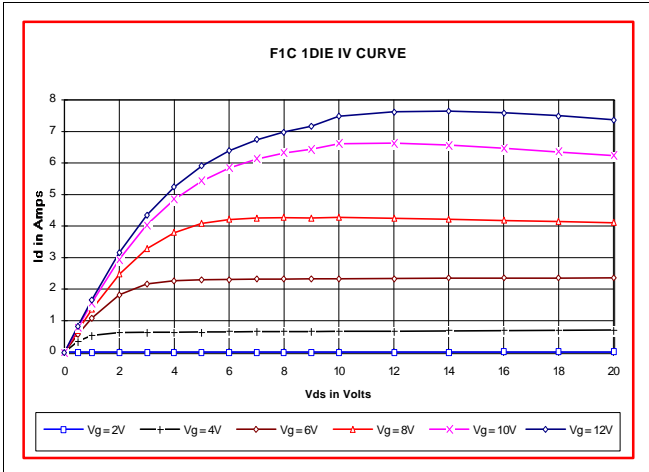


S11 AND S22 SMITH CHART

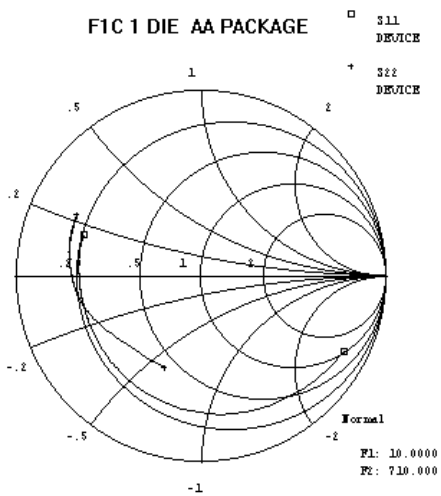


CAPACITANCE VS VOLTAGE

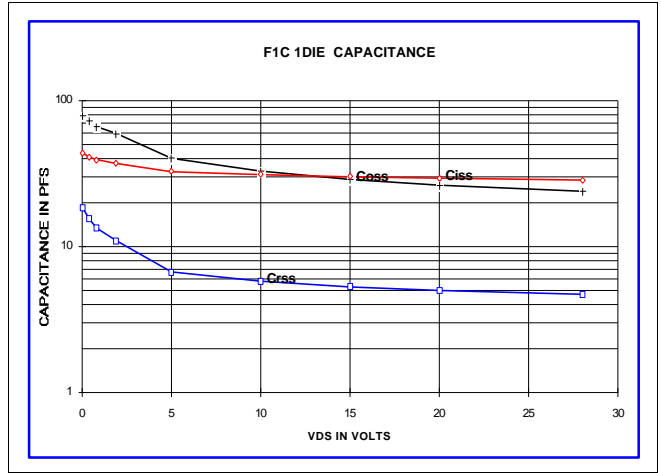

ID AND GM VS VGS

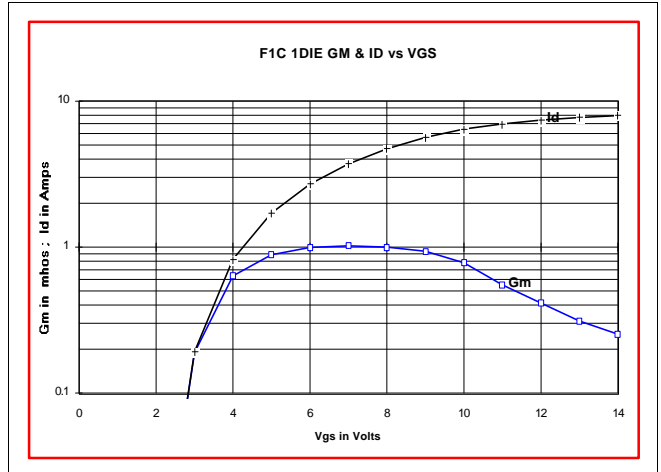

PACKAGE DIMENSIONS IN INCHES

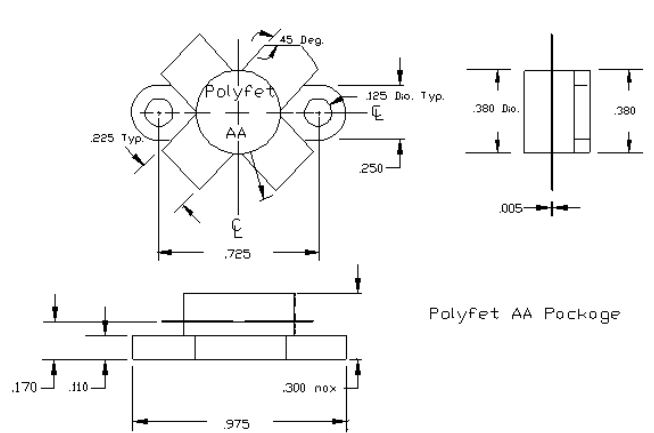



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.