

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CEN-U45

NPN SILICON
DARLINGTON TRANSISTOR

JEDEC TO-202 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CEN-U45 type is a NPN Silicon Monolithic Darlington Transistor designed for applications requiring high gain and high power dissipation.

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)


	<u>SYMBOL</u>		<u>UNITS</u>
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CES}	40	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	12	V
Collector Current	I_C	2.0	A
Power Dissipation	P_D	2.0	W
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	10	W
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	θ_{JA}	62.5	$^\circ\text{C/W}$
Thermal Resistance	θ_{JC}	12.5	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
I_{CBO}	$V_{CB}=30\text{V}$		100	nA
I_{EBO}	$V_{EB}=10\text{V}$		100	nA
BV_{CBO}	$I_C=100\mu\text{A}$	50		V
BV_{CES}	$I_C=100\mu\text{A}$	40		V
BV_{EBO}	$I_E=10\mu\text{A}$	12		V
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=200\text{mA}$		1.0	V
$V_{BE(SAT)}$	$I_C=1.0\text{A}, I_B=200\text{mA}$		2.0	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{A}$		2.0	V
h_{FE}	$V_{CE}=5.0\text{V}, I_C=200\text{mA}$	25K	150K	
h_{FE}	$V_{CE}=5.0\text{V}, I_C=500\text{mA}$	15K		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=1.0\text{A}$	4.0K		
f_T	$V_{CE}=5.0\text{V}, I_C=200\text{mA}, f=100\text{MHz}$	100		MHz
C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$		8.0	pF

(SEE REVERSE SIDE)

JEDEC TO-202 CASE - MECHANICAL OUTLINE

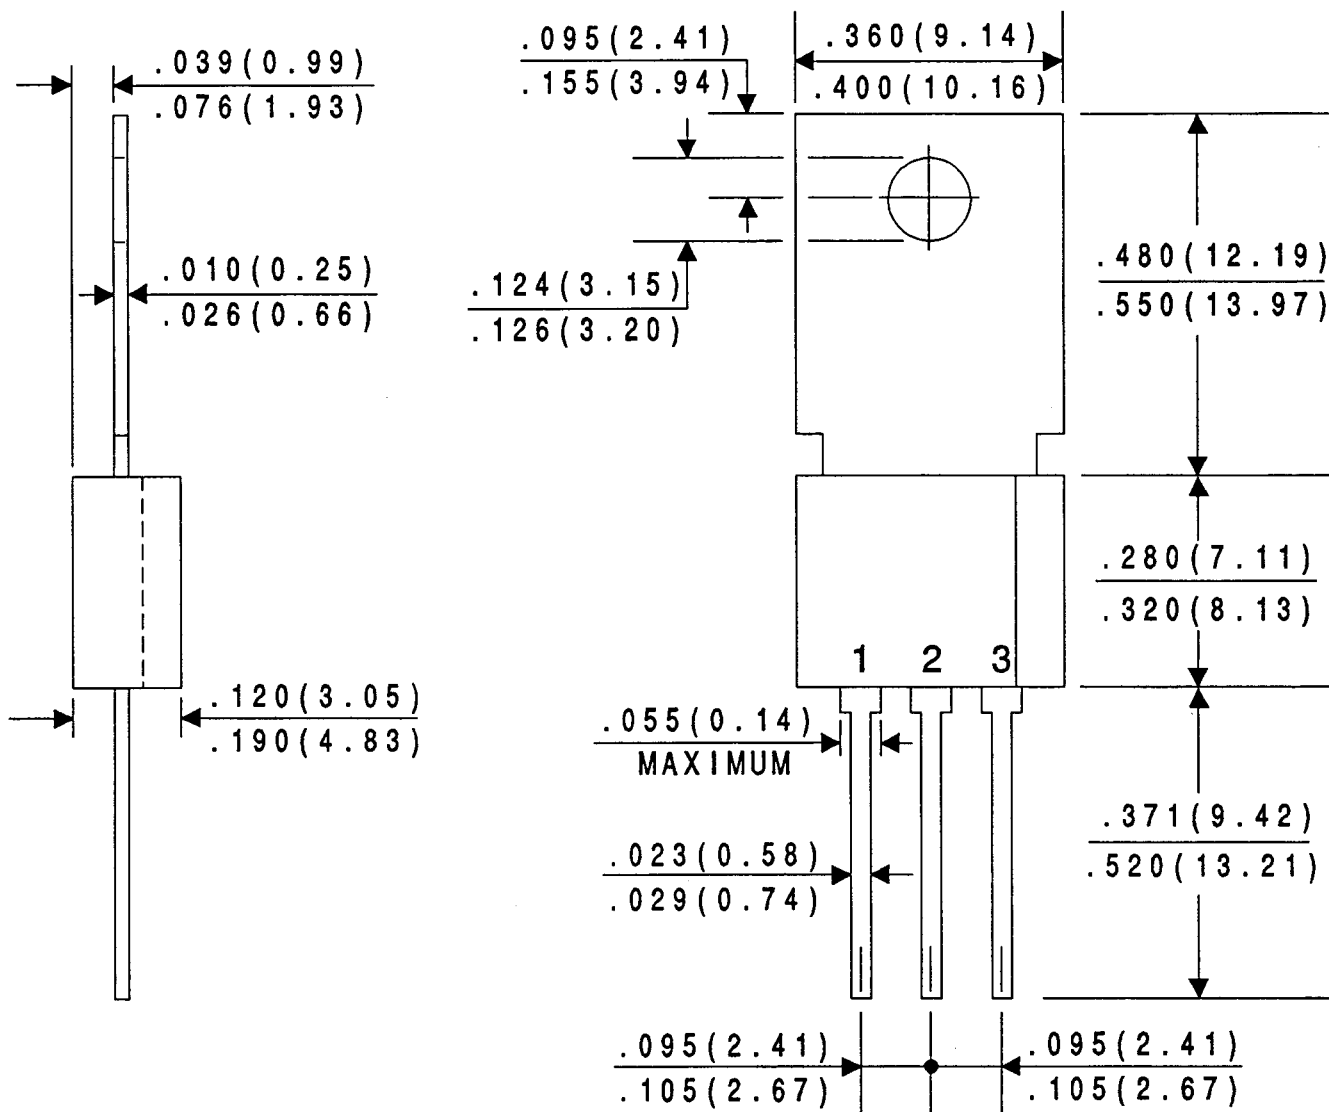

All Dimensions in Inches (mm).

LEAD CODE:

- 1) EMITTER
- 2) BASE
- 3) COLLECTOR



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.