

March 1997

6A, 400V and 500V N-Channel IGBTs

Features

- 6A, 400V and 500V
- $V_{CE(ON)}$: 2.5V Max.
- T_{FALL} : 1.0 μ s
- Low On-State Voltage
- Fast Switching Speeds
- High Input Impedance

Applications

- Power Supplies
- Motor Drives
- Protective Circuits

Description

The HGTD6N40E1, HGTD6N40E1S, HGTD6N50E1, and HGTD6N50E1S are n-channel enhancement-mode insulated gate bipolar transistors (IGBTs) designed for high voltage, low on-dissipation applications such as switching regulators and motor drivers. These types can be operated directly from low power integrated circuits.


PACKAGING AVAILABILITY

PART NUMBER	PACKAGE	BRAND
HGTD6N40E1	TO-251AA	G6N40E
HGTD6N50E1	TO-251AA	G6N50E
HGTD6N40E1S	TO-252AA	G6N40E
HGTD6N50E1S	TO-252AA	G6N50E


NOTE: When ordering, use the entire part number.

Packages

HGTD6N40E1, HGTD6N50E1
JEDEC TO-251AA

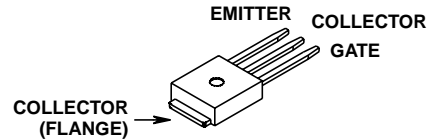


HGTD6N40E1S, HGTD6N50E1S
JEDEC TO-252AA



Terminal Diagram

N-CHANNEL ENHANCEMENT MODE



Absolute Maximum Ratings $T_C = +25^\circ\text{C}$, Unless Otherwise Specified

	HGTD6N40E1 HGTD6N40E1S	HGTD6N50E1 HGTD6N50E1S	UNITS
Collector-Emitter Voltage	400	500	V
Collector-Gate Voltage $R_{GE} = 1M\Omega$	400	500	V
Gate-Emitter Voltage	± 20	± 20	V
Collector Current Continuous at $T_C = +25^\circ\text{C}$	7.5	7.5	A
at $T_C = +90^\circ\text{C}$	6.0	6.0	A
Power Dissipation Total at $T_C = +25^\circ\text{C}$	60	60	W
Power Dissipation Derating $T_C > +25^\circ\text{C}$	0.48	0.48	W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	-55 to +150	-55 to +150	$^\circ\text{C}$

INTERSIL CORPORATION'S PRODUCT IS COVERED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS:

4,364,073	4,417,385	4,430,792	4,443,931	4,466,176	4,516,143	4,532,534	4,567,641
4,587,713	4,598,461	4,605,948	4,618,872	4,620,211	4,631,564	4,639,754	4,639,762
4,641,162	4,644,637	4,682,195	4,684,413	4,694,313	4,717,679	4,743,952	4,783,690
4,794,432	4,801,986	4,803,533	4,809,045	4,809,047	4,810,665	4,823,176	4,837,606
4,860,080	4,883,767	4,888,627	4,890,143	4,901,127	4,904,609	4,933,740	4,963,951
4,969,027							

Specifications HGTD6N40E1, HGTD6N40E1S, HGTD6N50E1, HGTD6N50E1S

Electrical Specifications $T_C = +25^\circ\text{C}$, Unless Otherwise Specified

PARAMETERS	SYMBOL	TEST CONDITIONS	LIMITS				UNITS	
			HGTD6N40E1 HGTD6N40E1S		HGTD6N50E1 HGTD6N50E1S			
			MIN	MAX	MIN	MAX		
Collector-Emitter Breakdown Voltage	BV_{CES}	$I_C = 250\mu\text{A}$, $V_{GE} = 0\text{V}$	400	-	500	-	V	
Gate Threshold Voltage	$V_{GE(TH)}$	$V_{GE} = V_{CE}$, $I_C = 1\text{mA}$	2.0	4.5	2.0	4.5	V	
Zero Gate Voltage Collector Current	I_{CES}	$T_J = +150^\circ\text{C}$, $V_{CE} = 400\text{V}$	-	250	-	-	μA	
		$T_J = +150^\circ\text{C}$, $V_{CE} = 500\text{V}$	-	-	-	250	μA	
Gate-Emitter Leakage Current	I_{GES}	$V_{GE} = \pm 20\text{V}$, $V_{CE} = 0\text{V}$	-	100	-	100	nA	
Collector-Emitter On-Voltage	$V_{CE(ON)}$	$T_J = +150^\circ\text{C}$, $I_C = 3\text{A}$, $V_{GE} = 10\text{V}$	-	2.9	-	2.9	V	
		$T_J = +150^\circ\text{C}$, $I_C = 3\text{A}$, $V_{GE} = 15\text{V}$	-	2.5	-	2.5	V	
		$T_J = +25^\circ\text{C}$, $I_C = 3\text{A}$, $V_{GE} = 10\text{V}$	-	2.5	-	2.5	V	
		$T_J = +25^\circ\text{C}$, $I_C = 3\text{A}$, $V_{GE} = 15\text{V}$	-	2.4	-	2.4	V	
Gate-Emitter Plateau Voltage	V_{GEP}	$I_C = 3\text{A}$, $V_{CE} = 10\text{V}$	6.5 (Typ)				V	
On-State Gate Charge	$Q_{G(ON)}$	$I_C = 3\text{A}$, $V_{CE} = 10\text{V}$	6.9 (Typ)				nC	
Turn-On Delay Time	$t_{D(ON)}$	Resistive Load, $I_C = 3\text{A}$, $V_{CE} = 400\text{V}$, $R_L = 133\Omega$, $T_J = +150^\circ\text{C}$, $V_{GE} = 10\text{V}$, $R_G = 25\Omega$	90 (Typ)				ns	
Rise Time	t_R		32 (Typ)				ns	
Turn-Off Delay Time	$t_{D(OFF)}$		24 (Typ)				ns	
Fall Time	t_F		1100 (Typ)				ns	
Turn-Off Energy Loss Per Cycle (Off Switching Dissipation = $W_{OFF} \times \text{Frequency}$)	W_{OFF}		0.29 (Typ)				mJ	
Turn-Off Delay Time	$t_{D(OFF)I}$		Inductive Load (See Figure 11), $I_C = 3\text{A}$, $V_{CE(CL P)} = 400\text{V}$, $R_L = 133\Omega$, $L = 50\mu\text{H}$, $T_J = +150^\circ\text{C}$, $V_{GE} = 10\text{V}$, $R_G = 25\Omega$	-	190	-	190	ns
Fall Time	t_{FI}			-	1	-	1	μs
Turn-Off Energy Loss Per Cycle (Off Switching Dissipation = $W_{OFF} \times \text{Frequency}$)	W_{OFF}	-		0.43	-	0.43	mJ	
Thermal Resistance Junction-to-Case (IGBT)	$R_{\theta JC}$		-	2.08	-	2.08	$^\circ\text{C/W}$	

Typical Performance Curves

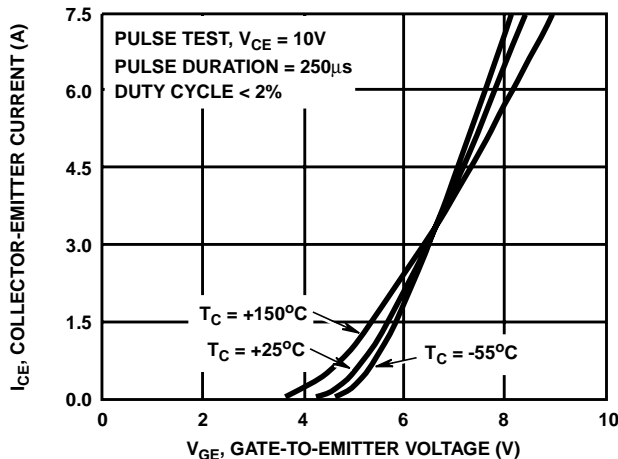


FIGURE 1. TYPICAL TRANSFER CHARACTERISTICS

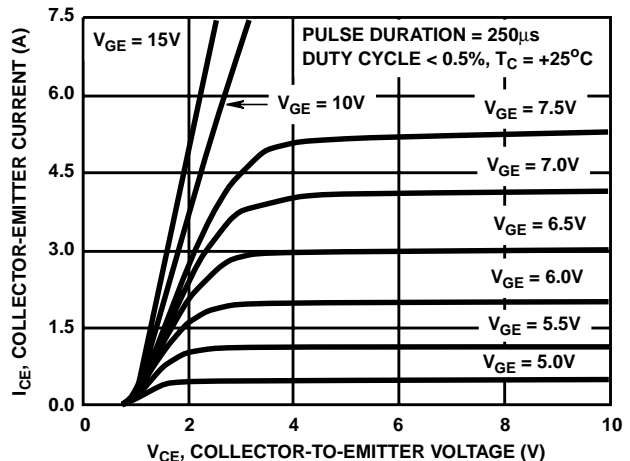


FIGURE 2. TYPICAL SATURATION CHARACTERISTICS

Typical Performance Curves (Continued)

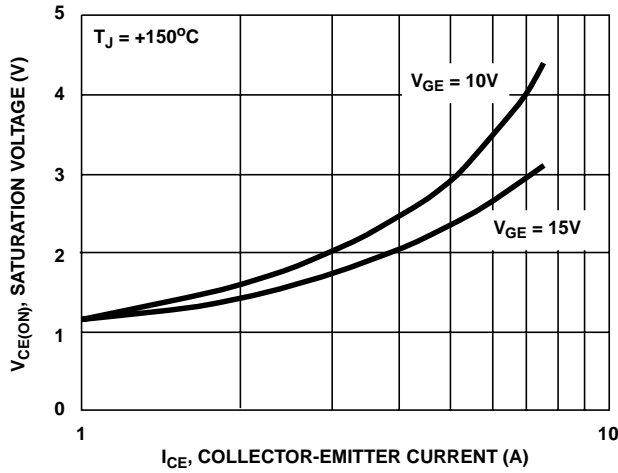


FIGURE 3. SATURATION VOLTAGE vs COLLECTOR-EMITTER CURRENT (TYPICAL)

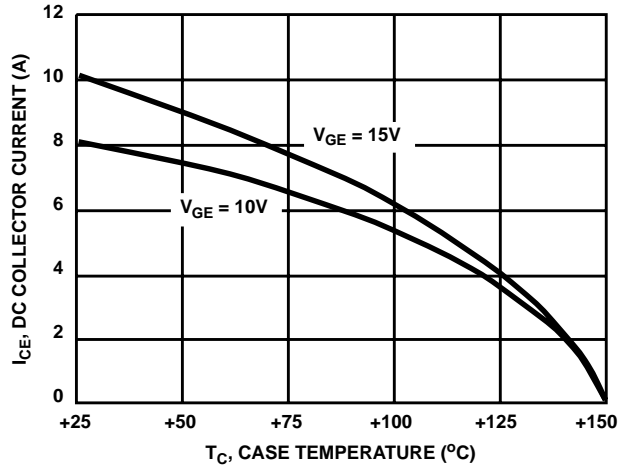


FIGURE 4. DC COLLECTOR CURRENT vs CASE TEMPERATURE

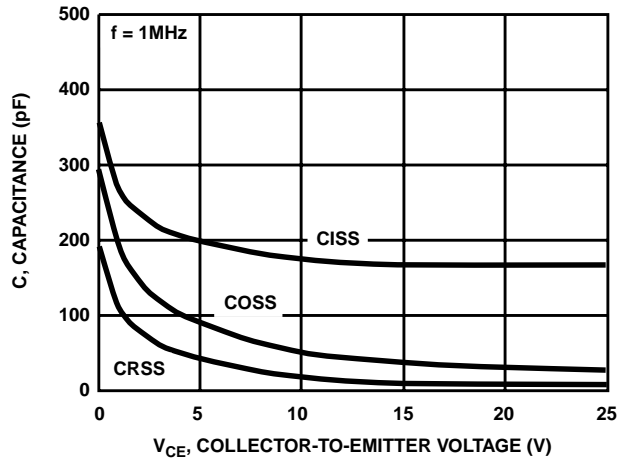


FIGURE 5. CAPACITANCE vs COLLECTOR-TO-EMITTER VOLTAGE (TYPICAL)

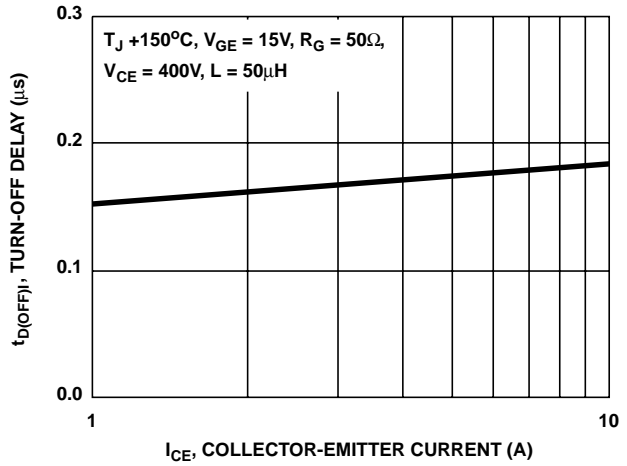


FIGURE 6. TURN-OFF DELAY vs COLLECTOR-TO-EMITTER CURRENT (TYPICAL)

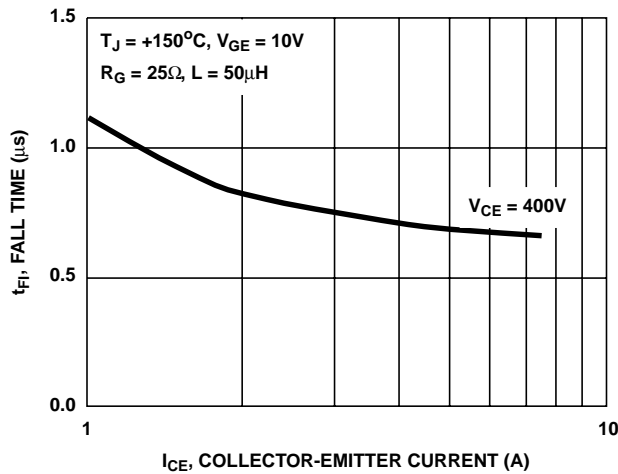


FIGURE 7. FALL TIME vs COLLECTOR-TO-EMITTER CURRENT (TYPICAL)

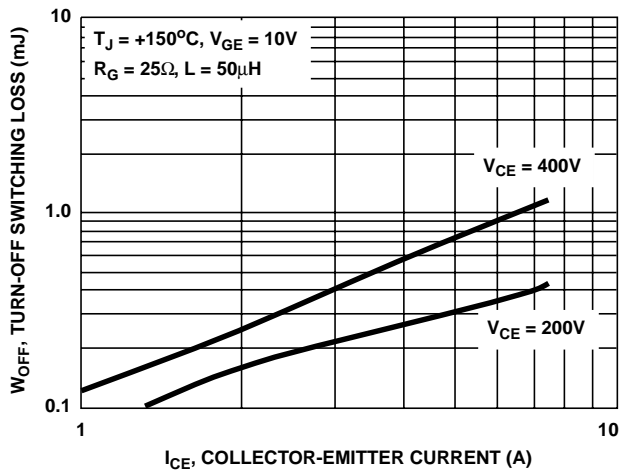


FIGURE 8. TURN-OFF SWITCHING LOSS vs COLLECTOR-EMITTER CURRENT (TYPICAL)

Typical Performance Curves (Continued)

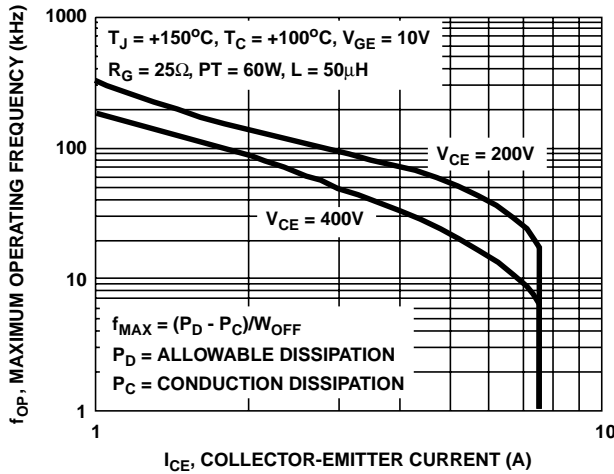


FIGURE 9. MAXIMUM OPERATING FREQUENCY vs COLLECTOR CURRENT AND VOLTAGE (TYPICAL)

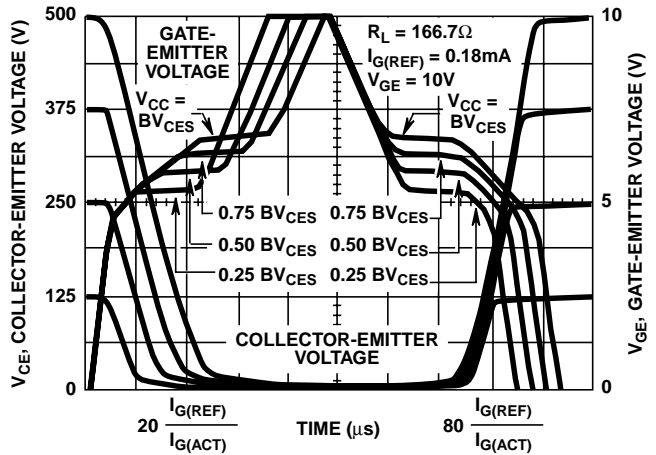


FIGURE 10. NORMALIZED SWITCHING WAVEFORMS AT CONSTANT GATE CURRENT

Test Circuit

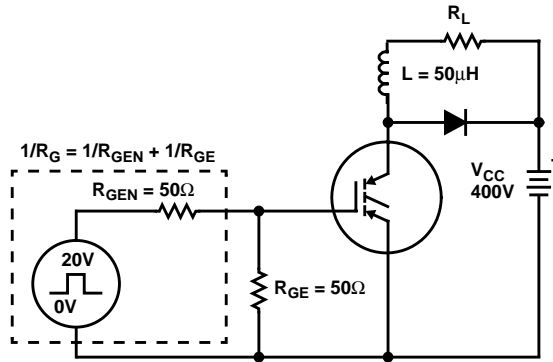


FIGURE 11. INDUCTIVE SWITCHING TEST CIRCUIT

All Intersil semiconductor products are manufactured, assembled and tested under ISO9000 quality systems certification.

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see web site <http://www.intersil.com>

Sales Office Headquarters

NORTH AMERICA
Intersil Corporation
P. O. Box 883, Mail Stop 53-204
Melbourne, FL 32902
TEL: (407) 724-7000
FAX: (407) 724-7240

EUROPE
Intersil SA
Mercure Center
100, Rue de la Fusee
1130 Brussels, Belgium
TEL: (32) 2.724.2111
FAX: (32) 2.724.22.05

ASIA
Intersil (Taiwan) Ltd.
Taiwan Limited
7F-6, No. 101 Fu Hsing North Road
Taipei, Taiwan
Republic of China
TEL: (886) 2 2716 9310
FAX: (886) 2 2715 3029

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.