


**2SD780, 2SD780A**

**AUDIO FREQUENCY POWER AMPLIFIER  
NPN SILICON EPITAXIAL TRANSISTOR  
MINI MOLD**

**PACKAGE DIMENSIONS**

in millimeters

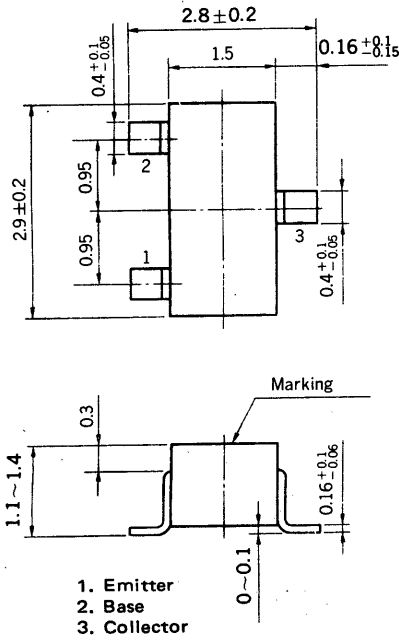

**DESCRIPTION**

The 2SD780, 2SD780A are designed for use in small type equipments especially recommended for hybrid integrated circuit and other applications.

**FEATURES**

- Micro package.
- High DC current gain.  $h_{FE} : 200$  TYP. ( $V_{CE} = 1.0$  V,  $I_C = 50$  mA)
- Complimentary to NEC 2SB736, 2SB736A PNP Transistor.

**ABSOLUTE MAXIMUM RATINGS**

Maximum Voltages and Current ( $T_a = 25^\circ\text{C}$ )	2SD780	2SD780A	
Collector to Base Voltage	$V_{CBO}$ 60	80	V
Collector to Emitter Voltage	$V_{CEO}$ 60	80	V
Emitter to Base Voltage	$V_{EBO}$	5.0	V
Collector Current (DC)	$I_C$	300	mA
Maximum Power Dissipation			
Total Power Dissipation			
at $25^\circ\text{C}$ Ambient Temperature	$P_T$	200	mW
Maximum Temperatures			
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$
Operating Junction Temperature	$T_j$	150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )**






CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	$I_{CBO}$			100	nA	$V_{CB} = 50$ V, $I_E = 0$
Emitter Cutoff Current	$I_{EBO}$			100	nA	$V_{EB} = 5.0$ V, $I_C = 0$
DC Current Gain	$h_{FE1}$	110	200	400		$V_{CE} = 1.0$ V, $I_C = 50$ mA *
DC Current Gain	$h_{FE2}$	30				$V_{CE} = 2.0$ V, $I_C = 300$ mA *
Base to Emitter Voltage	$V_{BE}$	600	645	700	mV	$V_{CE} = 6.0$ V, $I_C = 10$ mA *
Collector Saturation Voltage	$V_{CE(sat)}$		0.15	0.6	V	$I_C = 300$ mA, $I_B = 30$ mA *
Output Capacitance	$C_{ob}$		7.0		pF	$V_{CB} = 6.0$ V, $I_E = 0$ , $f = 1.0$ MHz
Gain Bandwidth Product	$f_T$		140		MHz	$V_{CE} = 6.0$ V, $I_E = -10$ mA


\* Pulsed PW  $\leq 350$   $\mu\text{s}$ , Duty Cycle  $\leq 2\%$

**$h_{FE1}$  Classification**

Marking.	2SD780	DW1	DW2	DW3	DW4	DW5
	2SD780A	D51	D52	D53	D54	D55
$h_{FE}$	110 to 180	135 to 220	170 to 270	200 to 320	250 to 400	

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

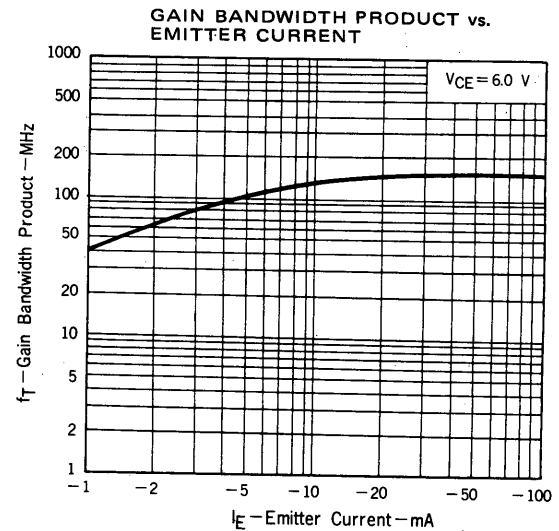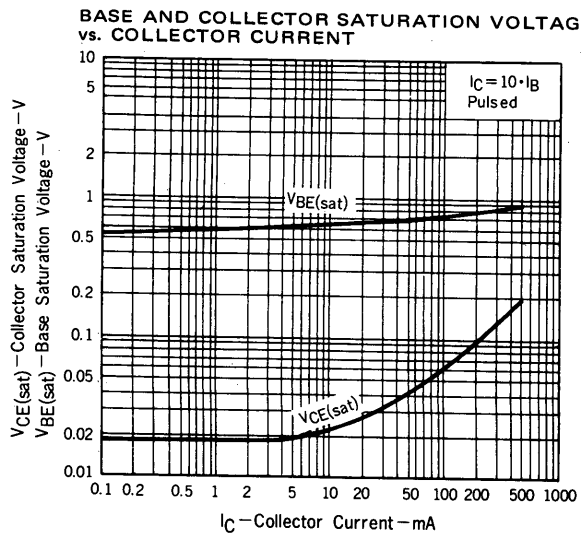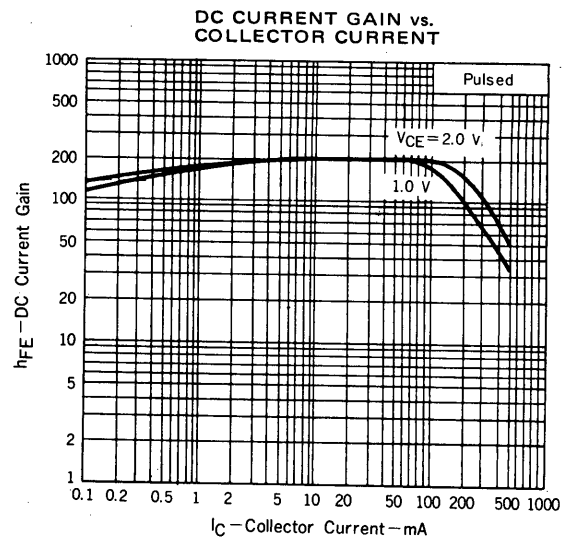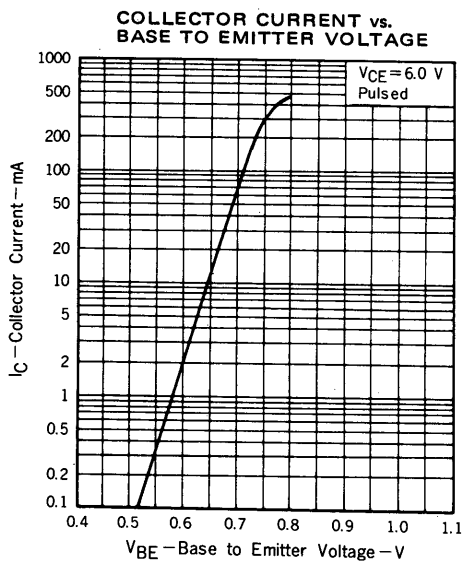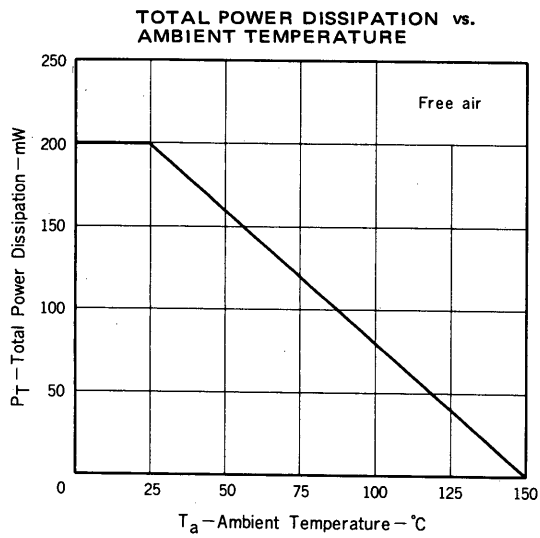

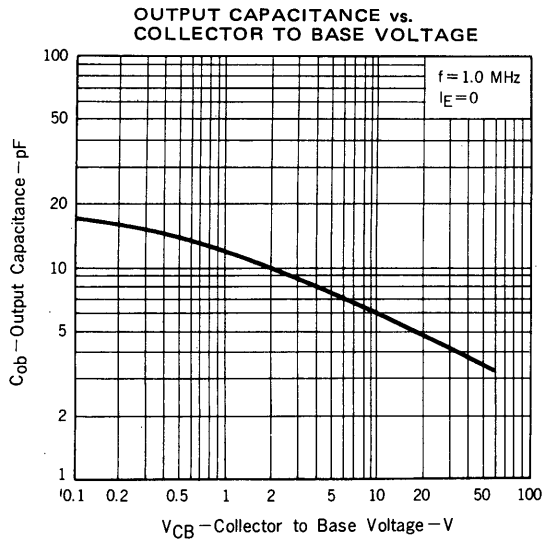

---

**NEC Corporation**

INTERNATIONAL ELECTRON DEVICES DIV.  
SUMITOMO MITA Building, 37-8,  
Shiba Gochome, Minato-ku, Tokyo 108, Japan  
Tel: Tokyo 456-3111  
Telex Address: NECTOK J22686  
Cable Address: NEC TOKYO

TC-1264B  
SEPT.-5-84M  
Printed in Japan



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.