

GaAs N-channel Dual-Gate MES FET

Description:

The 3SK148 is a GaAs N-channel Dual-Gate MES FET for low noise UHF amplifiers and mixers. Low noise and high gain characteristics are accomplished by optimum mask pattern designing. Easier high frequency circuits adjustments are made possible by the miniaturized plastic molded package which contributes to reduce parasitic elements of the device.

Features:



Low NF: NF = 1.2 dB (typ.) at 800MHz
 High PG: PG = 20 dB (typ.) at 800MHz
 High Stability

Applications:

- UHF Amplifier, mixer, oscillator

Absolute Maximum Ratings: (Ta = 25°C)

- Drain to Source Voltage: Vdsx 8 V
- Gate 1 to Source Voltage: Vg1s -6 V
- Gate 2 to Source Voltage: Vg2s -6 V
- Drain Current: Id 80 mA
- Power Dissipation: Pch 150 mW
- Channel Temperature: Tch +150 °C
- Storage Temperature: Tstg -55 ~ +150 °C

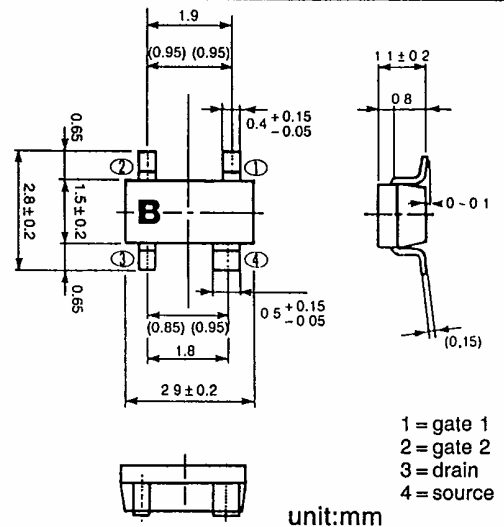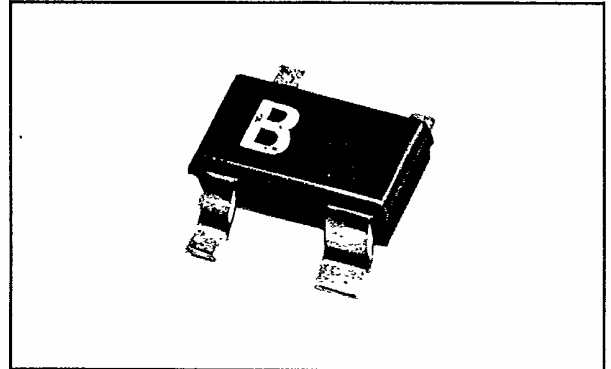


Electrical Characteristics: (Ta = 25°C)


| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------|--------|--|------|------|------|------|
| Drain to Source Voltage | Vdsx | Id = 100µA Vg1s = 8 Vg2s = -5V | 8 | | | V |
| Gate 1 Cutoff Current | Ig1ss | Vg1s = -4V Vg2s = 0V Vds = 0V | -10 | | | µA |
| Gate 2 Cutoff Current | Ig2ss | Vg2s = -4V Vg1s = 0V Vds = 0V | -10 | | | µA |
| Drain Saturation Current | Idss | Vds = 5V Vg1s = 0V Vg2s = 0V | 30 | | 80 | mA |
| Gate 1 Pinchoff Voltage | Vp1 | Vds = 5V Id = 100µA Vg2s = 0V | -4 | | -1 | V |
| Gate 2 Pinchoff Voltage | Vp2 | Vds = 5V Id = 100µA Vg1s = 0V | -4 | | -1 | V |
| Transconductance | gm | Vds = 5V Id = 10mA Vg2s = 1.5V f = 1KHz | 15 | 22 | | mS |
| Input Capacitance | Ciss | Vds = 5V Id = 10mA Vg2s = 1.5V f = 1MHz | | 0.5 | 1.0 | PF |
| Feedback Capacitance | Crss | | | 7.5 | 25 | fF |
| Power Gain | PG | Vds = 5V Id = 10mA Vg2s = 1.5V f = 800MHz | 16 | 20 | | dB |
| Noise Figure | NF | | | 1.2 | 2.0 | dB |

The specifications are subject to change without notice.


Output Characteristics: ($T_a = 25^\circ\text{C}$, $V_{g2s} = 1.5\text{V}$, $V_{g1s} = -0.5\text{V}/\text{step}$)

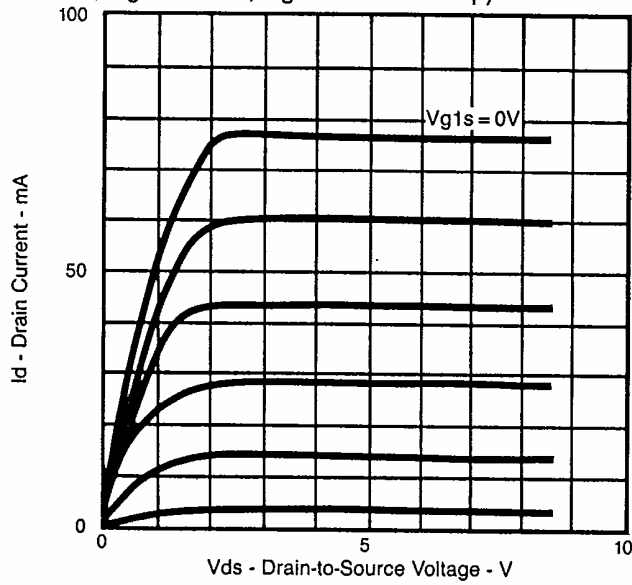



NF, Ga Frequency Dependence: ($V_{ds} = 5.0\text{V}$, $V_{g2s} = 1.5\text{V}$, $I_{ds} = 10\text{mA}$)

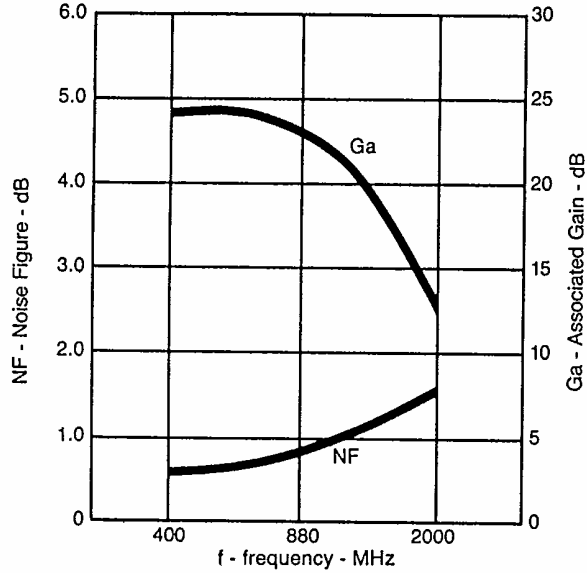

NF- I_d Characteristics: ($V_{ds} = 5.0\text{V}$, $V_{g2s} = 1.5\text{V}$, Frequency at 450MHz)

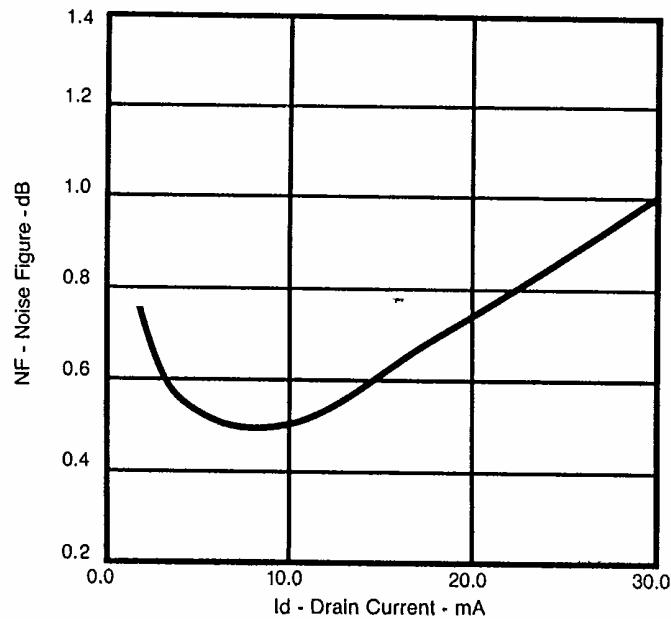


S-Parameters vs. Frequency Characteristics: ($V_{ds} = 5.0V$, $V_{g2s} = 1.5V$, $I_{ds} = 10mA$)

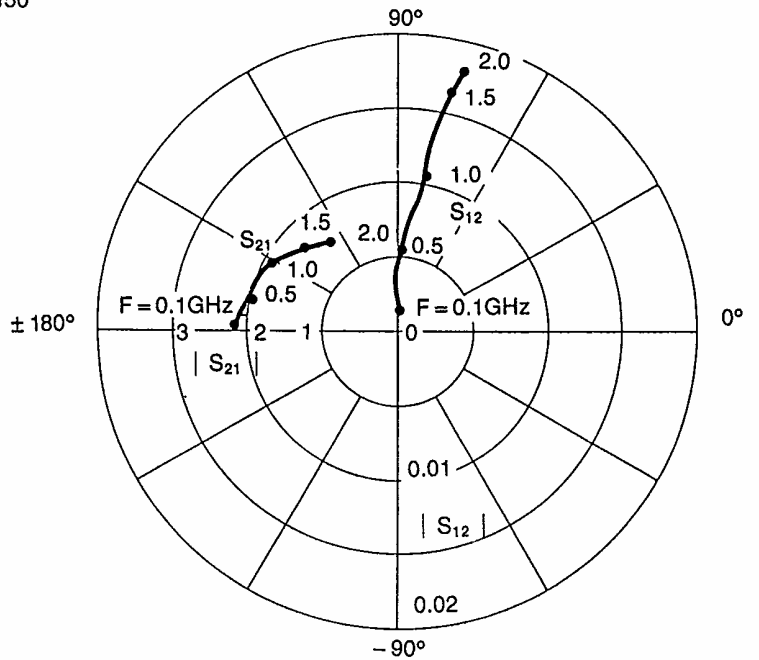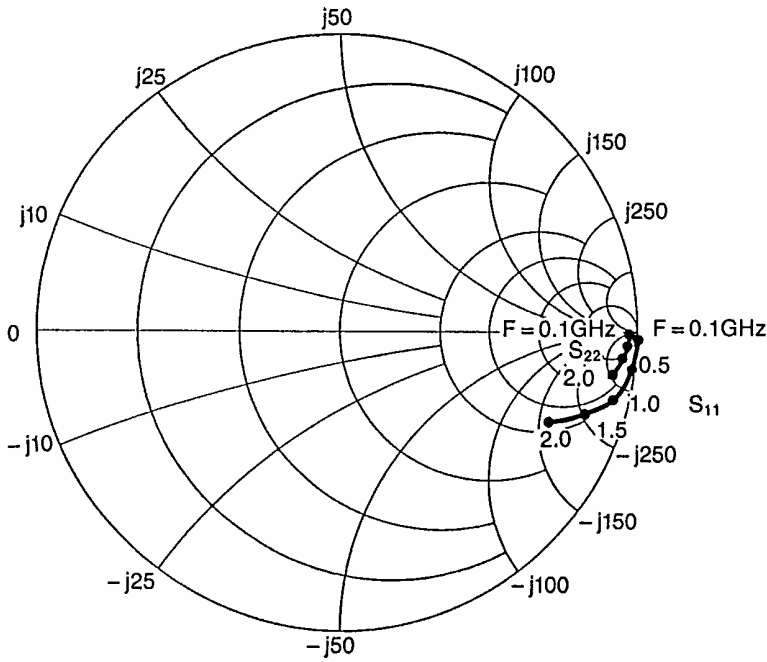


S-Parameter Data of FET 3SK148 (50.0 Ohm reference)

| Frequency MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|------|--------|-------|--------|--------|--------|------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100 | .999 | -1.60 | 2.065 | 177.40 | 0.0011 | 88.48 | .961 | -.77 |
| 200 | .998 | -2.97 | 2.044 | 172.69 | 0.0021 | 93.67 | .961 | -1.85 |
| 300 | .999 | -4.28 | 2.180 | 169.86 | 0.0023 | 105.04 | .971 | -2.98 |
| 400 | .993 | -5.70 | 2.077 | 170.12 | 0.0049 | 89.67 | .958 | -3.51 |
| 500 | .989 | -6.98 | 1.981 | 167.14 | 0.0054 | 83.41 | .958 | -4.17 |
| 600 | .979 | -8.16 | 1.999 | 161.04 | 0.0068 | 83.94 | .960 | -5.09 |
| 700 | .969 | -9.57 | 2.004 | 160.63 | 0.0082 | 83.47 | .955 | -5.68 |
| 800 | .958 | -10.84 | 1.957 | 159.23 | 0.0084 | 82.97 | .955 | -6.83 |
| 900 | .948 | -12.16 | 1.856 | 153.88 | 0.0091 | 79.56 | .948 | -7.22 |
| 1000 | .938 | -13.23 | 1.938 | 150.58 | 0.0106 | 78.17 | .949 | -8.58 |
| 1200 | .912 | -15.27 | 1.789 | 147.43 | 0.0131 | 79.92 | .941 | -10.37 |
| 1400 | .877 | -17.11 | 1.823 | 139.04 | 0.0151 | 74.26 | .936 | -12.06 |
| 1600 | .841 | -19.12 | 1.700 | 137.04 | 0.0156 | 78.12 | .935 | -13.26 |
| 1800 | .805 | -21.04 | 1.704 | 132.09 | 0.0171 | 77.47 | .928 | -13.91 |
| 2000 | .756 | -22.32 | 1.448 | 126.14 | 0.0176 | 76.07 | .922 | -14.46 |

Noise Figure Characteristics: (Vds = 5.0V, Vg2s = 1.5V, Ids = 10mA)
 at 450MHz at 880MHz

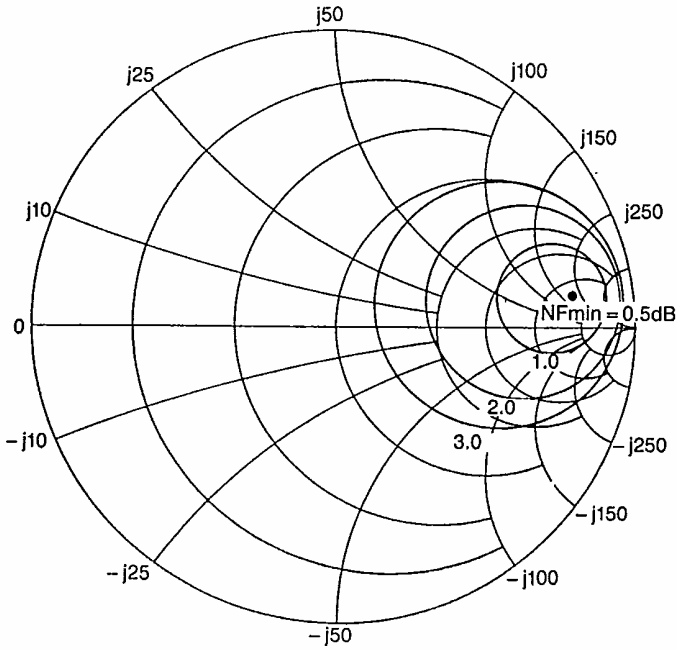


Vds = 5.0V
 Vg2s = 1.5V
 Ids = 10mA
 Frequency 450 MHz
 NF min 0.50 dB
 Ga 23.83 dB
 Gamma (S); Mag 0.799 Ang 7.78°
 Gamma (L); Mag 0.887 Ang 7.31°

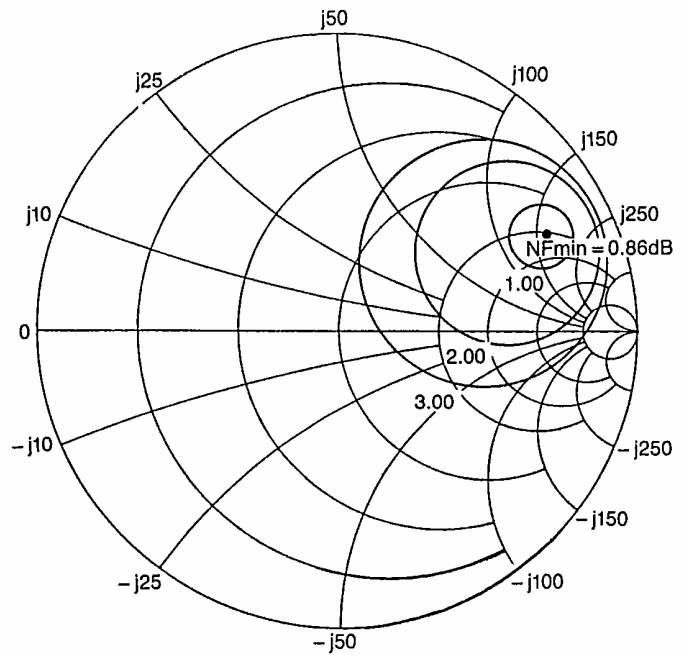

Vds = 5.0V
 Vg2s = 1.5V
 Ids = 10mA
 Frequency 880 MHz
 NF min 0.86 dB
 Ga 23.70 dB
 Gamma (S); Mag 0.771, Ang 25.07°
 Gamma (L); Mag 0.830, Ang 21.84°

at 2000MHz

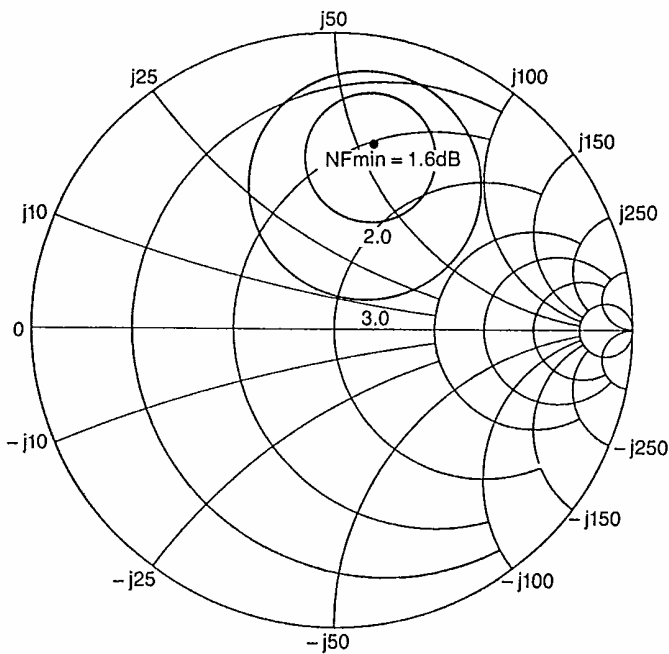

| Frequency (MHz) | Ga (dB) | NF (dB) | Gamma- S | | Gamma- L | |
|-----------------|---------|---------|----------|--------|----------|--------|
| | | | (Mag.) | (Ang.) | (Mag.) | (Ang.) |
| 400 | 23.54 | 0.59 | 0.824 | 3.16° | 0.910 | 8.75° |
| 450 | 23.83 | 0.50 | 0.799 | 7.78° | 0.887 | 7.31° |
| 500 | 22.79 | 0.47 | 0.792 | 12.03° | 0.848 | 14.56° |
| 880 | 23.70 | 0.86 | 0.771 | 25.07° | 0.830 | 21.84° |
| 2000 | 12.92 | 1.60 | 0.643 | 78.48° | 0.559 | 46.00° |

Vds = 5.0V
 Vg2s = 1.5V
 Ids = 10mA
 Frequency 2000 MHz
 NF min 1.60 dB
 Ga 12.91 dB
 Gamma (S); Mag 0.643, Ang 78.48°
 Gamma (L); Mag 0.559, Ang 46.00°



Sony Component Products Division
 West Coast Main Office: 23430 Hawthorne Blvd., Suite No. 330, Torrance, California 90505 213-373-9425
 Northwest Office: 1359 Old Oakland Road, San Jose, California 95112 408-280-0111
 East Coast Office: 15 Essex Road, Paramus, New Jersey 07653 201-368-5020

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.