


## Features

- Integrates the IEEE 802.11b Physical Layer (Baseband) and the Media Access Controller (MAC) for Supporting Standard Rates up to 11 Mbps
- Supports Antenna Diversity Algorithm, Automatic Receive Gain Control, Transmit Gain Control, Transmit Filter for Japanese Regulatory and Differential or Single-Ended I- and Q-Baseband Signals
- Integrates 160 KBytes of SRAM Organized in Five Banks of 32 KBytes Each, Offering the Flexibility for individually Configuring Each of Them as Program or Data Memory
- Zero Wait States for Program Execution
- Fast Data Transfers through DMA Channels
- Low Power ARM7TDMI® RISC Processor
- Integrates a Bootstrap ROM Supporting Device Firmware Upgrade (DFU) Protocol and USB Chapter 9 Compatibility
- The Bootstrap Code Supports External SPI EEPROM for the Custom Configuration Parameters Used during the Device Enumeration Phase as well as Default Parameters for First Time EEPROM Programming
- Glueless Parallel Flash Memory Interface, Supporting up to 128 KBytes of Nonvolatile Memory
- Glueless External SRAM Interface for All MAC Operations, Supporting up to 128 KBytes of External Memory
- Wired Equivalency Privacy (WEP) in Hardware Supporting 64-bit and 128-bit Keys
- Hardware Implementation of TKIP
- Hardware Implementation of AES Encryption Supporting Various Modes (CCM/CTR/CBC)
- The WLAN Functions Can Be Easily Changed or Updated to New Requirements Since They are Implemented in Microcode
- Supports 11 Mbps Rates With Automatic Fallback to 5.5, 2 and 1 Mbps
- SPI Interface and 9 GPIO Pins
- 144-ball LFBGA Package
- Low-voltage 1.8V Core Operation

## Block Diagram

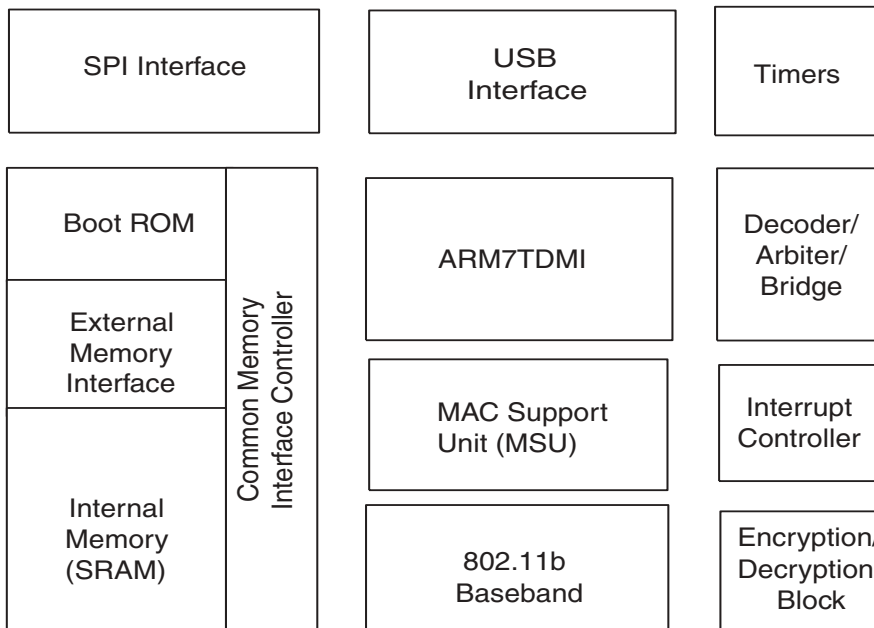

# 802.11b Media Access Controller (MAC) and Baseband with USB Interface

## AT76C505A Summary

Rev. 2389BS-WLAN-07/03



Note: This is a summary document. A complete document is available under NDA. For more information, please contact your local Atmel sales office.

## Description

The AT76C505A is a single-chip baseband controller that can handle IEEE 802.11b standard compliant data rates of up to 11 Mbps and provides all processing and functionality needed for the MAC protocol of IEEE 802.11b. The AT76C505A is a full speed USB 2.0 compliant device that can support up to four configurable Endpoints (EP) plus one Control EP. The AT76C505A USB interface can support Suspend and Resume bus condition for saving power during host idle periods.

Besides the USB interface, the AT76C505A contains a WEP/TKIP engine block, an AES engine block, a MAC Support Unit (MSU), a 802.11b baseband controller, two memory controllers and the ARM<sup>®</sup> subsystem consisting of an Interrupt Controller, two 32-bit timers, and an address decoder unit.

The ARM7TDMI core supports two alternative instruction sets. Powerful 32-bit code can be executed by the processor in ARM operating mode. However, a 16-bit instruction subset is also available in Thumb<sup>®</sup> mode. Thumb mode can be selected to exploit full processor power with limited external memory resources. Note that ARM7TDMI operating mode can be changed at run time with negligible overhead.



## Atmel Corporation

2325 Orchard Parkway  
San Jose, CA 95131  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## Regional Headquarters

### Europe

Atmel Sarl  
Route des Arsenalux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### Asia

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### Japan

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Atmel Operations

### Memory

2325 Orchard Parkway  
San Jose, CA 95131  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### Microcontrollers

2325 Orchard Parkway  
San Jose, CA 95131  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ASIC/ASSP/Smart Cards

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### RF/Automotive

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

### e-mail

[literature@atmel.com](mailto:literature@atmel.com)

### Web Site

<http://www.atmel.com>

**Disclaimer:** Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2003. All rights reserved. Atmel® and combinations thereof, and DataFlash® are the registered trademarks of Atmel Corporation or its subsidiaries. ARM7TDMI®, ARM®, and Thumb® are the registered trademarks of ARM, Ltd. Other terms and product names may be the trademarks of others.



Printed on recycled paper.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.