



### THREE PHASE BRIDGE

### Power Modules

#### Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V<sub>RMS</sub> isolating voltage
- UL E78996 approved 



#### Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

#### Major Ratings and Characteristics

Parameters	60MT.KB	70MT.KB	Units
$I_o$	60 (75)	70 (90)	A
@ $T_c$	85 (61)	85 (57)	°C
$I_{FSM}$			
@ 50Hz	420	480	A
@ 60Hz	440	500	A
$I^2t$			
@ 50Hz	870	1150	A <sup>2</sup> s
@ 60Hz	790	1050	A <sup>2</sup> s
$I^2\sqrt{t}$	8700	11500	A <sup>2</sup> √s
$V_{RRM}$ range	800 to 1600		V
$T_{STG}$ range	- 40 to 150		°C
$T_J$ range	- 40 to 150		°C

## 60-70MT..KB Series

Bulletin I27500 rev. A 05/03

International  
IRF Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J$ max. mA
60-70MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

#### Forward Conduction

Parameter	60MT.KB	70MT.KB	Units	Conditions
$I_O$ Maximum DC output current @ Case temperature	60 (75)	70 (90)	A	120° Rect conduction angle
	85 (61)	85 (57)	°C	
$I_{FSM}$ Maximum peak, one-cycle forward, non-repetitive surge current	420	480	A	t = 10ms No voltage
	440	500		t = 8.3ms reapplied
	350	400		t = 10ms 100% $V_{RRM}$
	370	420		t = 8.3ms reapplied
$I^2t$ Maximum $I^2t$ for fusing	870	1150	A <sup>2</sup> s	t = 10ms No voltage
	790	1050		t = 8.3ms reapplied
	610	800		t = 10ms 100% $V_{RRM}$
	560	730		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	8700	11300	A <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.85	0.86	V	(16.7% x $\pi$ x $I_{F(AV)} < I < \pi$ x $I_{F(AV)}$ ), @ $T_J$ max.
$V_{F(TO)2}$ High level value of threshold voltage	1.07	1.08	V	( $I > \pi$ x $I_{F(AV)}$ ), @ $T_J$ max.
$r_{f1}$ Low level value of forward slope resistance	8.04	7.35	mΩ	(16.7% x $\pi$ x $I_{F(AV)} < I < \pi$ x $I_{F(AV)}$ ), @ $T_J$ max.
$r_{f2}$ High level value of forward slope resistance	7.08	6.53	mΩ	( $I > \pi$ x $I_{F(AV)}$ ), @ $T_J$ max.
$V_{FM}$ Maximum forward voltage drop	1.75	1.55	V	$I_{pk} = 100A$ , $T_J = 25^\circ C$ , $t_p = 400\mu s$ single junction
$V_{INS}$ RMS isolation voltage	4000	4000	V	$T_J = 25^\circ C$ , all terminal shorted f = 50Hz, t = 1s

#### Thermal and Mechanical Specifications

Parameter	60MT.KC	70MT.KC	Units	Conditions
$T_J$ Max. junction operating temperature range	-40 to 150		°C	
$T_{stg}$ Max. storage temperature range	-40 to 150		°C	
$R_{thJC}$ Max. thermal resistance, junction to case	0.37	0.29	K/W	DC operation per module
	2.22	1.75		DC operation per junction
	0.40	0.34		120° Rect conduction angle per module
	2.42	2.01		120° Rect conduction angle per junction
$R_{thCS}$ Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque ± 10% to heatsink to terminal	4 to 6		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
	3 to 4			
wt Approximate weight	176		g	

Ordering Information Table

<b>Device Code</b>				
<b>7</b>	<b>0</b>	<b>MT</b>	<b>160</b>	<b>K B</b>
①	②	③	④	⑤

**1** - Current rating code: 6 = 60 A Avg.  
7 = 70 A Avg.

**2** - Three phase diodes bridge

**3** - Essential part number

**4** - Voltage code: Code x 10 =  $V_{RRM}$  (See Voltage Ratings Table)

**5** - Generation II

Outline Table (without optional barriers)

Screws M5 x 0.8 Length 10

All dimensions in millimeters (inches)

**NOTE: To order the Optional Hardware see Bulletin I27900**

# 60-70MT..KB Series

Bulletin I27500 rev. A 05/03

## Outline Table (with optional barriers)

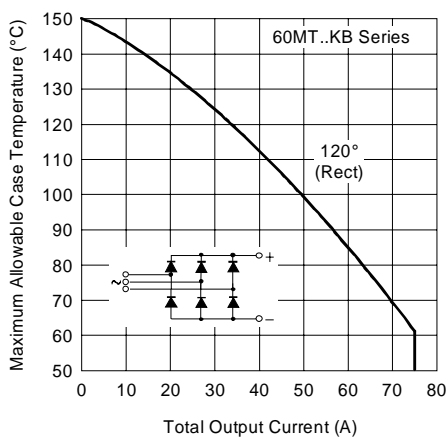
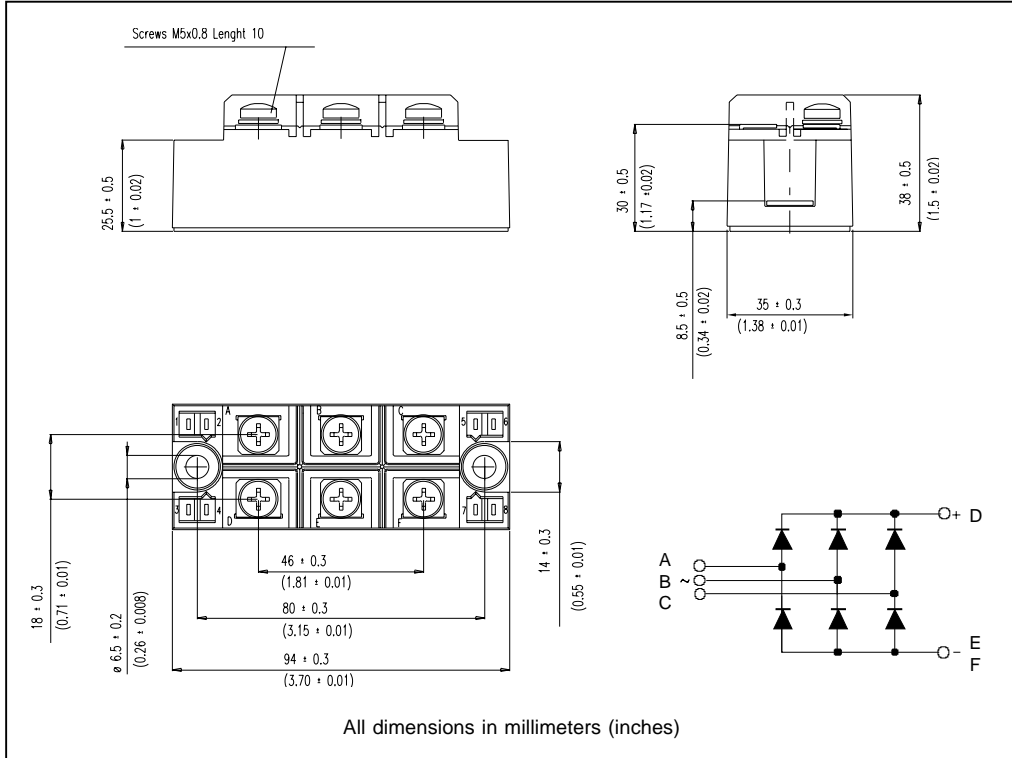


Fig. 1 - Current Ratings Characteristics

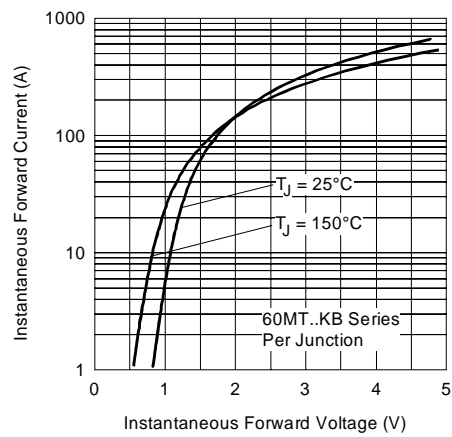


Fig. 2 - Forward Voltage Drop Characteristics

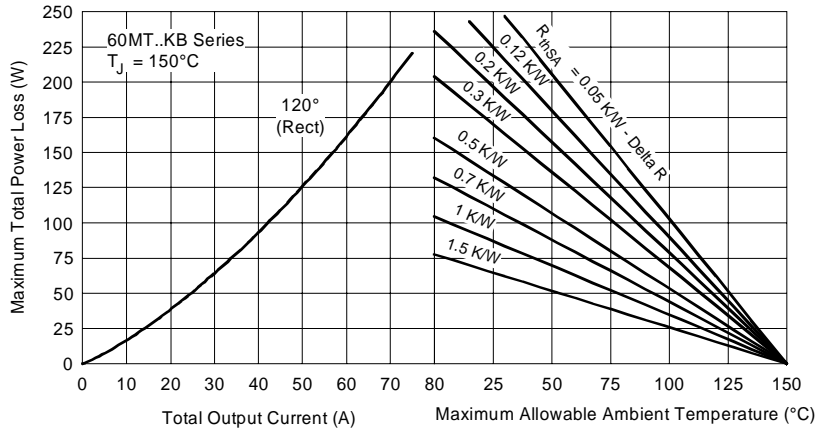


Fig. 3 - Total Power Loss Characteristics

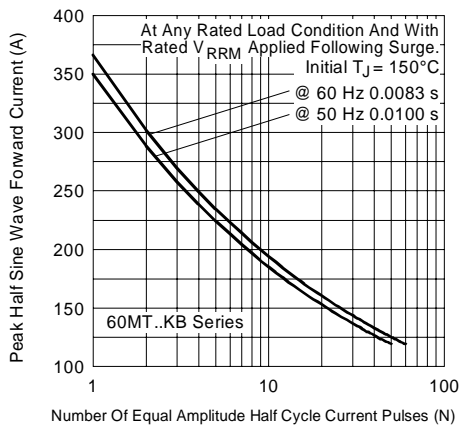


Fig. 4 - Maximum Non-Repetitive Surge Current

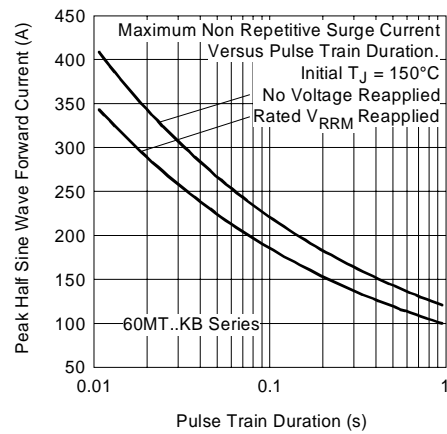


Fig. 5 - Maximum Non-Repetitive Surge Current

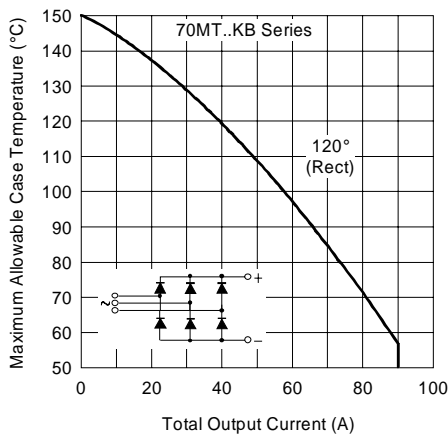


Fig. 6 - Current Ratings Characteristics

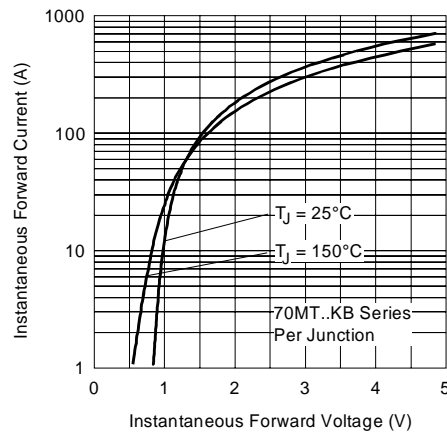


Fig. 7 - Forward Voltage Drop Characteristics

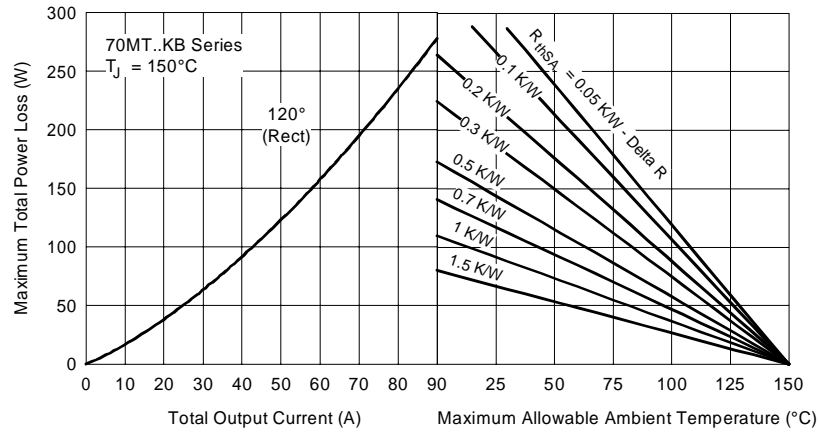


Fig. 8 - Total Power Loss Characteristics

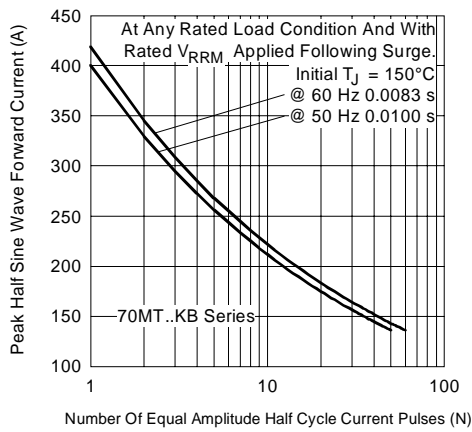


Fig. 9 - Maximum Non-Repetitive Surge Current

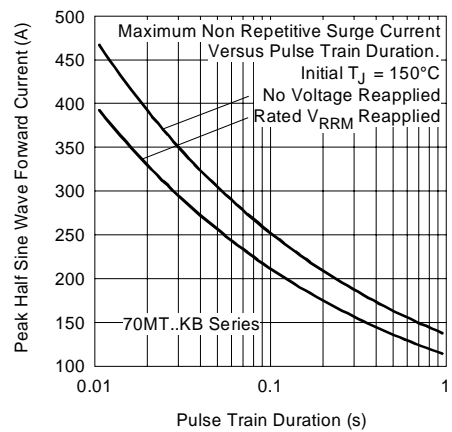


Fig. 10 - Maximum Non-Repetitive Surge Current

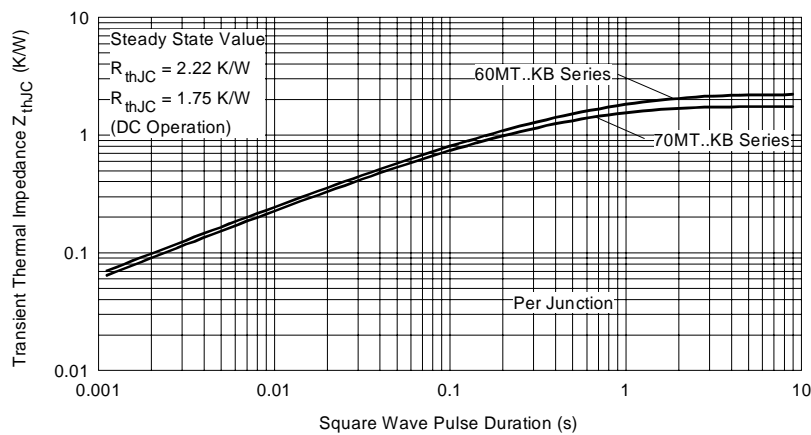


Fig. 11 - Thermal Impedance  $Z_{thJC}$  Characteristic

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 05/03



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.