


Outline Drawing (Conforms to TO-202)

Dimensions	Inches	Millimeters
A	0.93 ± 0.02	23.7 ± 0.5
B	0.47 Min.	12.0 Min.
C	0.39 Max.	10.0 Max.
D	0.31 Max.	8.0 Max.
E	0.18	4.5
F	0.16 Max.	4.0 Max.
G	0.126 ± 0.008	3.2 ± 0.2

Dimensions	Inches	Millimeters
H	0.126 ± 0.004 Dia.	3.2 ± 0.1 Dia.
J	0.10	2.5
K	0.061	1.55
L	0.059 Max.	1.5 Max.
M	0.047	1.2
N	0.035	0.8
P	0.02	0.5

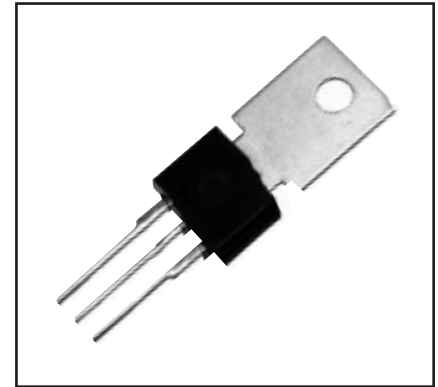

Description:

A triac is a solid state silicon AC switch which may be gate triggered from an off-state to an on-state for either polarity of applied voltage.

Features:

- Glass Passivation

Applications:

- AC Switch
- Motor Controls
- Lighting
- Solid State Relay

Ordering Information:

Example: Select the complete seven or eight digit part number you desire from the table - i.e. BCR3AM-8 is a 400 Volt, 3 Ampere Triac.

Type	V _{DRM} Volts	Code
BCR3AM	400	-8
	600	-12

BCR3AM

Triac

3 Amperes/400-600 Volts

Absolute Maximum Ratings, $T_a = 25^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	BCR3AM-8	BCR3AM-12	Units
Repetitive Peak Off-state Voltage	VDRM	400	600	Volts
Non-repetitive Peak Off-state Voltage	VDSM	500	720	Volts
On-state Current, $T_c = 86^\circ\text{C}$	IT(RMS)	3	3	Amperes
Non-repetitive Peak Surge, One Cycle (60 Hz)	ITSM	30	30	Amperes
I^2t for Fusing, $t = 8.3$ msec	I^2t	3.7	3.7	A ² sec
Peak Gate Power Dissipation, 20 msec	PGM	3	3	Watts
Average Gate Power Dissipation	PG(avg)	0.3	0.3	Watts
Peak Gate Current	IGM	0.5	0.5	Amperes
Peak Gate Voltage	VGM	6	6	Volts
Storage Temperature	T_{stg}	-40 to 125	-40 to 125	$^\circ\text{C}$
Operating Temperature	T_j	-40 to 125	-40 to 125	$^\circ\text{C}$
Weight	–	1.6	1.6	Grams

Electrical and Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics*	Symbol	Test Conditions (Trigger Mode)				BCR3AM			Units
		V_D	R_L	R_G	T_j	Min.	Typ.	Max.	
Gate Parameters									
DC Gate Trigger Current									
MT2+ Gate+	I_{GT}	6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	30	mA
MT2+ Gate–		6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	30	mA
MT2– Gate–		6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	30	mA
DC Gate Trigger Voltage									
MT2+ Gate+	V_{GT}	6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	1.5	Volts
MT2+ Gate–		6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	1.5	Volts
MT2– Gate–		6V	6 Ω	330 Ω	25 $^\circ\text{C}$	–	–	1.5	Volts
DC Gate Non-trigger Voltage									
All	V_{GD}	1/2 V_{DRM}	–	–	125 $^\circ\text{C}$	0.2	–	–	Volts

*Characteristic values apply for either polarity of Main Terminal 2 referenced to Main Terminal 1.


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction-to-case	$R_{th(j-c)}$	–	–	–	10	$^\circ\text{C}/\text{W}$
Steady State Thermal Resistance, Junction-to-ambient	$R_{th(j-a)}$	–	–	–	80	$^\circ\text{C}/\text{W}$
Voltage – Blocking State Repetitive Off-state Current	I_{DRM}	Gate Open Circuited, $V_D = V_{DRM}$, $T_j = 125^\circ\text{C}$	–	–	2	mA
Current – Conducting State Peak On-state Voltage	V_{TM}	$T_c = 25^\circ\text{C}$, $I_{TM} = 4.5\text{A}$	–	–	1.5	Volts
Critical Rate-of-rise of Commutating Off-state Voltage (Commutating dv/dt) (Switching)	$(dv/dt)_c$	$T_j = 125^\circ\text{C}$, $V_D = 400\text{V}$, Gate Open Circuited, Commutating $(di/dt) = -2\text{A}/\text{ms}$	5	–	–	$\text{V}/\mu\text{s}$

BCR3AM


Triac

3 Amperes/400-600 Volts


MAXIMUM ON-STATE CHARACTERISTICS

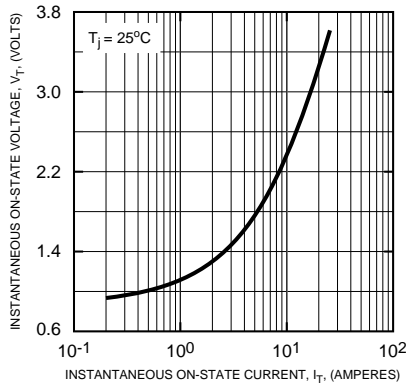


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION-TO-CASE, JUNCTION-TO-AMBIENT)

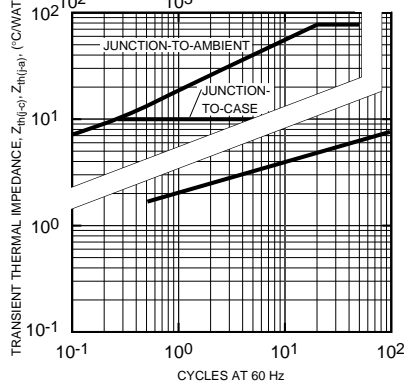


GATE CHARACTERISTICS (I, II, III)

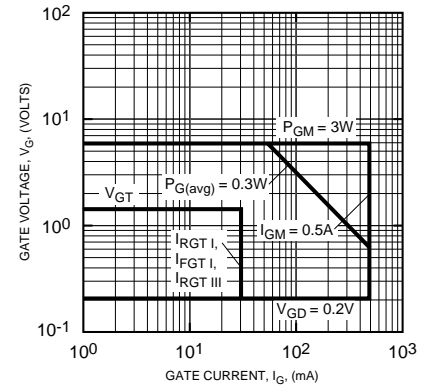


MAXIMUM SURGE CURRENT FOLLOWING RATED LOAD CONDITIONS

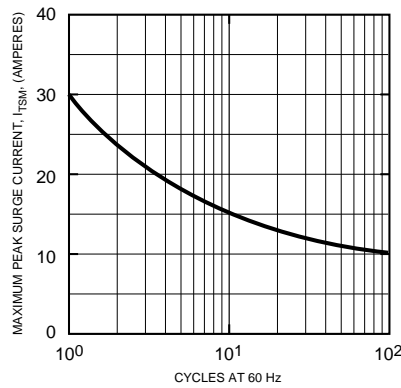


ALLOWABLE CASE TEMPERATURE VS. RMS ON-STATE CURRENT

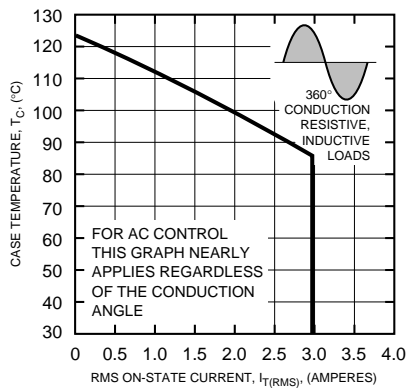


ALLOWABLE AMBIENT TEMPERATURE VS. RMS ON-STATE CURRENT

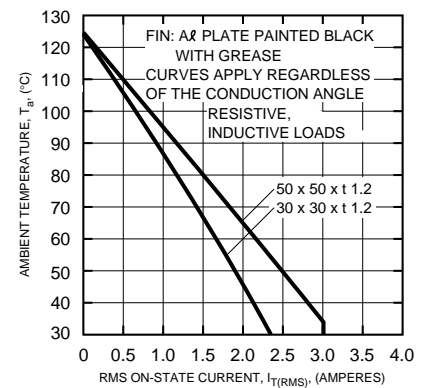


ALLOWABLE AMBIENT TEMPERATURE VS. RMS ON-STATE CURRENT

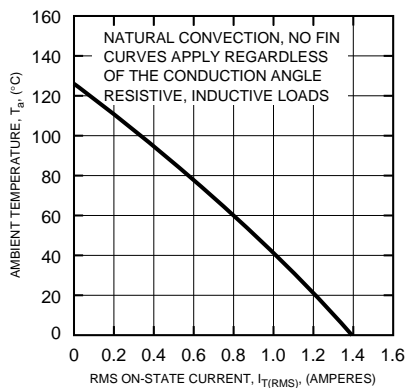

MAXIMUM ON-STATE POWER DISSIPATION

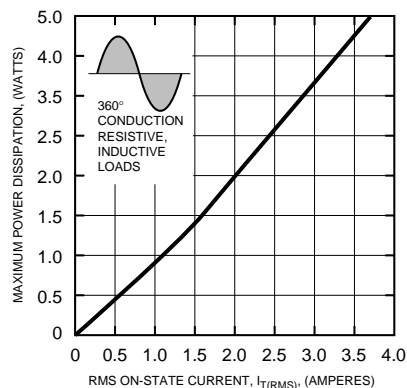

GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)

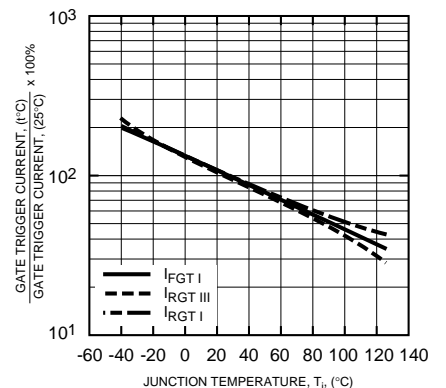


BCR3AM


Triac

3 Amperes/400-600 Volts


GATE TRIGGER VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

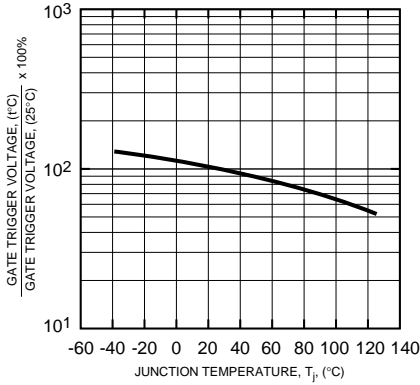


HOLDING CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)

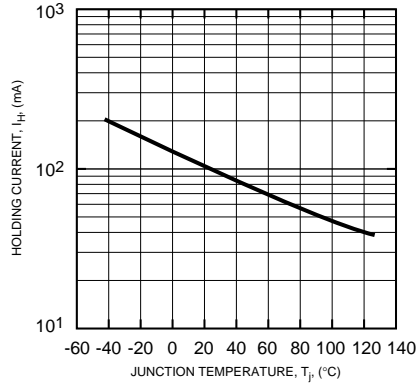


BREAKOVER VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

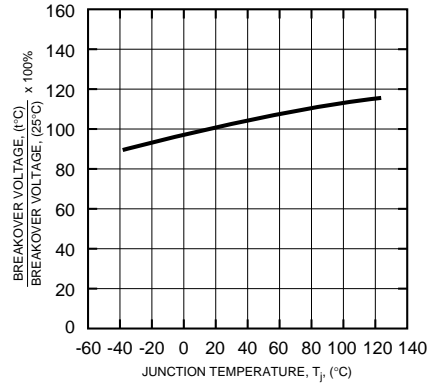


BREAKOVER VOLTAGE VS. RATE OF RISE OF OFF-STATE VOLTAGE (TYPICAL)

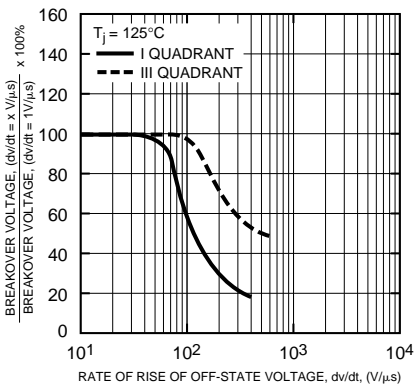


REPETITIVE PEAK OFF-STATE CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)

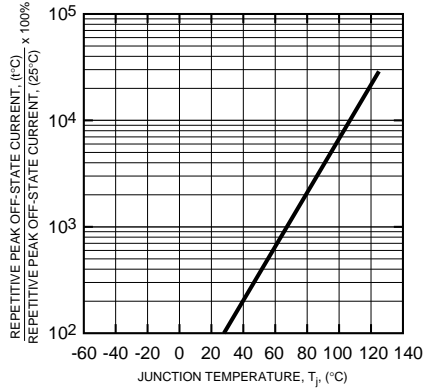


COMMUTATION CHARACTERISTICS (TYPICAL)

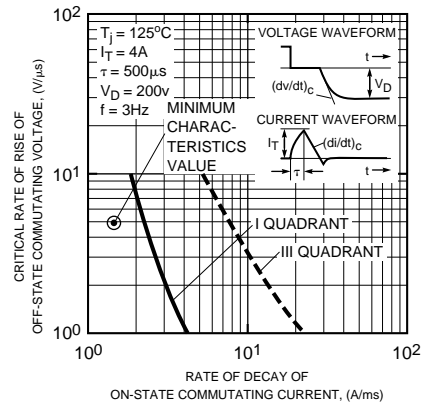

GATE TRIGGER CURRENT VS. GATE CURRENT PULSE WIDTH (TYPICAL)

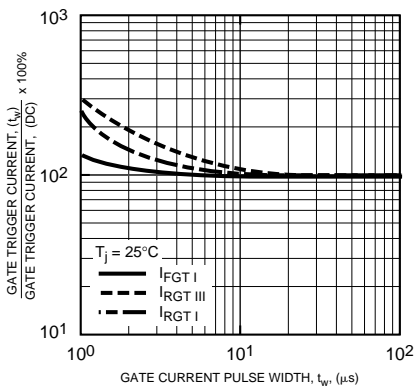

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

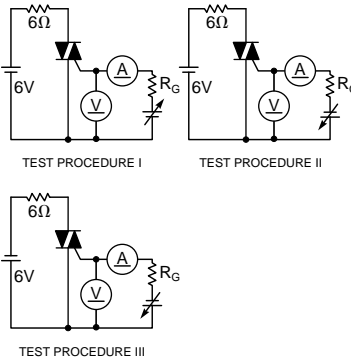



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.