

FEATURES

- Low Power Consumption.
- Low Temperature Coefficient.
- Output Short Circuit Protected.
- Wide Operating Voltage Range.
- Good Input Stability.
- Space-Saving Package: TO-92 or SOT-89


APPLICATIONS

- LCD for Printing Calculators
- Cameras
- Voltage References for Instrumentation

DESCRIPTION

The AIC1714 is a series of 3-terminal negative voltage regulators with output voltages internally set below the positive supply voltage. Since the AIC1714 consumes less current and only requires a small input/output voltage difference than existing industry standard 3-terminal voltage regulators, a battery-powered portable equipment is afforded a high capacity and longer service life. The AIC1714 is ideal for power source of liquid crystal displays.


TYPICAL APPLICATION CIRCUIT


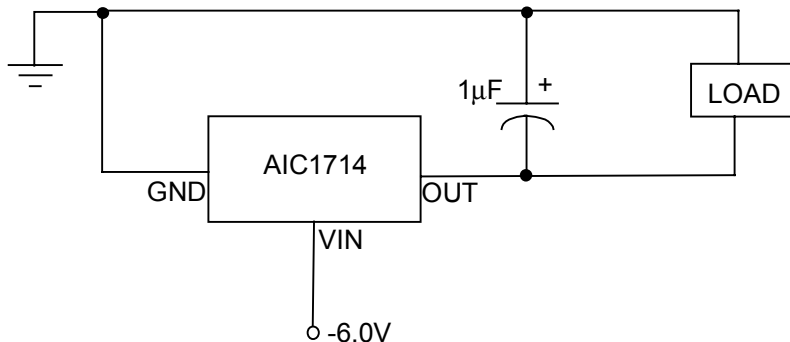


Negative Voltage Regulator

ORDERING INFORMATION

AIC1714-XX-XX

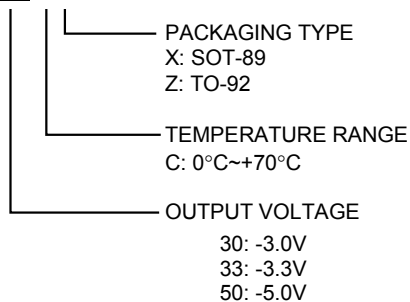


ORDER NUMBER	PIN CONFIGURATION
AIC1714-30CX AIC1714-33CX AIC1714-50CX (SOT-89)	FRONT VIEW 1: VIN 2: GND 3: VOUT 
AIC1714-30CZ AIC1714-33CZ AIC1714-50CZ (TO-92)	TOP VIEW 1: GND 2: VIN 3: VOUT 

■ ABSOLUTE MAXIMUM RATINGS

Supply Voltage	-13V
Operating Temperature Range	- 20°C~80°C
Storage Temperature Range	- 65°C~150°C
Power Dissipation	SOT-89 Package 0. 80W
	TO-92 Package 0.78W


■ TEST CIRCUIT

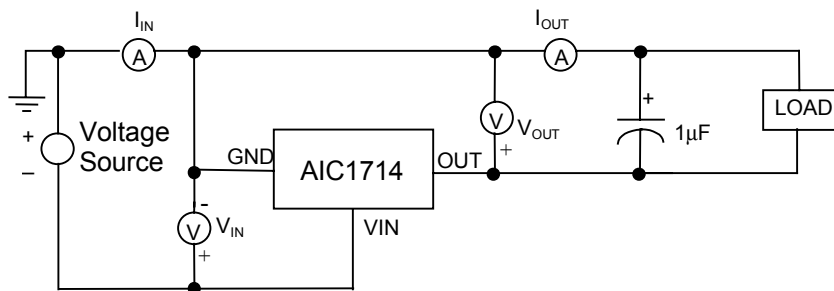





■ ELECTRICAL CHARACTERISTICS ($V_{IN} = -6.0V$, $T_a = 25^\circ C$, unless otherwise specified.)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Output Voltage	$I_{OUT} = 300\mu A$	AIC1714-30	-2.95	-3.0	-3.05	V
		AIC1714-33	-3.25	-3.3	-3.35	V
		AIC1714-50	-4.93	-5.0	-5.07	V
Load Regulation	$I_{OUT} = 0 \sim 5mA$	ΔV_{OUT}		20	100	mV
I/O Voltage Difference	$I_{OUT} = 300\mu A$	V_{DIFF}		50	200	mV
Supply Current	$I_{OUT} = 0$	I_{IN}		6	12	μA
Input Stability		$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$		0.05		%/V
Temperature Coefficient	$-25^\circ C \sim 85^\circ C$	T_C		50		ppm
Output Short Circuit Current	$R_{LOAD} = 0$		15	24		mA


■ BLOCK DIAGRAM

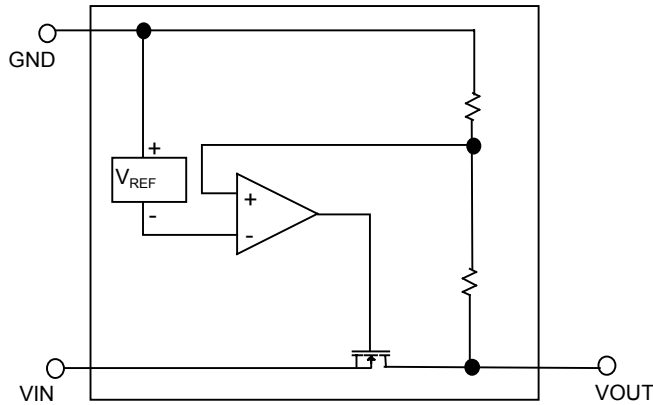

■ TYPICAL PERFORMANCE CHARACTERISTICS

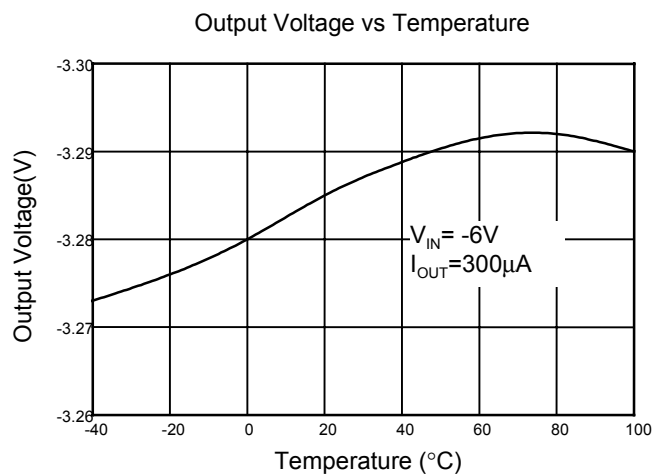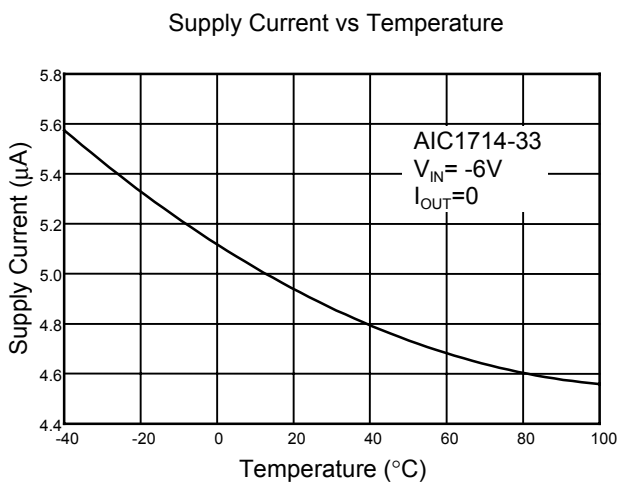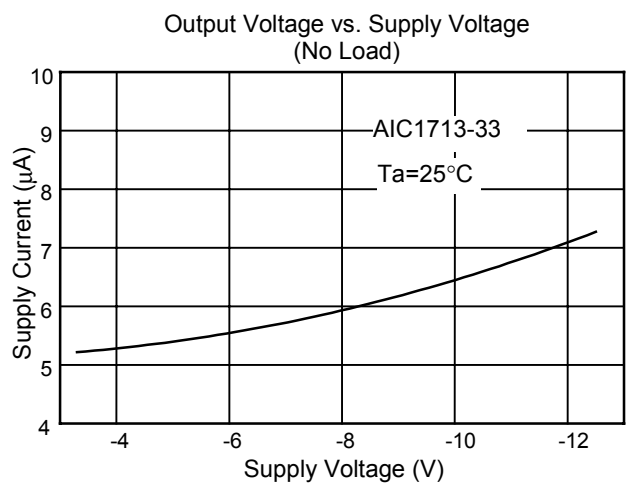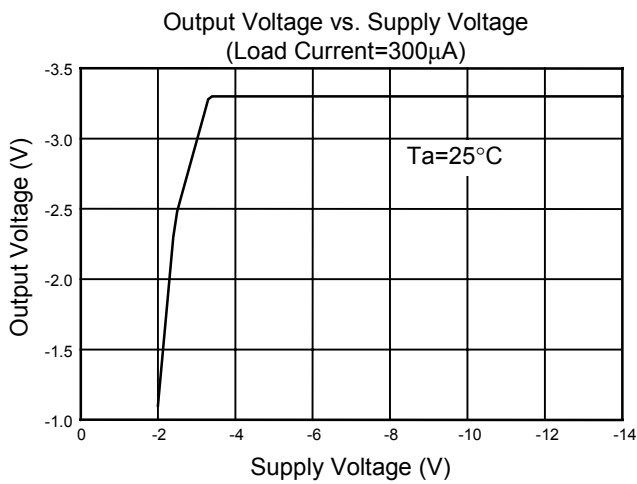


■ **TYPICAL PERFORMANCE CHARACTERISTICS** (Continued)

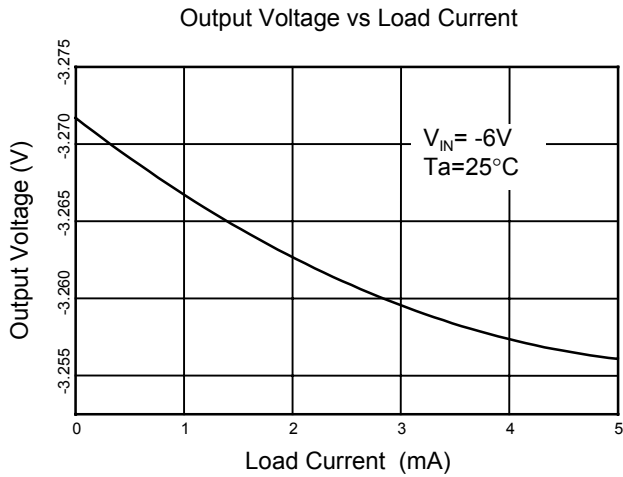

■ **PHYSICAL DIMENSIONS**

- SOT-89 (unit: mm)

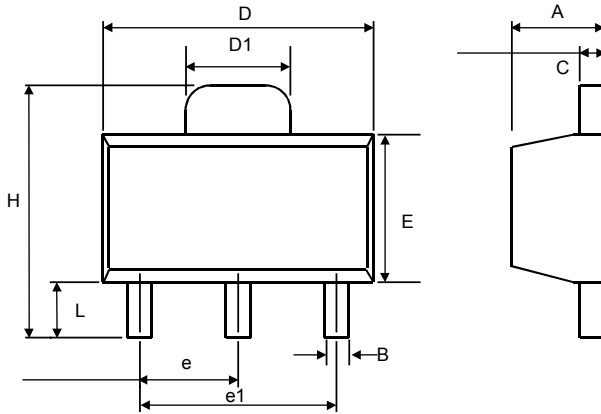


SYMBOL	MIN	MAX
A	1.40	1.60
B	0.36	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 (TYP.)	
e1	3.00 (TYP.)	
H	3.94	4.25
L	0.89	1.20

- SOT89 Marking

Part No.	Marking
AIC1714-30	AP30
AIC1714-33	AP33
AIC1714-50	AP50

- TO-92 (unit: mm)

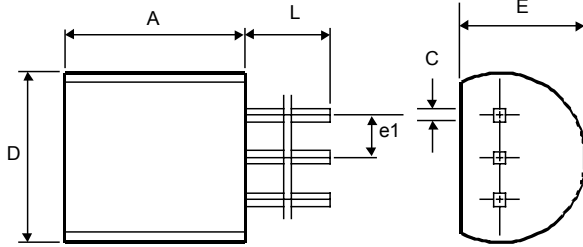

SYMBOL	MIN	MAX
A	4.32	5.33
C	0.38 (TYP.)	
D	4.40	5.20
E	3.17	4.20
e1	1.27 (TYP.)	
L	12.7	-



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.