


4TH GENERATION MOSFET

TO247-AD Package Outline.
Dimensions in mm (inches)

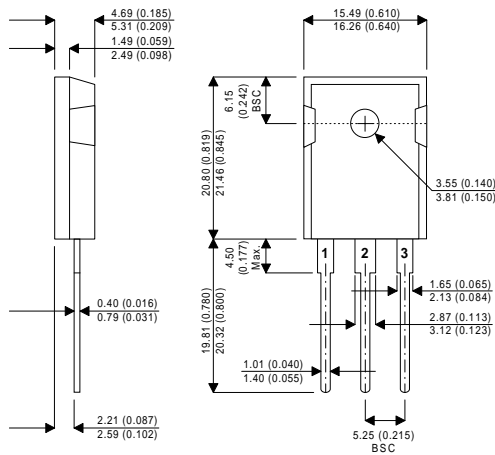

**N-CHANNEL
ENHANCEMENT MODE
HIGH VOLTAGE
POWER MOSFETS**

V_{DSS} 1000V
 $I_{D(cont)}$ 4.4A
 $R_{DS(on)}$ 4.00 Ω

Terminal 1 Gate **Terminal 2** Drain
Terminal 3 Source

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{DSS}	Drain – Source Voltage	1000	V
I_D	Continuous Drain Current	4.4	A
I_{DM}	Pulsed Drain Current ¹	17.6	A
V_{GS}	Gate – Source Voltage	± 30	V
P_D	Total Power Dissipation @ $T_{case} = 25^{\circ}C$	180	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	$^{\circ}C$
T_L	Lead Temperature : 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain – Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	1000			V
I_{DSS}	Zero Gate Voltage Drain Current ($V_{GS} = 0V$)	$V_{DS} = V_{DSS}$			250	μA
		$V_{DS} = 0.8V_{DSS}, T_C = 125^{\circ}C$			1000	
I_{GSS}	Gate – Source Leakage Current	$V_{GS} = \pm 30V, V_{DS} = 0V$			± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 1.0mA$	2		4	V
$I_{D(ON)}$	On State Drain Current ²	$V_{DS} > I_{D(ON)} \times R_{DS(ON)}^{Max}$ $V_{GS} = 10V$	4.4			A
$R_{DS(ON)}$	Drain – Source On State Resistance ²	$V_{GS} = 10V, I_D = 0.5 I_D [Cont.]$			4.00	Ω

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Pulse Test: Pulse Width < 380 μS , Duty Cycle < 2%

DYNAMIC CHARACTERISTICS

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input Capacitance	$V_{GS} = 0V$		805	950	pF
C_{oss}	Output Capacitance	$V_{DS} = 25V$		115	160	
C_{rss}	Reverse Transfer Capacitance	$f = 1MHz$		37	60	
Q_g	Total Gate Charge ³	$V_{GS} = 10V$		35	55	nC
Q_{gs}	Gate – Source Charge	$V_{DD} = 0.5 V_{DSS}$		4.3	6.5	
Q_{gd}	Gate – Drain (“Miller”) Charge	$I_D = I_D [Cont.] @ 25^\circ C$		18	27	
$t_{d(on)}$	Turn-on Delay Time	$V_{GS} = 15V$		12	23	ns
t_r	Rise Time	$V_{DD} = 0.5 V_{DSS}$		10	20	
$t_{d(off)}$	Turn-off Delay Time	$I_D = I_D [Cont.] @ 25^\circ C$		33	50	
t_f	Fall Time	$R_G = 1.8\Omega$		14	27	

SOURCE – DRAIN DIODE RATINGS AND CHARACTERISTICS

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	(Body Diode)			4.4	A
I_{SM}	Pulsed Source Current ¹	(Body Diode)			17.6	
V_{SD}	Diode Forward Voltage ²	$V_{GS} = 0V, I_S = -I_D [Cont.]$			1.3	V
t_{rr}	Reverse Recovery Time	$I_S = -I_D [Cont.], di_S / dt = 100A/\mu s$	150	290	580	ns
Q_{rr}	Reverse Recovery Charge		0.8	1.65	3.3	μC

SAFE OPERATING AREA CHARACTERISTICS

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
SOA1	Safe Operating Area	$V_{DS} = 0.4V_{DSS}, t = 1 \text{ Sec.}$ $I_{DS} = P_D / 0.4V_{DSS}$	180			W
SOA2	Safe Operating Area	$V_{DS} = P_D / I_D [Cont.]$ $I_{DS} = I_D [Cont.], t = 1 \text{ Sec.}$	180			W
I_{LM}	Inductive Current Clamped		17.6			A

THERMAL CHARACTERISTICS

	Characteristic	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction to Case			0.68	$^\circ C/W$
$R_{\theta JA}$	Junction to Ambient			40	

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Pulse Test: Pulse Width < 380 μs , Duty Cycle < 2%

3) See MIL–STD–750 Method 3471



CAUTION — Electrostatic Sensitive Devices. Anti-Static Procedures Must Be Followed.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.