


Power Integrated Module (PIM)


■ Features

- NPT-Technology
- Solderable Package
- Square SC SOA at $10 \times I_C$
- High Short Circuit Withstand-Capability
- Small Temperature Dependence of the Turn-Off Switching Loss
- Low Losses And Soft Switching

■ Equivalent Circuit

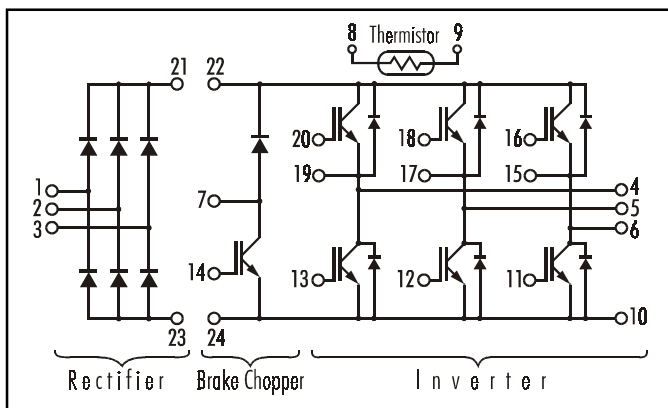

■ Outline Drawing

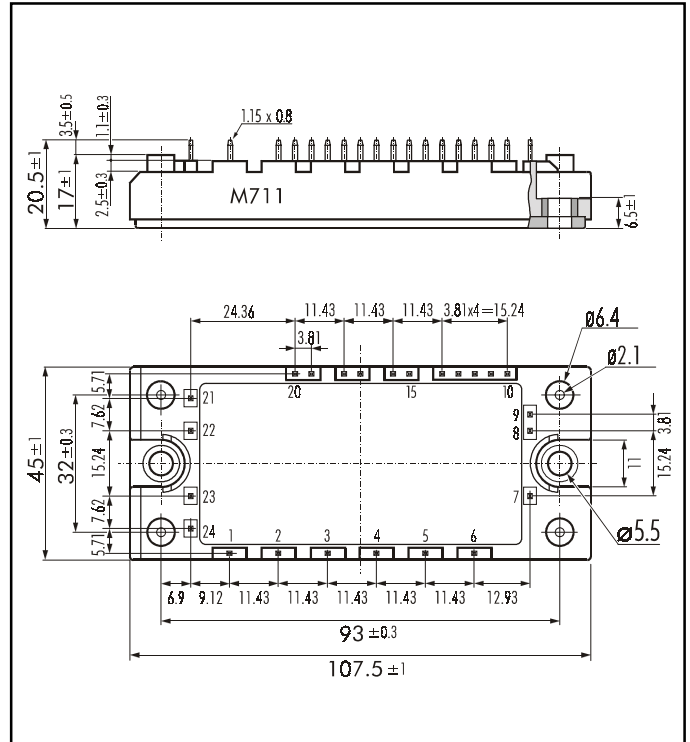

■ Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

	Items	Symbols	Test Conditions	Ratings	Units		
Inverter	Collector-Emitter Voltage	V_{CES}		1200	V		
	Gate -Emitter Voltage	V_{GES}		± 20			
	Collector Current	I_C		Continuous	$25^\circ\text{C} / 80^\circ\text{C}$	35 / 25	A
		$I_{C\ PULSE}$		1ms	$25^\circ\text{C} / 80^\circ\text{C}$	70 / 50	
		$-I_C\ PULSE$				25	
	Collector Power Dissipation	P_C	1 device	180	W		
Rectifier	Repetitive Peak Reverse Voltage	V_{RRM}		1600	V		
	Average Output Current	I_O	50Hz/60Hz sinus wave	25	A		
	Surge Current (Non Repetitive)	I_{FSM}	$T_j=150^\circ\text{C}$, 10 ms, sinus wave	260			
	I^2t (Non Repetitive)			338	A^2s		
Brake Chopper	Collector-Emitter Voltage	V_{CES}		1200	V		
	Gate -Emitter Voltage	V_{GES}		± 20			
	Collector Current	I_C		Continuous	$25^\circ\text{C} / 80^\circ\text{C}$	25 / 15	A
		$I_{C\ PULSE}$		1ms	$25^\circ\text{C} / 80^\circ\text{C}$	50 / 30	
		Collector Power Dissipation	P_C	1 device	110	W	
	Repetitive Peak Reverse Voltage	V_{RRM}		1200	V		
	Operating Junction Temperature	T_j		+150	$^\circ\text{C}$		
	Storage Temperature	T_{Stg}		-40 ~ +125			
	Isolation Voltage	V_{ISO}	A.C. 1min.	2500	V		
	Mounting Screw Torque*			3.5	Nm		







Note: *:Recommendable Value; 2.5 ~ 3.5 Nm (M5)







■ Electrical Characteristics (T_j=25°C)






Items		Symbols	Test Conditions	Min.	Typ.	Max.	Units	
Inverter	IGBT	Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V			1.0	mA
		Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =±20V			200	nA
		Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =25mA	5.5	7.2	8.5	V
		Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C = 25A	Chip	2.1		
					Terminal	2.2	2.7	
	Input Capacitance	C _{ies}	f=1MHz, V _{GE} =0V, V _{CE} =10V		3000		pF	
	Turn-on Time	t _{on}	V _{CC} = 600V		0.35	1.2	μs	
		t _{r,x}	I _C = 25A		0.25	0.6		
	Turn-off Time	t _{r,i}	V _{GE} = ±15V		0.10			
		t _{off}	R _G = 51Ω		0.45	1.0		
t _f		Inductive Load	0.08		0.3			
FRD	Diode Forward On-Voltage	V _F	I _F =25A	Chip	2.3		V	
				Terminal	2.4	3.2		
	Reverse Recovery Time	t _{rr}	I _F =25A			350	ns	
Rectifier	Forward Voltage	V _{FM}	I _F =25A	Chip	1.1		V	
				Terminal	1.2	1.5		
	Reverse Current	I _{RRM}	V _R =1600V			1.0	mA	
Brake Chopper	Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V			1.0	mA	
	Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =±20V			200	nA	
	Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =15A	Chip	2.10		V	
				Terminal	2.20	2.6		
	Turn-on Time	t _{on}	V _{CC} = 600V		0.35	1.2	μs	
		t _{r,x}	I _C = 15A		0.25	0.6		
	Turn-off Time	t _{off}	V _{GE} = ±15V		0.45	1.0		
t _f		R _G = 82Ω	0.08		0.3			
Reverse Current	I _{RRM}	V _R =1200V				1.0		mA
NTC	Resistance	R	T= 25°C			5000		
			T=100°C	465	495	520		
	B Value	B	T=25 / 50°C	3305	3375	3450	K	







■ Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance (1 device)	R _{th(j-c)}	Inverter IGBT			0.69	°C/W
		Inverter FRD			1.30	
		Brake IGBT			1.14	
		Rectifier Diode			0.90	
Contact Thermal Resistance	R _{th(c-f)}	With Thermal Compound		0.05		

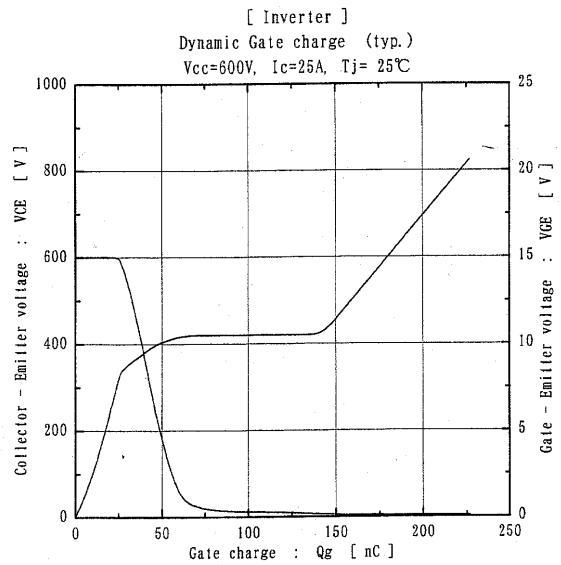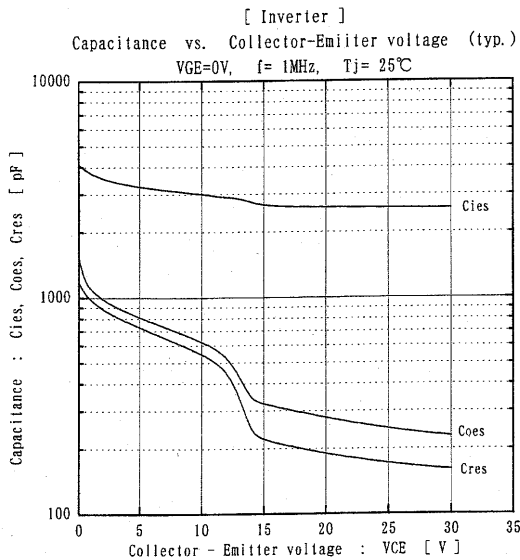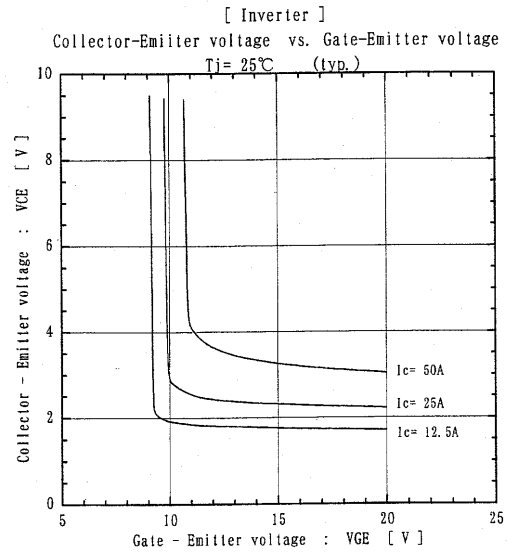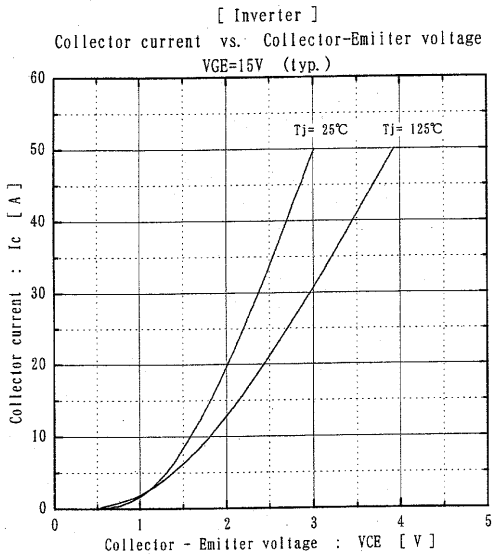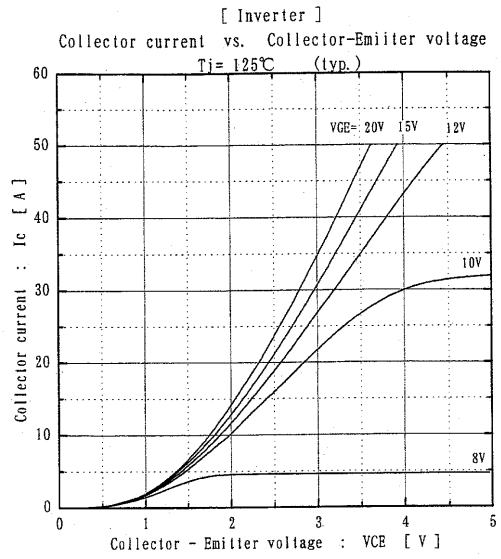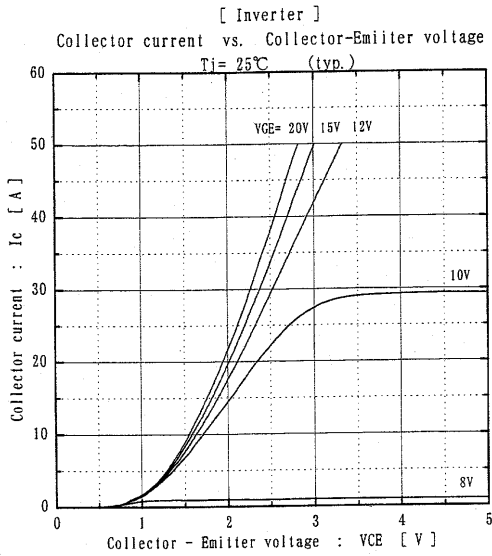

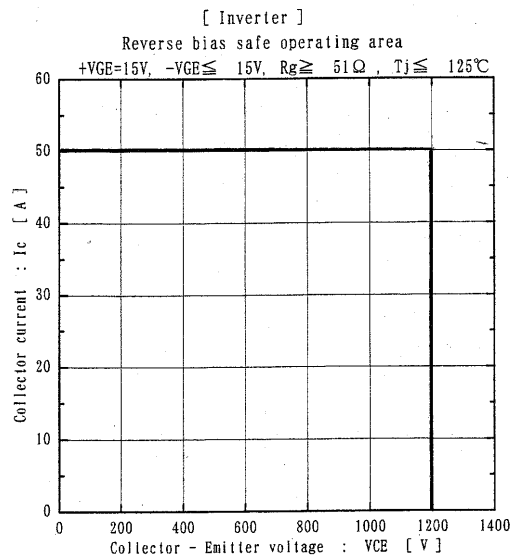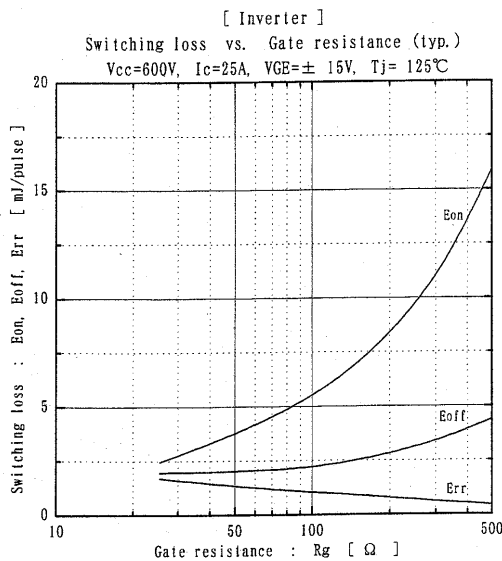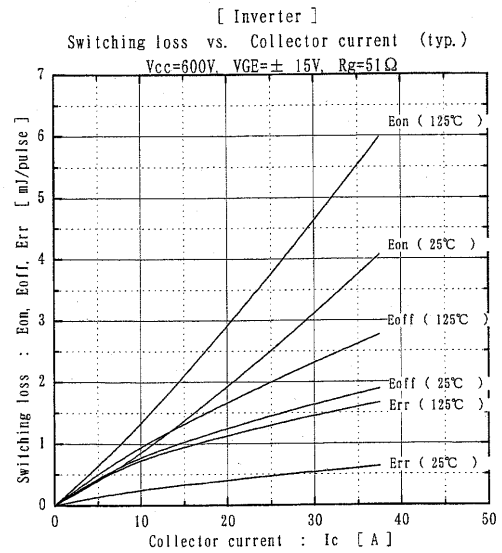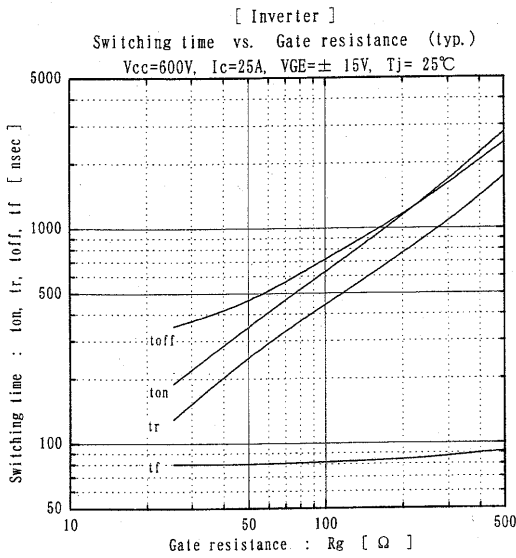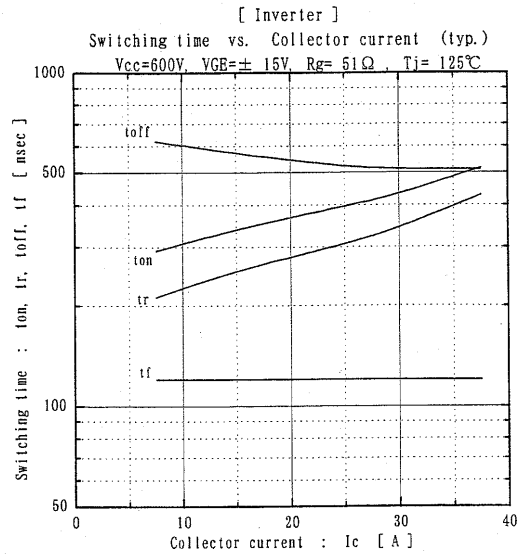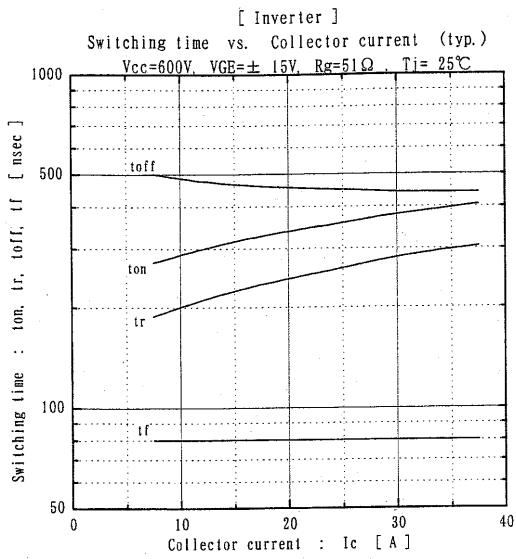

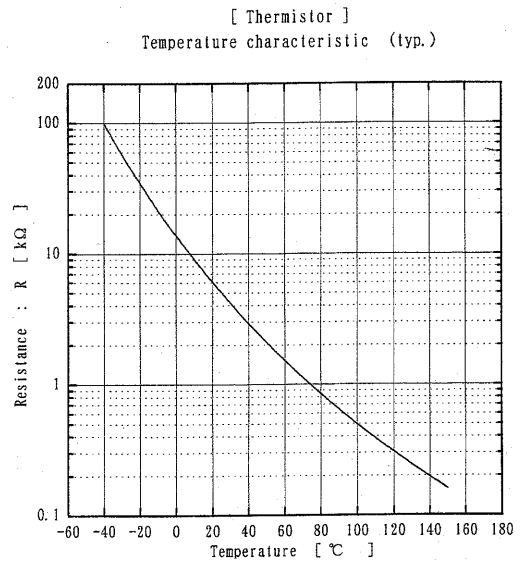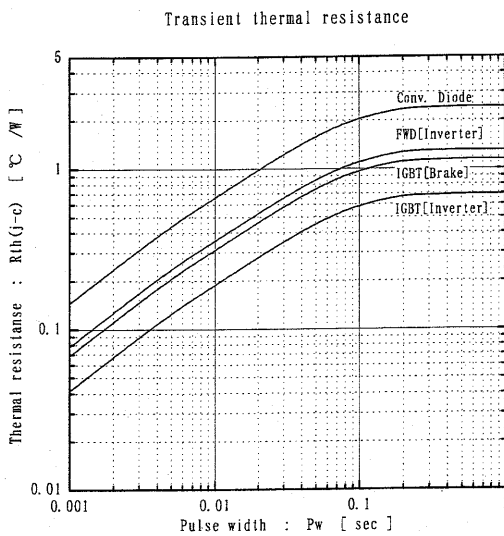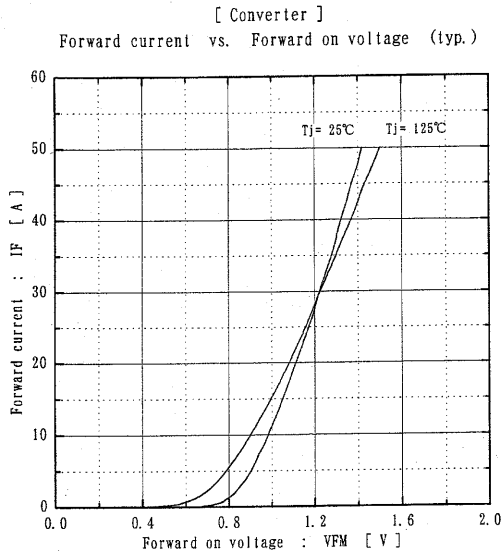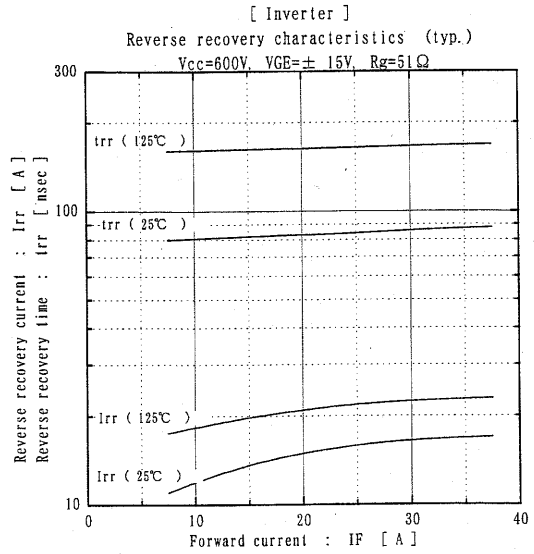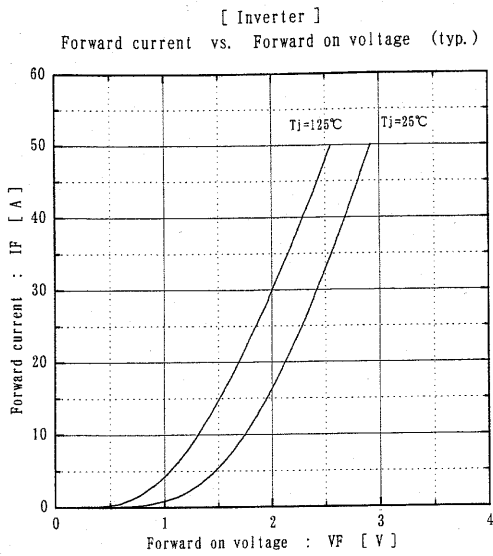

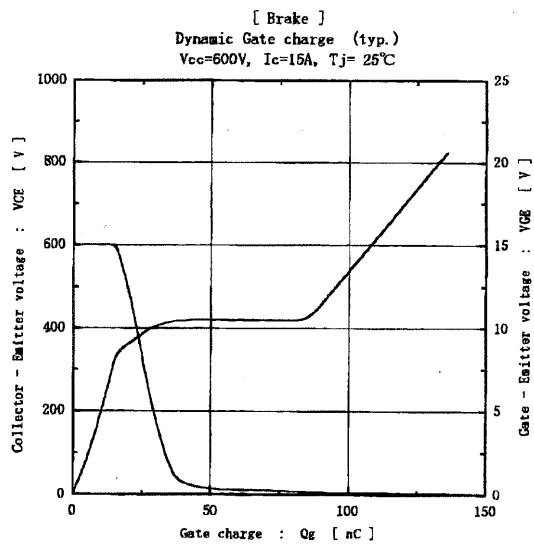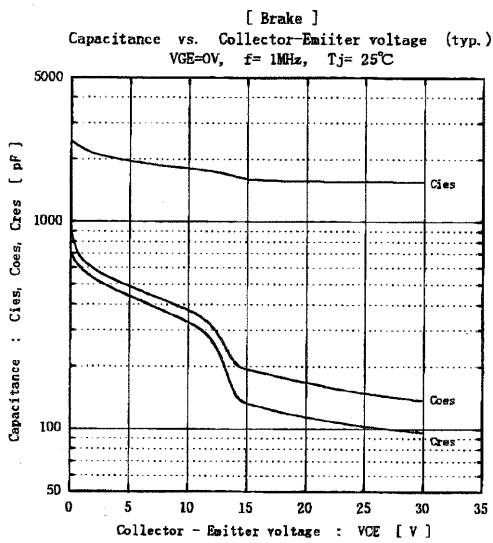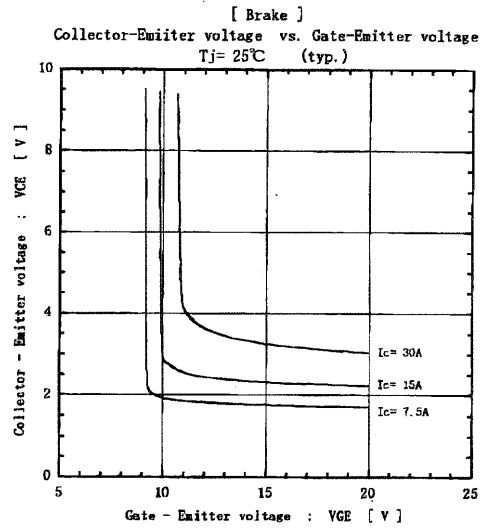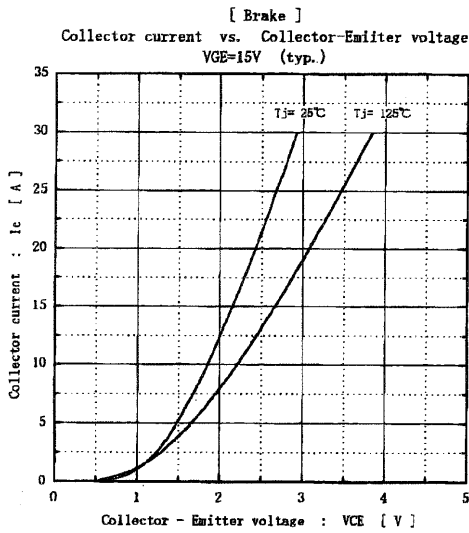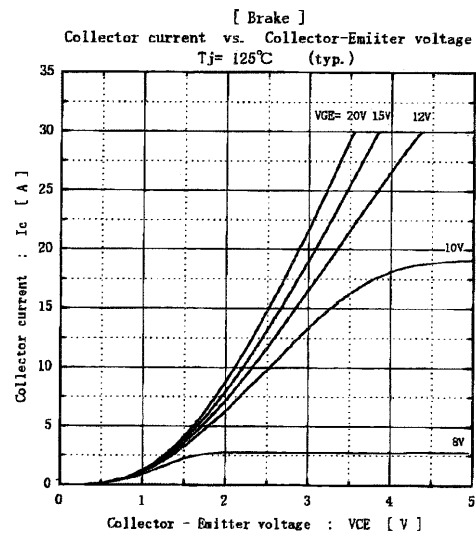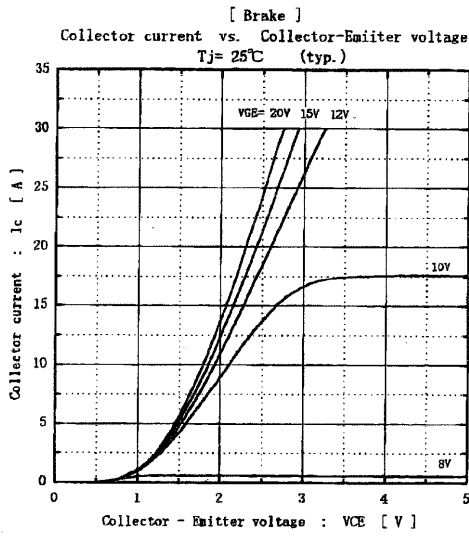

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.