


CT60AM-18B

RESONANT INVERTER USE


CT60AM-18B



- VCES 900V
- IC 60A
- Integrated Fast Recovery Diode

OUTLINE DRAWING

Dimensions in mm

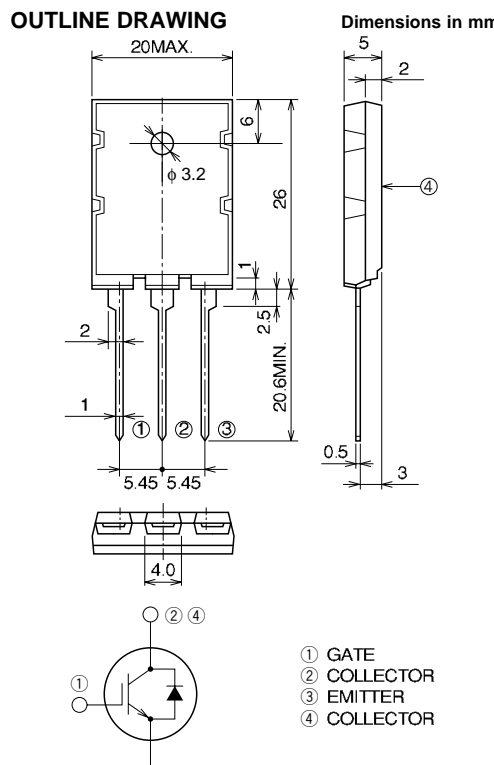

① GATE
② COLLECTOR
③ EMITTER
④ COLLECTOR

TO-3PL

APPLICATION

Microwave ovens, electromagnetic cooking devices, rice-cookers



MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CE} S	Collector-emitter voltage	V _{GE} = 0V	900	V
V _{GE} S	Gate-emitter voltage	V _{CE} = 0V	±20	V
V _{GEM}	Peak gate-emitter voltage	V _{CE} = 0V	±30	V
I _C	Collector current		60	A
I _{CM}	Collector current (Pulsed)		120	A
I _E	Emitter current		40	A
P _C	Maximum power dissipation	T _C = 25°C	200	W
T _J	Junction temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +150	°C


ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V (BR) CES	Collector-emitter breakdown voltage	I _C = 1mA, V _{GE} = 0V	900	—	—	V
I _{CES}	Collector-emitter leakage current	V _{CE} = 900V, V _{GE} = 0V	—	—	1	mA
I _{GES}	Gate-emitter leakage current	V _{GE} = ±20V, V _{CE} = 0V	—	—	±0.5	μA
V _{GE(th)}	Gate-emitter threshold voltage	V _{CE} = 10V, I _C = 6mA	2.0	4.0	6.0	V
V _{CE(sat)}	Collector-emitter saturation voltage	I _C = 60A, V _{CE} = 15V	—	2.0	2.7	V
C _{ies}	Input capacitance	V _{CE} = 25V, V _{GE} = 0V, f = 1MHz	—	5000	—	pF
C _{oes}	Output capacitance		—	125	—	pF
C _{res}	Reverse transfer capacitance		—	85	—	pF
t _{d (on)}	Turn-on delay time	I _C = 60A, Resistance load, V _{CC} = 300V, V _{GE} = 15V, R _G = 10Ω	—	0.05	—	μs
t _r	Rise time		—	0.12	—	μs
t _{d (off)}	Turn-off delay time		—	0.30	—	μs
t _f	Fall time		—	0.25	—	μs
E _{tail}	Tail loss		I _{CP} = 60A, T _J = 125°C, dv/dt = 200V/μs	—	0.6	1.0
I _{Ctail}	Collector tail current		—	6	12	A
V _{EC}	Emitter-collector voltage	I _E = 60A, V _{GE} = 0V	—	—	3	V
T _{rr}	Reverse recovery time	I _E = 60A, di/dt = 20A/μs	—	0.5	2	μs
R _{th (j-c)}	Thermal resistance (IGBT part)	Junction to case	—	—	0.63	°C/W
R _{th (j-c)}	Thermal resistance	Junction to case	—	—	4.0	°C/W


PERFORMANCE CURVES

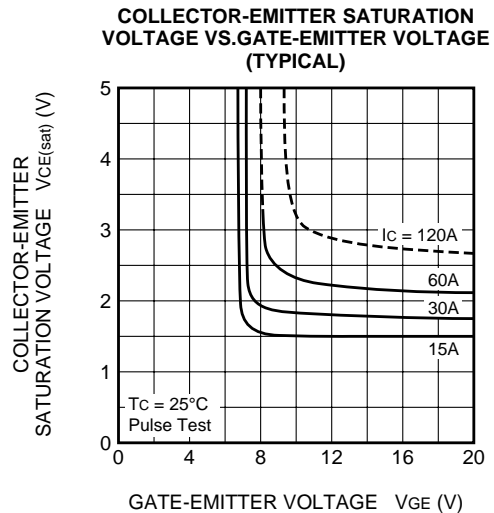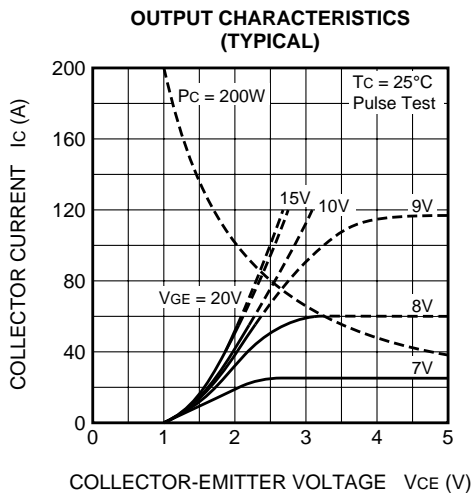


COLLECTOR CURRENT VS. GATE-EMITTER VOLTAGE (TYPICAL)

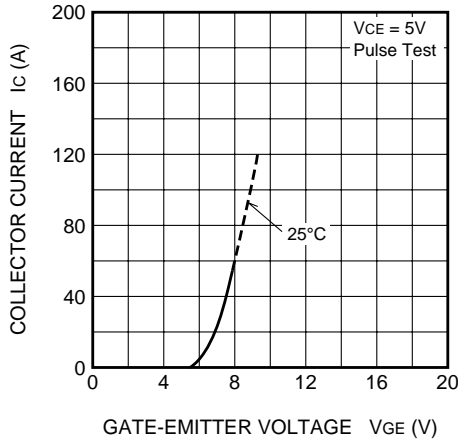


CAPACITANCE VS. COLLECTOR-EMITTER VOLTAGE (TYPICAL)

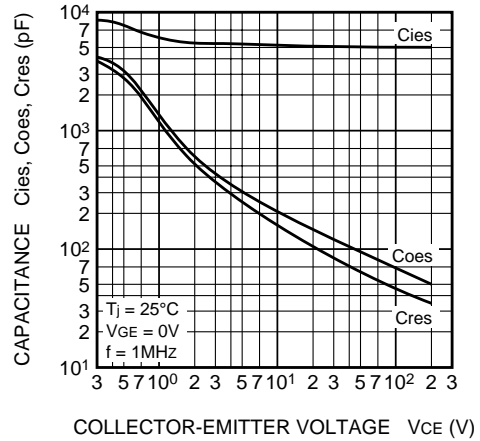


SWITCHING CHARACTERISTICS (TYPICAL)

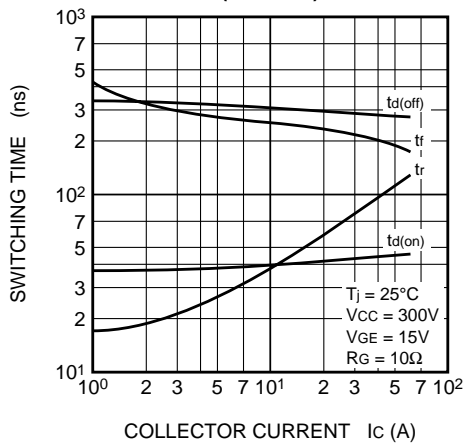


SWITCHING TIME VS. GATE RESISTANCE (TYPICAL)

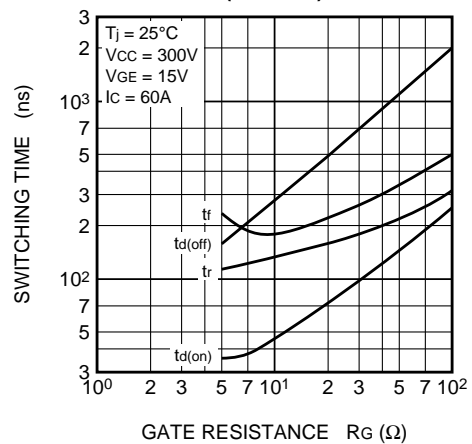

GATE-EMITTER VOLTAGE VS. GATE CHARGE CHARACTERISTIC (TYPICAL)

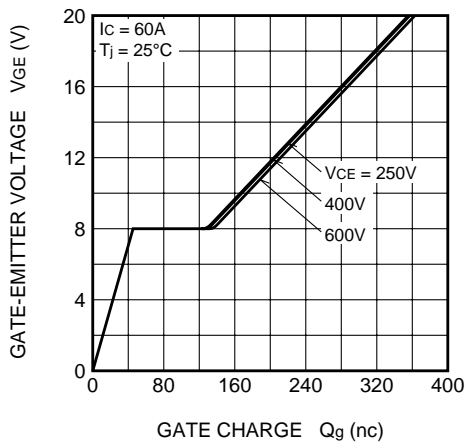


TRANSFER CHARACTERISTICS (TYPICAL)

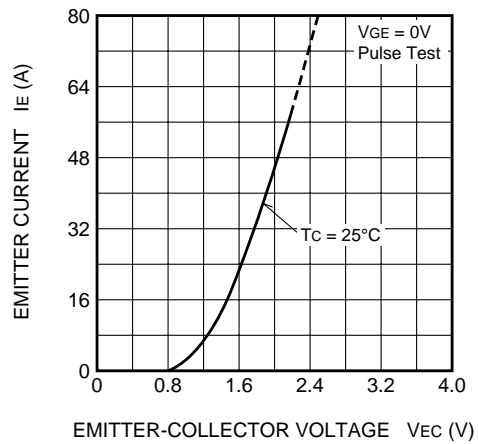


CT60AM-18B

RESONANT INVERTER USE


THRESHOLD VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

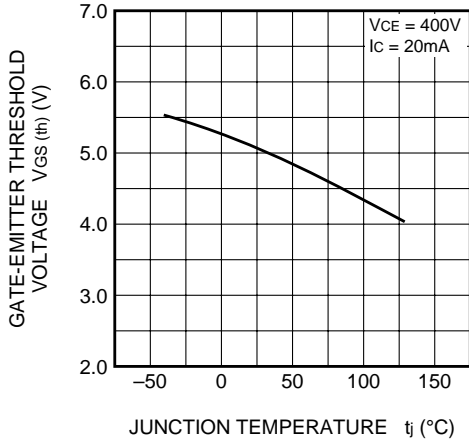


BREAKDOWN VOLTAGE VS. JUNCTION TEMPERATURE (TYPICAL)

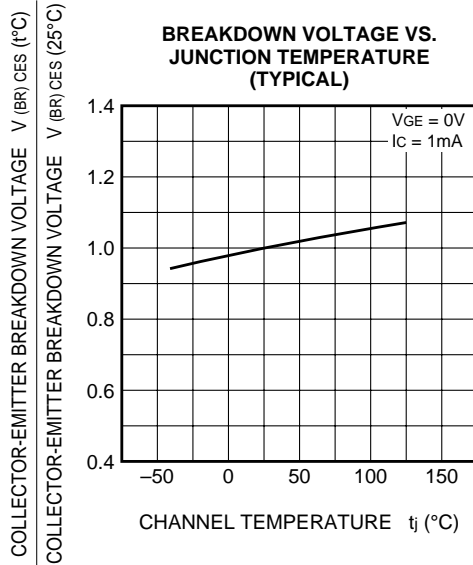

IGBT TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

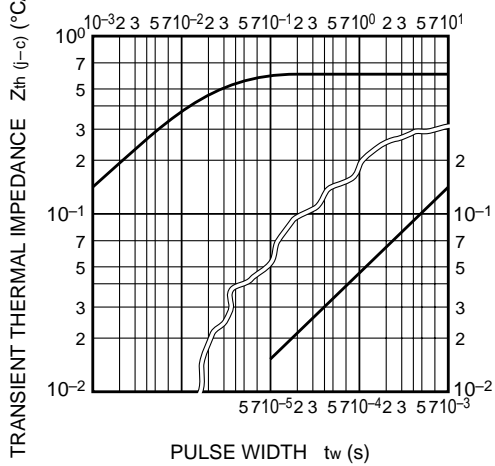

DIODE TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

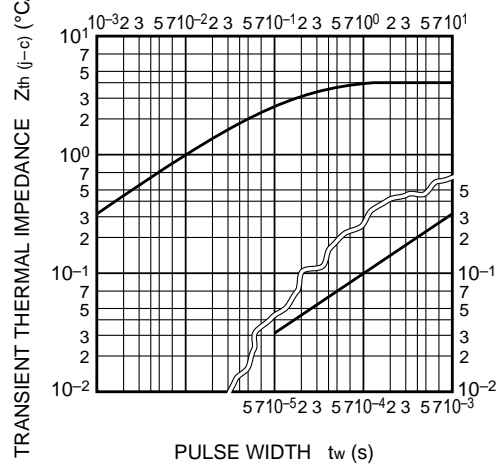



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.