


Common Cathode Fast Recovery Epitaxial Diode (FRED)


DSEK 60

$I_{FAVM} = 2 \times 34 \text{ A}$
 $V_{RRM} = 200 \text{ V}$
 $t_{rr} = 35 \text{ ns}$


V_{RSM} V	V_{RRM} V	Type
200	200	DSEK 60-02A
200	200	DSEK 60-02AR



TO-247 AD
Version A



ISOPLUS 247™
Version AR



A = Anode, C = Cathode

Symbol	Test Conditions	Maximum Ratings per leg	
I_{FRMS}	$T_{VJ} = T_{VJM}$	50	A
I_{FAVM}	* $T_C = 115^\circ\text{C}$; rectangular, $d = 0.5$	34	A
I_{FRM}	$t_p < 10 \mu\text{s}$; rep. rating, pulse width limited by T_{VJM}	375	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	325	A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	350	A
	$T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	290	A
	$t = 8.3 \text{ ms}$ (60 Hz), sine	310	A
I^2t	$T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	530	A ² s
	$t = 8.3 \text{ ms}$ (60 Hz), sine	510	A ² s
	$T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine	420	A ² s
	$t = 8.3 \text{ ms}$ (60 Hz), sine	400	A ² s
T_{VJ}		-40...+150	°C
T_{VJM}		150	°C
T_{stg}		-40...+150	°C
P_{tot}	$T_C = 25^\circ\text{C}$	125	W
M_d *	Mounting torque with screw M3	0.45-0.55/4-5	Nm/lb.in.
	Mounting torque with screw M3.5	0.45-0.55/4-5	Nm/lb.in.
V_{ISOL} **	50/60 Hz, RMS, $t = 1 \text{ minute}$, leads-to-tab	2500	V~
Weight		6	g

* Version A only; ** Version AR only

Symbol	Test Conditions	Characteristic Values per leg	
		typ.	max.
I_R	$T_{VJ} = 25^\circ\text{C}$	$V_R = V_{RRM}$	200 μA
	$T_{VJ} = 25^\circ\text{C}$	$V_R = 0.8 \cdot V_{RRM}$	50 μA
	$T_{VJ} = 125^\circ\text{C}$	$V_R = 0.8 \cdot V_{RRM}$	5 mA
V_F	$I_F = 30 \text{ A}$; $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$		0.85 V
			1.10 V
V_{T0}	For power-loss calculations only		0.72 V
r_T	$T_{VJ} = T_{VJM}$		4.2
$m\Omega$			
R_{thJC}			1 K/W
R_{thCH}		0.5	K/W
t_{rr}	$I_F = 1 \text{ A}$; $-di/dt = 100 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$	35	50ns
I_{RM}	$V_R = 100 \text{ V}$; $I_F = 30 \text{ A}$; $-di_F/dt = 100 \text{ A}/\mu\text{s}$ $L \leq 0.05 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$		4
			5 A

* I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle $d = 0.5$
Data according to IEC 60747 refer to a single diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behavior
- Epoxy meets UL 94V-0 flammability classification
- Version AR isolated and UL registered E153432

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

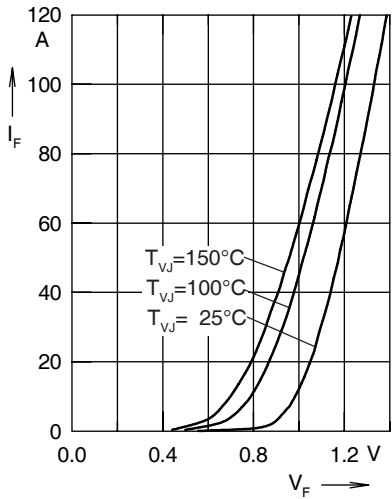


Fig. 1 Forward current I_F versus V_F

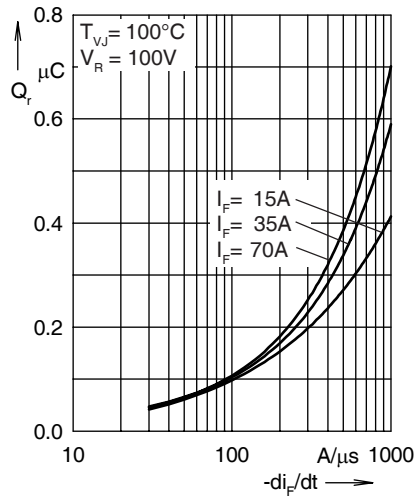


Fig. 2 Typ. reverse recovery charge Q_r versus $-di_F/dt$

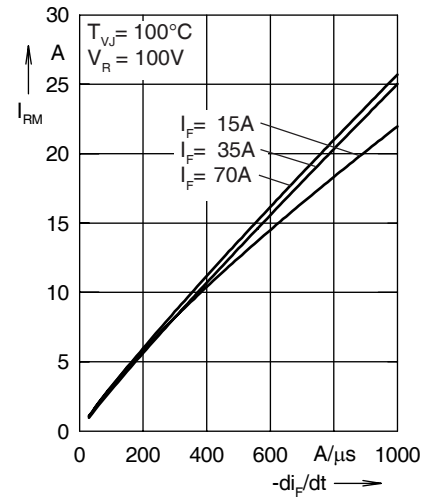


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

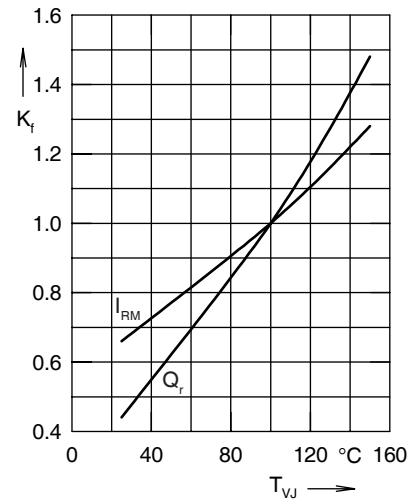


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

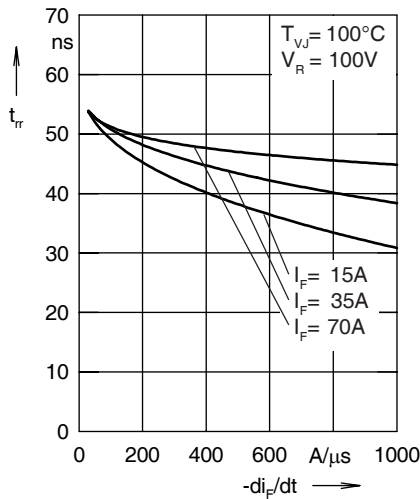


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

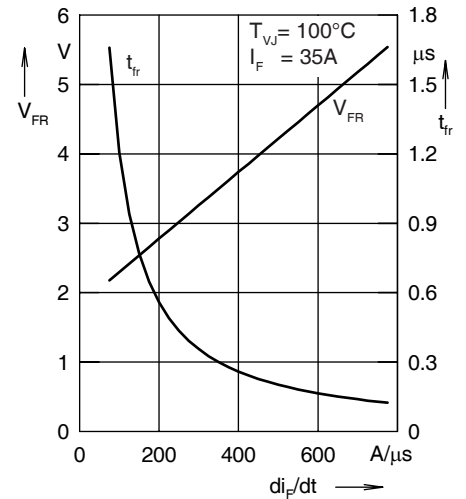


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt


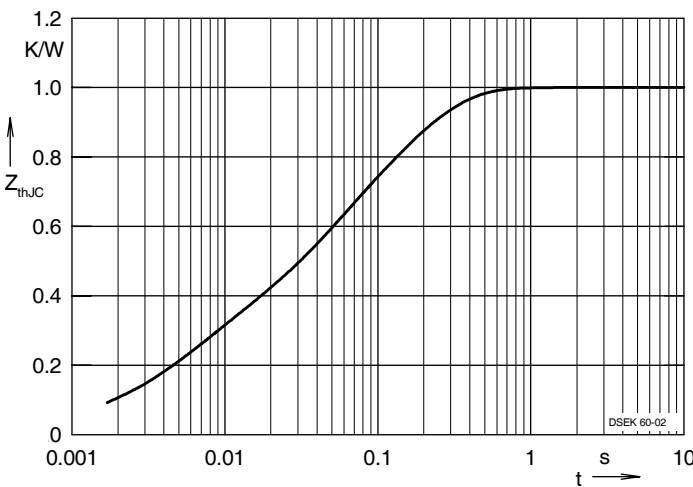


Fig. 7 Transient thermal impedance junction to case

Dimensions



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	2.2	2.54	0.087	0.102



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.