



# HiPerFRED™ Epitaxial Diode with soft recovery

**$I_{FAV} = 30\text{ A}$**   
 **$V_{RRM} = 600\text{ V}$**   
 **$t_{rr} = 30/35\text{ ns}$**


$V_{RSM}$ V	$V_{RRM}$ V	Type
600	600	DSEP 30-06A
600	600	DSEP 30-06B
600	600	DSEP 30-06BR



**TO-247 AD**  
Version A



**ISOPLUS 247™**  
Version BR



A = Anode, C = Cathode

Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$		70	A
$I_{FAVM}$	rect., $d = 0.5$ ; $T_C$ (Vers. A) = 135°C $T_C$ (Vers. B) = 125°C; $T_C$ (Vers. BR) = 115°C	30	A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10\text{ ms}$ (50 Hz), sine	250	A
$E_{AS}$	$T_{VJ} = 25^\circ\text{C}$ ; non-repetitive $I_{AS} = 1.3\text{ A}$ ; $L = 180\ \mu\text{H}$	0.2	mJ
$I_{AR}$	$V_A = 1.5 \cdot V_R$ typ.; $f = 10\text{ kHz}$ ; repetitive	0.1	A
$T_{VJ}$		-55...+175	°C
$T_{VJM}$		175	°C
$T_{stg}$		-55...+150	°C
$P_{tot}$	$T_C = 25^\circ\text{C}$ (Vers. BR)	165 135	W W
$M_d^*$	mounting torque	0.8...1.2	Nm
$F_C$	mounting force with clip	20...120	N
$V_{ISOL}^{**}$	50/60 Hz, RMS, $t = 1\text{ minute}$ , leads-to-tab	2500	V~
Weight	typical	6	g

\* Version A only; \*\* Version BR only

Symbol	Conditions	Characteristic max. Values		
		Vers. A	Vers. B	
$I_R$ ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 150^\circ\text{C}$ $V_R = V_{RRM}$	250 1	250 2	$\mu\text{A}$ mA
$V_F$ ②	$I_F = 30\text{ A}$ ; $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$	1.25 1.60	1.56 2.51	V V
$R_{thJC}$		0.9	0.9	K/W
$R_{thJC}$	Version BR		1.1	K/W
$R_{thCH}$	typ.	0.25	0.25	K/W
$t_{rr}$ typ.	$I_F = 1\text{ A}$ ; $-di/dt = 200\text{ A}/\mu\text{s}$ ; $V_R = 30\text{ V}$ ; $T_{VJ} = 25^\circ\text{C}$	35	30	ns
$I_{RM}$ typ.	$V_R = 100\text{ V}$ ; $I_F = 50\text{ A}$ ; $-di_F/dt = 100\text{ A}/\mu\text{s}$ $T_{VJ} = 100^\circ\text{C}$	6	4	A

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %

② Pulse Width = 300  $\mu\text{s}$ , Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified.

IXYS reserves the right to change limits, test conditions and dimensions.

## Features

- International standard package
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Soft recovery behaviour
- Epoxy meets UL 94V-0
- Version ..R isolated and UL registered E153432

## Applications

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

## Advantages

- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low  $I_{RM}$  reduces:
  - Power dissipation within the diode
  - Turn-on loss in the commutating switch

Dimensions see [Outlines.pdf](#)

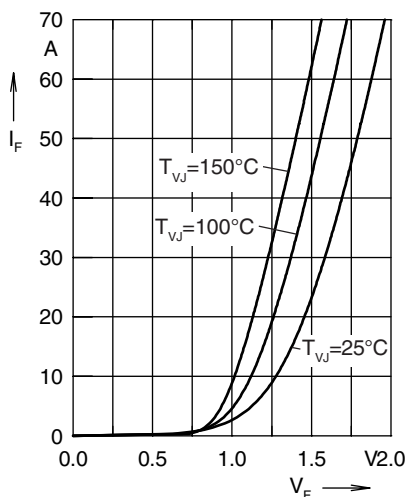


Fig. 1 Forward current  $I_F$  versus  $V_F$

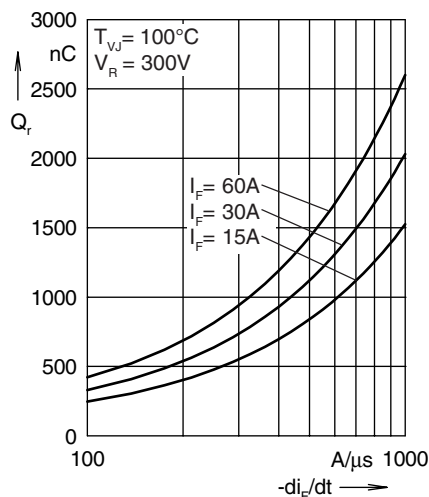


Fig. 2 Reverse recovery charge  $Q_r$  versus  $-di_F/dt$

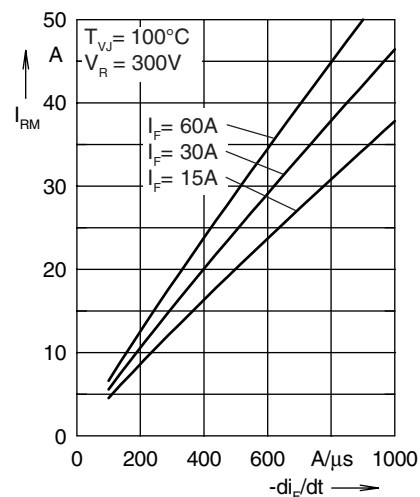


Fig. 3 Peak reverse current  $I_{RM}$  versus  $-di_F/dt$

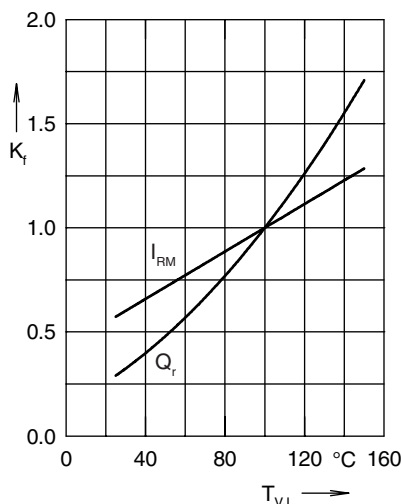


Fig. 4 Dynamic parameters  $Q_r$ ,  $I_{RM}$  versus  $T_{VJ}$

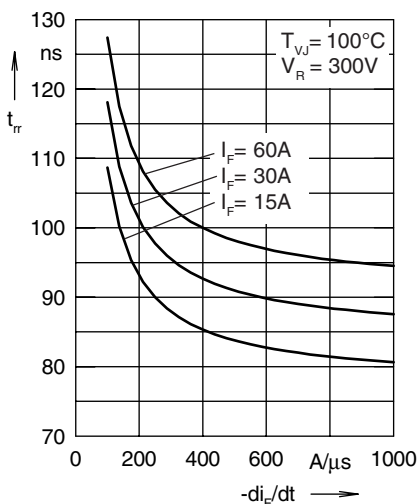


Fig. 5 Recovery time  $t_{rr}$  versus  $-di_F/dt$

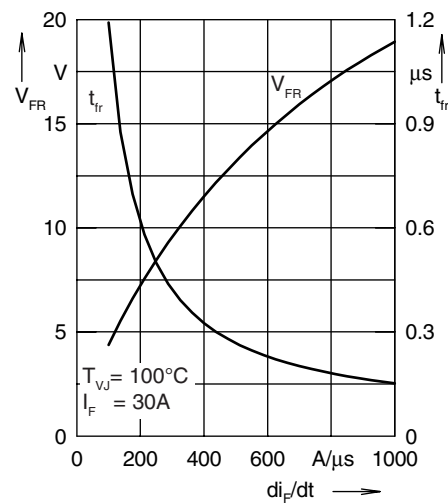


Fig. 6 Peak forward voltage  $V_{FR}$  and  $t_{tr}$  versus  $di_F/dt$

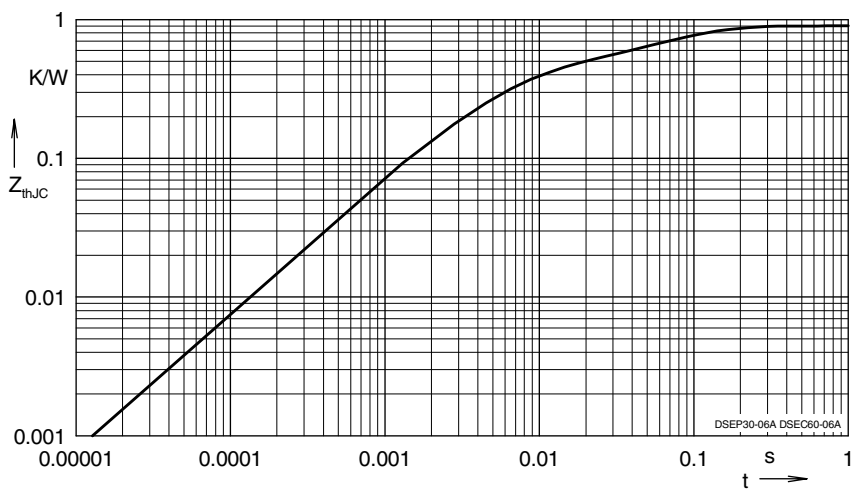


Fig. 7 Transient thermal resistance junction to case

Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.465	0.0052
2	0.179	0.0003
3	0.256	0.0396

NOTE: Fig. 2 to Fig. 6 shows typical values

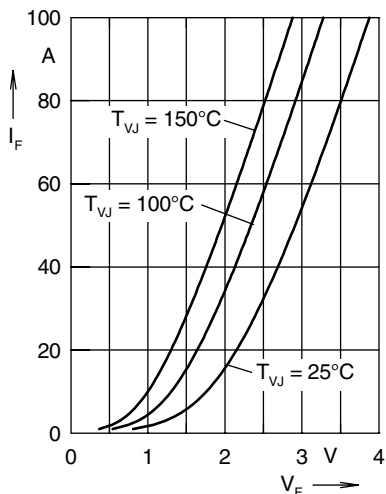


Fig. 1 Forward current  $I_F$  versus  $V_F$

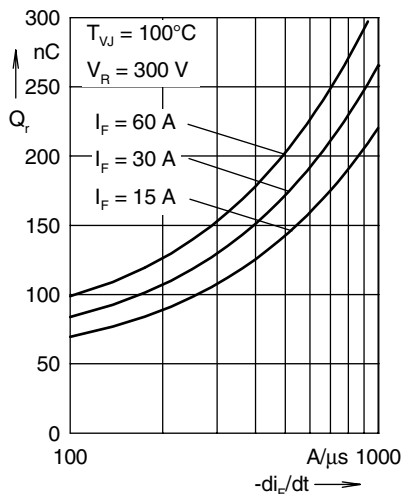


Fig. 2 Reverse recovery charge  $Q_r$  versus  $-di_F/dt$

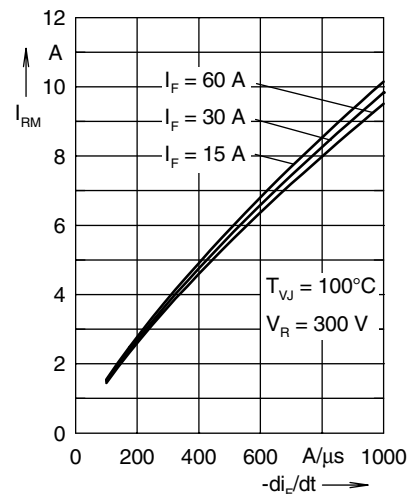


Fig. 3 Peak reverse current  $I_{RM}$  versus  $-di_F/dt$

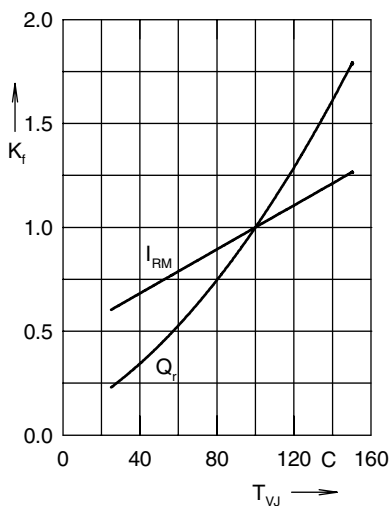


Fig. 4 Dynamic parameters  $Q_r$ ,  $I_{RM}$  versus  $T_{VJ}$

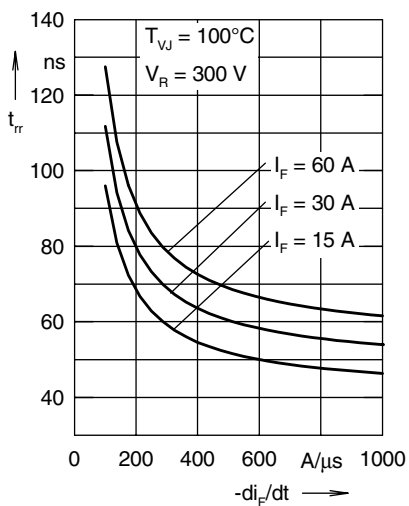


Fig. 5 Recovery time  $t_{tr}$  versus  $-di_F/dt$

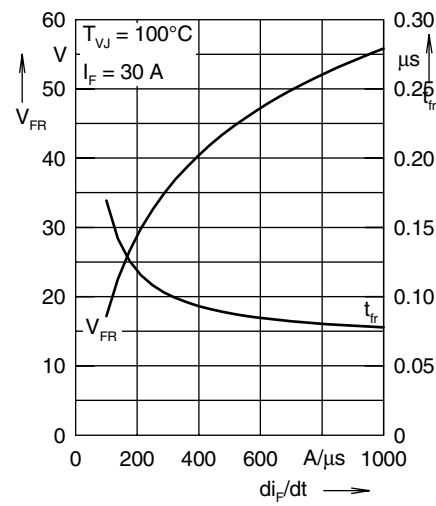


Fig. 6 Peak forward voltage  $V_{FR}$  and  $t_{tr}$  versus  $di_F/dt$

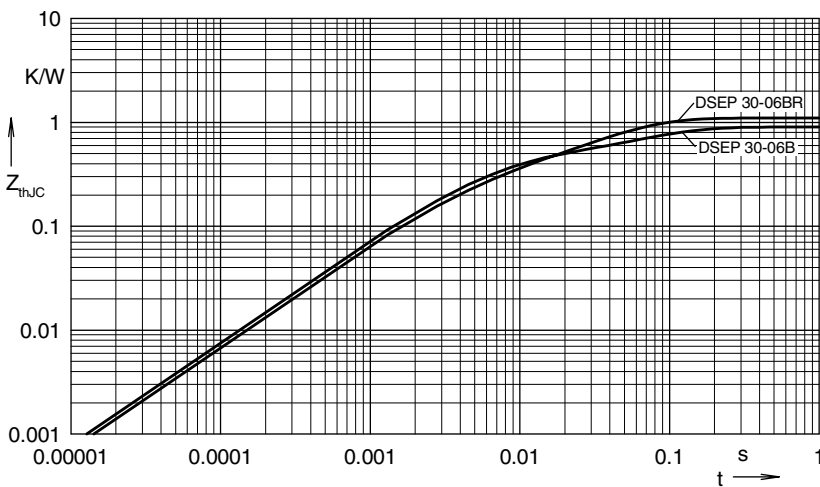


Fig. 7 Transient thermal resistance junction to case

Constants for  $Z_{thJC}$  calculation ..B:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.465	0.0052
2	0.179	0.0003
3	0.256	0.0397

Constants for  $Z_{thJC}$  calculation ..BR:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.368	0.0052
2	0.1417	0.0003
3	0.0295	0.0004
4	0.5604	0.0092

NOTE: Fig. 2 to Fig. 6 shows typical values



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.