

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

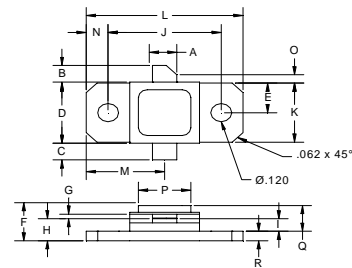
The **ASI AJT030** is Designed for 960 – 1215 MHz, JTIDS Applications.

FEATURES:

- Internal Input/Output Matching Network
- $P_G = 7.8$ dB at 30 W/ 1215 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	3.5 A
V_{CC}	40 V
P_{DISS}	75 W @ $T_C \leq 85$ °C
T_J	-65 °C to +250 °C
T_{STG}	-65 °C to +200 °C
θ_{JC}	2.2 °C/W

PACKAGE STYLE .400 2L FLG


DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.140 / 3.56	
B	.110 / 2.80	
C	.110 / 2.80	
D	.395 / 10.03	.407 / 10.34
E	.193 / 4.90	
F		.230 / 5.84
G	.003 / 0.08	.006 / 0.15
H	.118 / 3.00	.131 / 3.33
I	.063 / 1.60	
J	.650 / 16.51	
K	.386 / 9.80	
L	.900 / 22.86	
M	.450 / 11.43	
N	.125 / 3.18	
O	.050 / 1.27	
P	.405 / 10.29	
Q	.170 / 4.32	
R	.062 / 1.58	

ORDER CODE: ASI10546
CHARACTERISTICS $T_C = 25$ °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 10$ mA	55			V
BV_{CER}	$I_C = 20$ mA $R_{BE} = 10$ Ω	55			V
BV_{EBO}	$I_E = 1.0$ mA	3.5			V
I_{CES}	$V_{CE} = 35$ V			5.0	mA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	15		150	---
P_G	$V_{CC} = 50$ V $P_{OUT} = 30$ W $f = 960 - 1215$ MHz	7.8			dB
η_C		40			%



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.