


**CMKT2207**  
**ULTRAmi™**  
**SURFACE MOUNT**  
**COMPLEMENTARY TRANSISTORS**

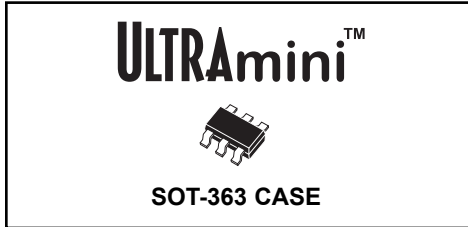

# Central™

**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMKT2207 type is a dual complementary silicon transistor manufactured by the epitaxial planar process, epoxy molded in a ULTRAmi™ surface mount package, designed for small signal general purpose and switching applications.

**Marking Code is K70.**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )


	<u>SYMBOL</u>	<u>NPN (Q1)</u>	<u>PNP (Q2)</u>	<u>UNITS</u>
Collector-Base Voltage	$V_{CB0}$	75	60	V
Collector-Emitter Voltage	$V_{CEO}$	40	60	V
Emitter-Base Voltage	$V_{EBO}$	6.0	5.0	V
Collector Current	$I_C$		600	mA
Power Dissipation	$P_D$		350	mW
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-65 to +150		$^\circ\text{C}$
Thermal Resistance	$\Theta_{JA}$	357		$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS PER TRANSISTOR:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>NPN (Q1)</u>		<u>PNP (Q2)</u>		<u>UNITS</u>
		<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	
$I_{CBO}$	$V_{CB}=60\text{V}$	-	10	-	-	nA
$I_{CBO}$	$V_{CB}=50\text{V}$	-	-	-	10	nA
$I_{CBO}$	$V_{CB}=60\text{V}, T_A=125^\circ\text{C}$	-	10	-	-	nA
$I_{CBO}$	$V_{CB}=50\text{V}, T_A=125^\circ\text{C}$	-	-	-	10	nA
$I_{EBO}$	$V_{EB}=3.0\text{V}$	-	10	-	-	nA
$I_{CEV}$	$V_{CE}=60\text{V}, V_{EB(OFF)}=3.0\text{V}$	-	10	-	-	nA
$I_{CEV}$	$V_{CE}=30\text{V}, V_{EB(OFF)}=500\text{mV}$	-	-	-	50	nA
$BV_{CBO}$	$I_C=10\mu\text{A}$	75	-	60	-	V
$BV_{CEO}$	$I_C=10\text{mA}$	40	-	60	-	V
$BV_{EBO}$	$I_E=10\mu\text{A}$	6.0	-	5.0	-	V
$V_{CE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	-	0.3	-	0.4	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	1.0	-	1.6	V
$V_{BE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	0.6	1.2	-	1.3	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	2.0	-	2.6	V
$h_{FE}$	$V_{CE}=10\text{V}, I_C=0.1\text{mA}$	35	-	75	-	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$	50	-	100	-	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=10\text{mA}$	75	-	100	-	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=150\text{mA}$	100	300	100	300	
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=150\text{mA}$	50	-	-	-	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=500\text{mA}$	40	-	50	-	

SYMBOL	TEST CONDITIONS	NPN (Q1)		PNP (Q2)		UNITS
		MIN	MAX	MIN	MAX	
$f_T$	$V_{CE}=20V, I_C=20mA, f=100MHz$	300	-	-	-	MHz
$f_T$	$V_{CE}=20V, I_C=50mA, f=100MHz$	-	-	200	-	MHz
$C_{ob}$	$V_{CB}=10V, I_E=0, f=1.0MHz$	-	8.0	-	8.0	pF
$C_{ib}$	$V_{EB}=0.5V, I_C=0, f=1.0MHz$	-	25	-	-	pF
$C_{ib}$	$V_{EB}=2.0V, I_C=0, f=1.0MHz$	-	-	-	30	pF
$h_{ie}$	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	2.0	8.0	-	-	k $\Omega$
$h_{ie}$	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	0.25	1.25	-	-	k $\Omega$
$h_{re}$	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	-	8.0	-	-	x10-4
$h_{re}$	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	-	4.0	-	-	x10-4
$h_{fe}$	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	50	300	-	-	
$h_{fe}$	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	75	375	-	-	
$h_{oe}$	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	5.0	35	-	-	$\mu$ mhos
$h_{oe}$	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	25	200	-	-	$\mu$ mhos
$rb'C_c$	$V_{CB}=10V, I_E=20mA, f=31.8MHz$	-	150	-	-	ps
NF	$V_{CE}=10V, I_C=100\mu A, R_S=1.0k\Omega, f=1.0kHz$	-	4.0	-	-	dB
$t_{on}$	$V_{CC}=30V, V_{BE}=0.5V, I_C=150mA, I_{B1}=15mA$	-	-	-	45	ns
$t_d$	$V_{CC}=30V, V_{BE}=0.5V, I_C=150mA, I_{B1}=15mA$	-	10	-	10	ns
$t_r$	$V_{CC}=30V, V_{BE}=0.5V, I_C=150mA, I_{B1}=15mA$	-	25	-	40	ns
$t_{off}$	$V_{CC}=6.0V, I_C=150mA, I_{B1}=I_{B2}=15mA$	-	-	-	100	ns
$t_s$	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$	-	225	-	-	ns
$t_s$	$V_{CC}=6.0V, I_C=150mA, I_{B1}=I_{B2}=15mA$	-	-	-	80	ns
$t_f$	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$	-	60	-	-	ns
$t_f$	$V_{CC}=6.0V, I_C=150mA, I_{B1}=I_{B2}=15mA$	-	-	-	30	ns

### SOT-363 CASE - MECHANICAL OUTLINE

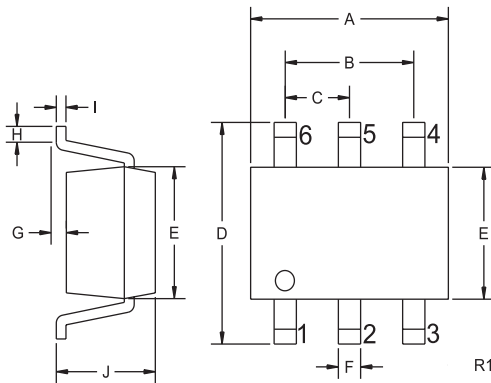

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.073	0.085	1.85	2.15
B	0.051		1.30	
C	0.026			
D	0.075	0.091	1.90	2.30
E	0.043	0.055	1.10	1.40
F	0.006	0.012	0.15	0.30
G	0.000	0.004	0.00	0.10
H	0.010	-	0.25	-
I	0.004	0.010	0.10	0.25
J	0.031	0.039	0.80	1.00

SOT-363 (REV: R1)

#### LEAD CODE:

- |                 |          |
|-----------------|----------|
| 1) Emitter Q1   | Q1 = NPN |
| 2) Base Q1      | Q2 = PNP |
| 3) Collector Q2 |          |
| 4) Emitter Q2   |          |
| 5) Base Q2      |          |
| 6) Collector Q1 |          |

R0 ( 9-October 2001)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.