


Silicon Schottky Diodes

- For low-loss, fast-recovery, meter protection, bias isolation and clamping applications
- Integrated diffused guard ring
- Low forward voltage




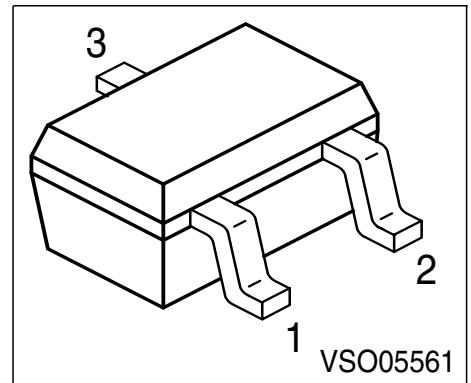


BAS 125W

BAS 125-04W

BAS 125-05W

BAS 125-06W



ESD: Electrostatic discharge sensitive device, observe handling precaution!

Type	Marking	Pin Configuration			Package
BAS 125W	13s	1 = A	2 n.c.	3 = C	SOT-323
BAS 125-04W	14s	1 = A1	2 = C2	3 = C1/A2	SOT-323
BAS 125-05W	15s	1 = A1	2 = A2	3 = C1/2	SOT-323
BAS 125-06W	16s	1 = C1	2 = C2	3 = A1/2	SOT-323

Maximum Ratings

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	25	V
Forward current	I_F	100	mA
Surge forward current ($t < 100\mu s$)	I_{FSM}	500	
Total power dissipation BAS 125W, $T_S = 93\text{ }^\circ\text{C}$	P_{tot}	250	mW
BAS 125-04W, -05W, -06W, $T_S = 84\text{ }^\circ\text{C}$	P_{tot}	250	
Junction temperature	T_j	150	$^\circ\text{C}$
Operating temperature range	T_{op}	-55 ... 150	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Junction - ambient	Symbol	Value	Unit
¹⁾ BAS 125W	R_{thJA}	≤ 310	K/W
¹⁾ BAS 125-04W ...	R_{thJA}	≤ 425	
Junction - soldering point BAS 125W	R_{thJS}	≤ 230	
Junction - soldering point BAS 125-04W ...	R_{thJS}	≤ 265	

1) Package mounted on epoxy pcb 40mm x 40mm x 1.5mm / 0.5cm² Cu


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Reverse current $V_R = 20\text{ V}$ $V_R = 25\text{ V}$	I_R	-	-	100 150	nA
Forward voltage $I_F = 1\text{ mA}$ $I_F = 10\text{ mA}$ $I_F = 35\text{ mA}$	V_F	-	385 530 800	400 650 950	mV
AC characteristics					
Diode capacitance $V_R = 0\text{ V}, f = 1\text{ MHz}$	C_T	-	-	1.1	pF
Differential forward resistance $I_F = 5\text{ mA}, f = 10\text{ kHz}$	R_f	-	16	-	Ω

Forward current $I_F = f(T_A^*; T_S)$


* Package mounted on epoxy

BAS 125W

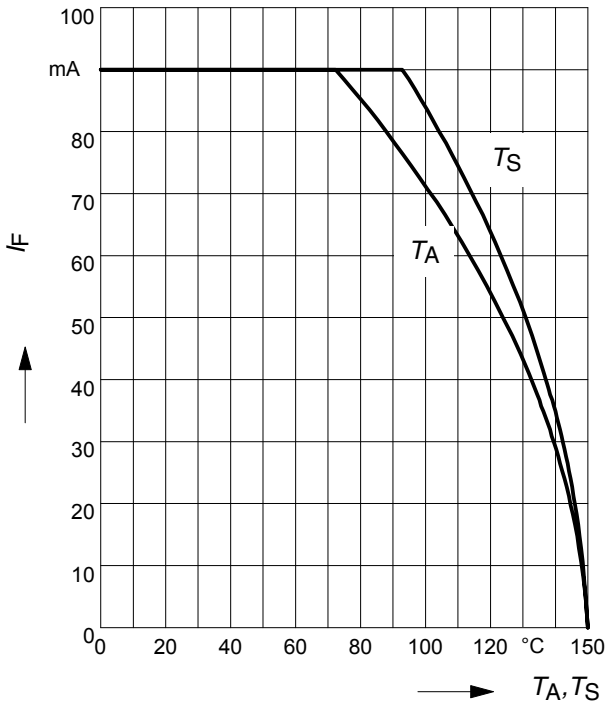

Permissible Pulse Load $R_{thJS} = f(t_p)$


BAS 125W

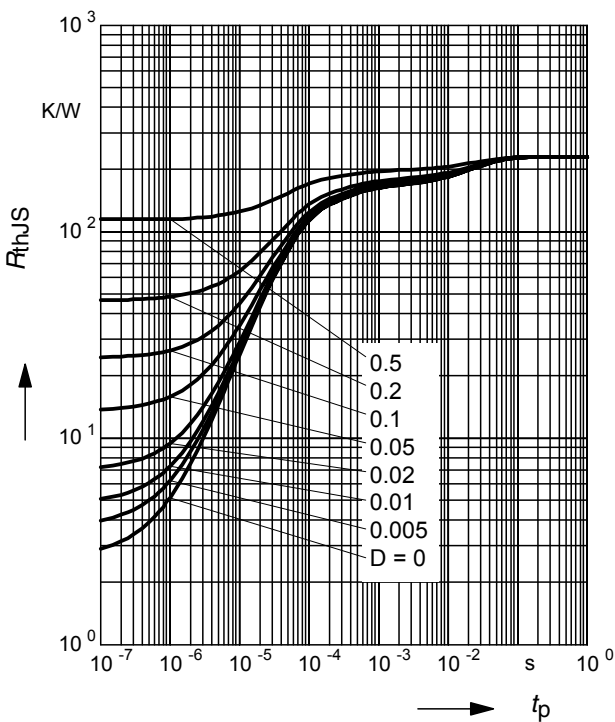

Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$


BAS 125W

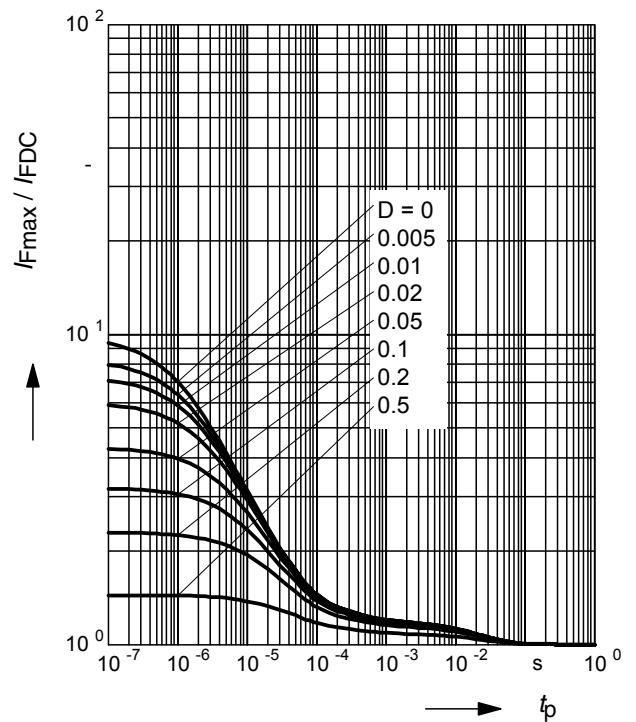

Forward current $I_F = f(T_A^*; T_S)$


* Package mounted on epoxy

BAS 125-04W ... (I_F per diode)

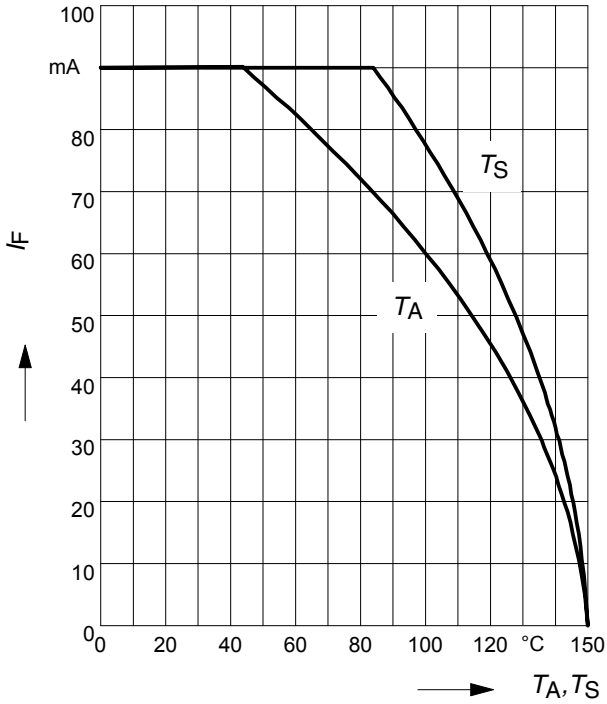

Permissible Pulse Load $R_{thJS} = f(t_p)$


BAS 125-04W ...

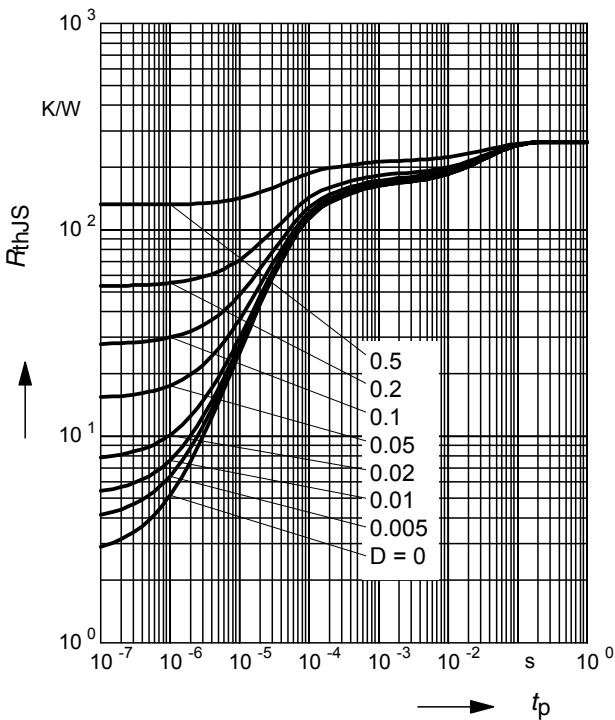

Permissible Pulse Load


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS 125-04W ...

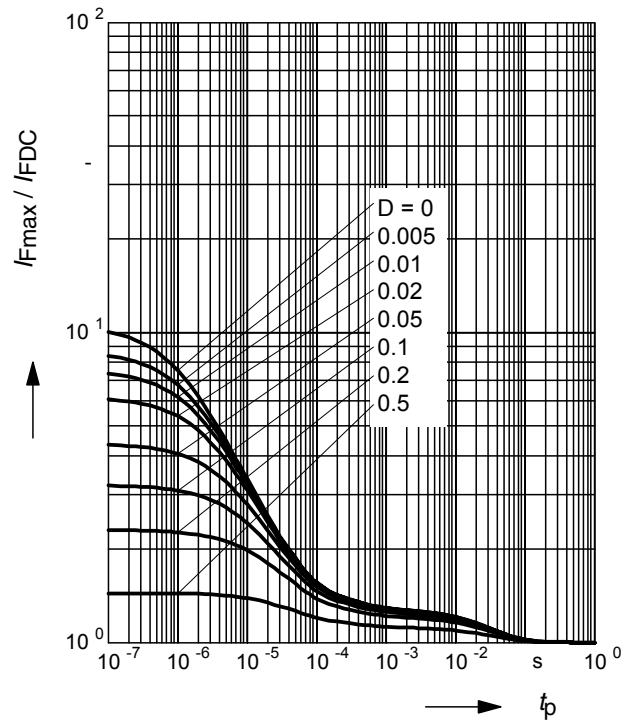


Forward current $I_F = f(V_F)$

$T_A =$ Parameter

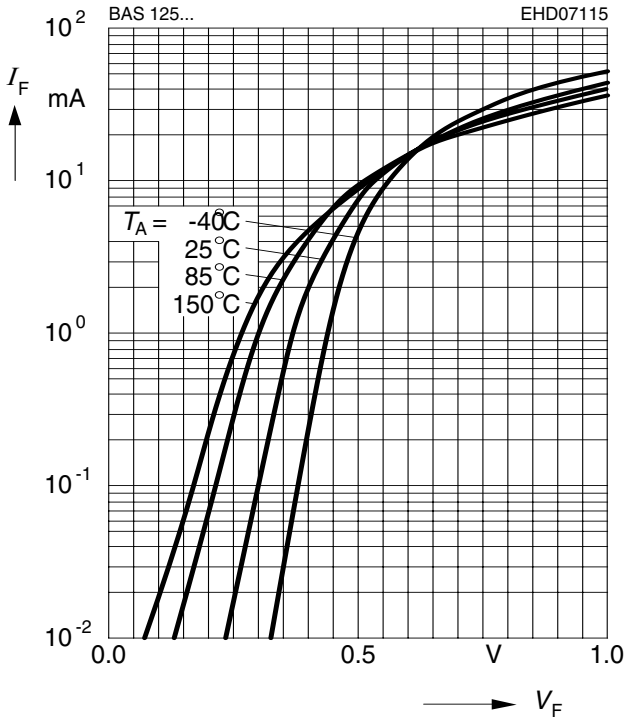


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

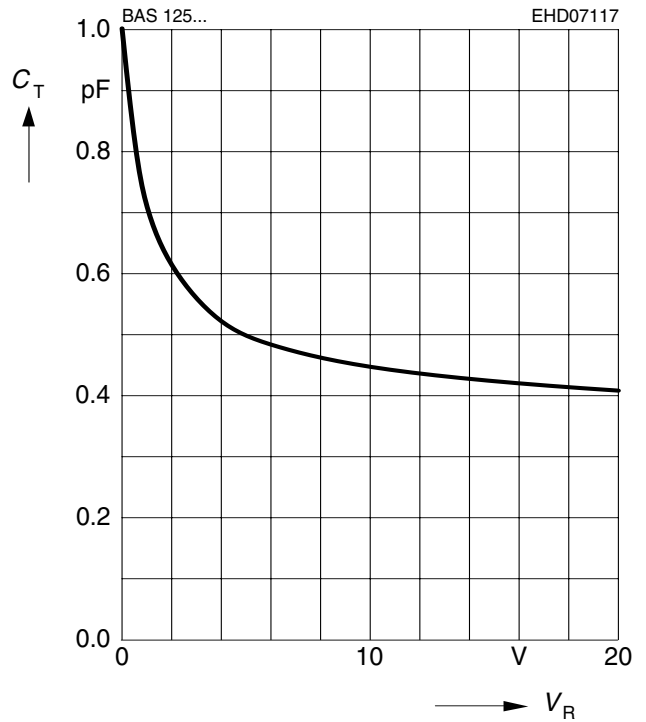


Reverse current $I_R = f(V_R)$

$T_A =$ Parameter

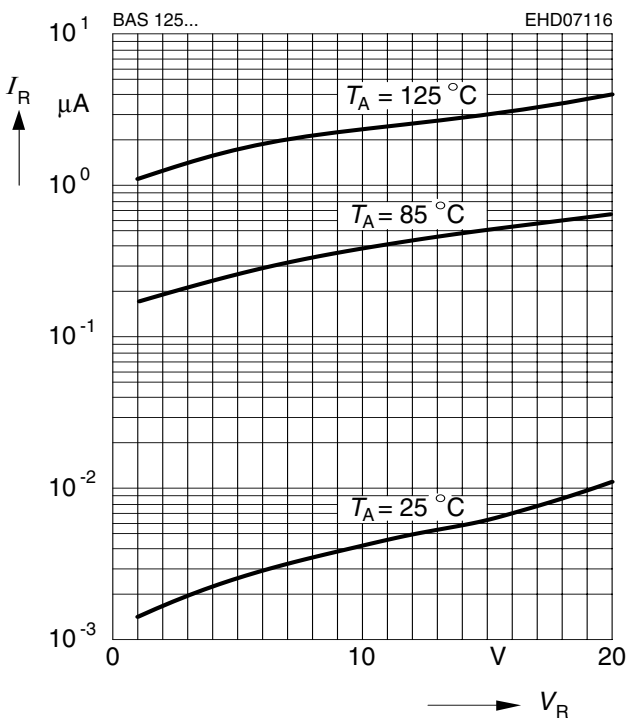

Differential forward resistance $r_f = f(I_F)$

$f = 10\text{kHz}$

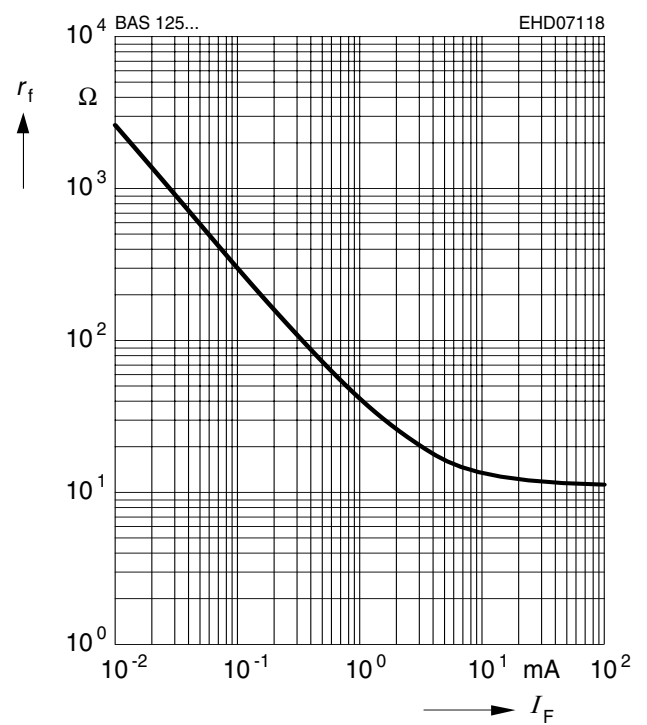



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.