

# Surface Mount Low Noise Silicon Bipolar Transistor Chip

## Technical Data

### AT-41411

#### Features

- **Low Noise Figure:**  
1.4 dB Typical at 1.0 GHz  
1.8 dB Typical at 2.0 GHz
- **High Associated Gain:**  
18.0 dB Typical at 1.0 GHz  
13.0 dB Typical at 2.0 GHz
- **High Gain-Bandwidth Product:** 7.0 GHz Typical  $f_T$
- **Low Cost Surface Mount Plastic Package**
- **Tape-and-Reel Packaging Option Available<sup>(1)</sup>**


#### Description

Hewlett-Packard's AT-41411 is a general purpose NPN bipolar transistor that offers excellent high frequency performance. The AT-41411 is housed in a low cost low parasitic 4 lead SOT-143 surface mount package. The SOT-143 is an industry standard and is compatible with high volume surface mount assembly techniques. The 4 micron emitter-


to-emitter pitch enables this transistor to be used in many different functions. The 14 emitter finger interdigitated geometry yields an intermediate sized transistor with impedances that are easy to match for low noise and moderate power applications. This device is designed for use in low noise, wideband amplifier, mixer and oscillator applications in the VHF, UHF, and microwave frequencies. An optimum noise match near  $50 \Omega$  in the 1 to 2 GHz frequency range, makes this device easy to use as a low noise amplifier.

The AT-41411 bipolar transistor is fabricated using Hewlett-Packard's 10 GHz  $f_T$  Self-Aligned-Transistor (SAT) process. The die is nitride passivated for surface protection. Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metalization in the fabrication of this device.

#### SOT-143 Plastic



#### Pin Connections



#### Note:

1. Refer to "Tape-and-Reel Packaging for Semiconductor Devices".

## AT-41411 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum <sup>[1]</sup>
V <sub>EBO</sub>	Emitter-Base Voltage	V	1.5
V <sub>CBO</sub>	Collector-Base Voltage	V	20
V <sub>CEO</sub>	Collector-Emitter Voltage	V	12
I <sub>C</sub>	Collector Current	mA	50
P <sub>T</sub>	Power Dissipation <sup>[2,3]</sup>	mW	225
T <sub>j</sub>	Junction Temperature	°C	150
T <sub>STG</sub>	Storage Temperature	°C	-65 to 150

### Thermal Resistance<sup>[2,4]</sup>:

$$\theta_{jc} = 550^{\circ}\text{C}/\text{W}$$

#### Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T<sub>CASE</sub> = 25°C.
3. Derate at 1.8 mW/°C for T<sub>C</sub> > 26°C.
4. See MEASUREMENTS section “Thermal Resistance” for more information.

## Part Number Ordering Information

Part Number	Increment	Comments
AT-41411-TR1	3000	Reel
AT-41411-BLK	100	Bulk

**Note:** For more information, see “Tape and Reel Packaging for Semiconductor Devices”.


## Electrical Specifications, T<sub>A</sub> = 25°C

Symbol	Parameters and Test Conditions <sup>[1]</sup>	Units	Min.	Typ.	Max.
S <sub>21E</sub>   <sup>2</sup>	Insertion Power Gain; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA f = 1.0 GHz f = 2.0 GHz	dB	14.5	16.5 11.0	
P <sub>1 dB</sub>	Power Output @ 1 dB Gain Compression V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA f = 2.0 GHz	dBm		17.0	
G <sub>1 dB</sub>	1 dB Compressed Gain; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA f = 2.0 GHz	dB		13.0	
NF <sub>O</sub>	Optimum Noise Figure; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz	dB		1.4 1.8 3.5	
G <sub>A</sub>	Gain @ NF <sub>O</sub> ; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz	dB		18.0 13.0 9.0	
f <sub>T</sub>	Gain Bandwidth Product; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 20 mA	GHz		7.0	
h <sub>FE</sub>	Forward Current Transfer Ratio; V <sub>CE</sub> = 8 V, I <sub>C</sub> = 10 mA	—	30	150	270
I <sub>CBO</sub>	Collector Cutoff Current; V <sub>CB</sub> = 8 V	μA			0.2
I <sub>EBO</sub>	Emitter Cutoff Current; V <sub>EB</sub> = 1 V	μA			1.0


#### Notes:

1. Refer to PACKAGING Section, “Tape-and-Reel Packaging for Semiconductor Devices.”


**AT-41411 Typical Performance,  $T_A = 25^\circ\text{C}$**

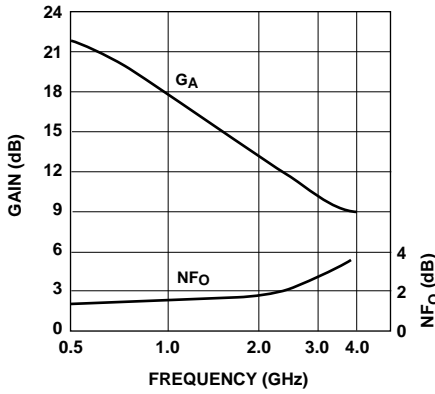


**Figure 1. Noise Figure and Associated Gain vs. Frequency.  $V_{CE} = 8\text{ V}$ ,  $I_C = 10\text{ mA}$ .**

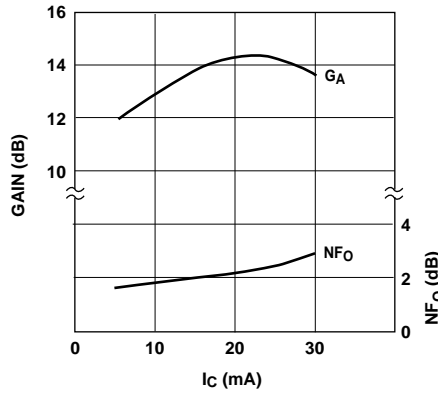

**Figure 2. Optimum Noise Figure and Associated Gain vs. Collector Current and Frequency.  $V_{CE} = 8\text{ V}$ ,  $f = 2.0\text{ GHz}$ .**

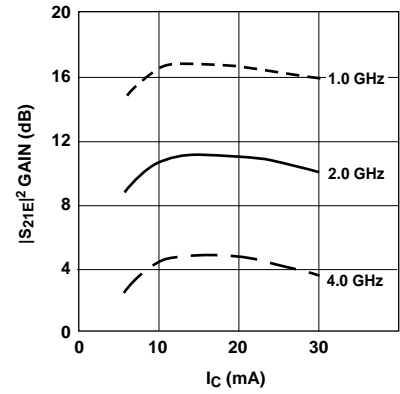

**Figure 3. Insertion Power Gain vs. Collector Current and Frequency.  $V_{CE} = 8\text{ V}$ .**

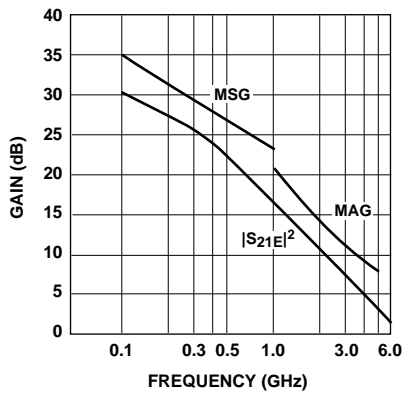

**Figure 4. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency.  $V_{CE} = 8\text{ V}$ ,  $I_C = 20\text{ mA}$ .**

### AT-41411 Typical Scattering Parameters,

Common Emitter,  $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{CE} = 8\text{V}$ ,  $I_C = 10\text{mA}$

Freq. GHz	$S_{11}$		dB	$S_{21}$		dB	$S_{12}$		$S_{22}$	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
0.1	.85	-30	27.3	23.20	158	-37.7	.013	64	.93	-11
0.5	.58	-112	21.7	12.18	109	-29.1	.035	44	.62	-30
1.0	.49	-156	16.5	6.70	85	-27.2	.044	43	.50	-33
1.5	.49	178	13.2	4.58	71	-25.0	.056	47	.46	-36
2.0	.50	160	10.8	3.45	59	-23.4	.068	47	.45	-41
2.5	.53	153	9.0	2.82	53	-22.5	.075	56	.43	-43
3.0	.55	142	7.5	2.37	43	-21.0	.089	54	.43	-53
3.5	.56	133	6.1	2.02	33	-19.8	.102	52	.44	-63
4.0	.56	121	4.9	1.76	23	-18.8	.115	49	.46	-73

### AT-41411 Typical Scattering Parameters,

Common Emitter,  $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{CE} = 8\text{V}$ ,  $I_C = 20\text{mA}$


Freq. GHz	$S_{11}$		dB	$S_{21}$		dB	$S_{12}$		$S_{22}$	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
0.1	.65	-46	30.4	33.07	150	-40.0	.010	59	.89	-15
0.5	.46	-137	22.4	13.21	100	-32.0	.025	56	.57	-26
1.0	.43	-175	16.7	6.85	80	-28.4	.038	58	.52	-29
1.5	.44	163	13.3	4.63	67	-26.4	.048	61	.51	-32
2.0	.47	148	10.8	3.47	56	-24.2	.062	61	.50	-37
2.5	.50	140	9.0	2.82	50	-22.9	.071	60	.47	-39
3.0	.53	132	7.5	2.36	40	-20.7	.092	61	.46	-48
3.5	.55	122	6.1	2.02	30	-19.6	.105	57	.45	-60
4.0	.56	112	4.8	1.74	19	-18.3	.122	53	.45	-73

A model for this device is available in the DEVICE MODELS section.

### AT-41411 Noise Parameters: $V_{CE} = 8\text{V}$ , $I_C = 10\text{mA}$

Freq. GHz	$N_{F_0}$ dB	$\Gamma_{opt}$		$R_N/50$
		Mag	Ang	
0.1	1.3	.12	4	0.17
0.5	1.3	.10	23	0.17
1.0	1.4	.07	57	0.16
2.0	1.8	.09	-158	0.16
4.0	3.5	.31	-87	0.38

# SOT-143 Plastic Dimensions

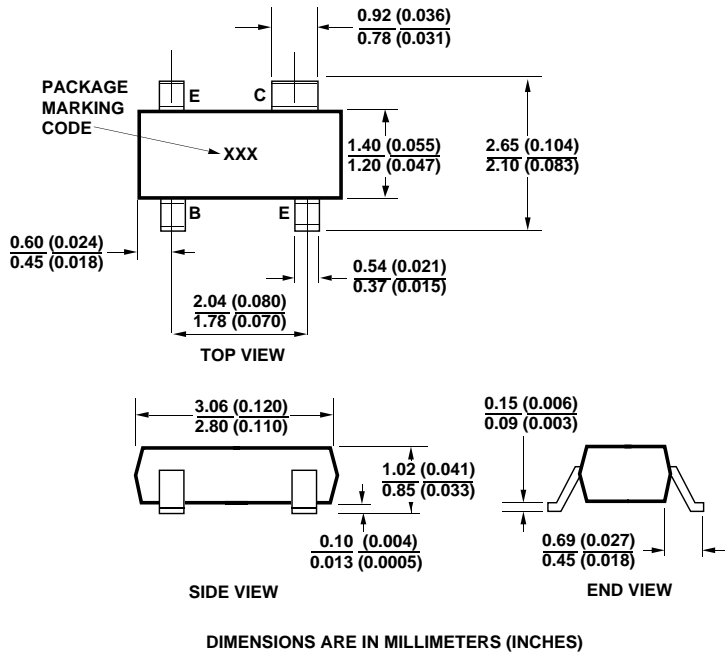



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.