

# 1SMB5926 THRU 1SMB5956

## SURFACE MOUNT SILICON ZENER DIODE


### VOLTAGE - 11 TO 200 Volts Power - 1.5 Watts

#### FEATURES

- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Typical  $I_R$  less than 1 A above 11V
- High temperature soldering :  
260 /10 seconds at terminals
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O

#### DO-214AA

#### MODIFIED J-BEND

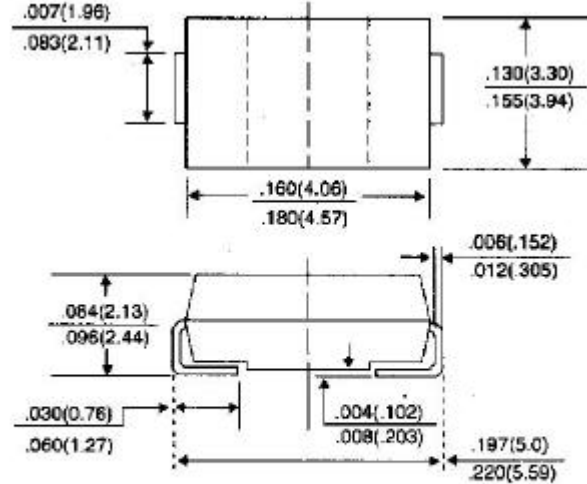

Dimensions in inches and (millimeters)

#### MECHANICAL DATA

Case: JEDEC DO-214AA Molded plastic over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, method 2026

Polarity: Color band denotes positive end (cathode)

Standard Packaging: 12mm tape (EIA-481)

Weight: 0.003 ounce, 0.093 gram

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNITS
DC Power Dissipation @ $T_L=75^\circ\text{C}$ , Measure at Zero Lead Length(Note 1, Fig. 1) Derate above 75	$P_D$	1.5 15	Watts mW/
Peak forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC Method) (Note 1,2)	$I_{FSM}$	10	Amps
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	

#### NOTES:

1. Mounted on  $5.0\text{mm}^2$  (.013mm thick) land areas.
2. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.
3. ZENER VOLTAGE ( $V_Z$ ) MEASUREMENT Nominal zener voltage is measured with the device function in thermal equilibrium with ambient temperature at 25 °C.
4. ZENER IMPEDANCE ( $Z_Z$ ) DERIVATION  $Z_{ZT}$  and  $Z_{ZK}$  are measured by dividing the ac voltage drop across the device by the ac current applied. The specified limits are for  $I_{Z(ac)} = 0.1 I_Z$ , (dc) with the ac frequency = 60Hz.

**1SMB5926 THRU 1SMB5956**

ELECTRICAL CHARACTERISTICS (T<sub>L</sub>=30 unless otherwise noted) (V<sub>F</sub>=1.5Volts Max @ I<sub>F</sub>=200mAdc for all types.)

Device	Nominal Zener Voltage V <sub>Z</sub> @ I <sub>ZT</sub> volts (Note 1.)	Test current I <sub>ZT</sub> mA	Maximum Zener Impedance (Note 2.)			Max reverse Leakage Current			Maximum DC Zener Current I <sub>ZM</sub> mAdc	Device Marking Code
			Z <sub>ZT</sub> @ I <sub>ZT</sub> Ohms	Z <sub>ZK</sub> @ I <sub>ZK</sub> Ohms	I <sub>ZK</sub> mA	I <sub>R</sub> A	V <sub>R</sub> Volts			
1SMB5926	11	34.1	5.5	550	0.25	1	8.4	136	926B	
1SMB5927	12	31.2	6.5	550	0.25	1	9.1	125	927B	
1SMB5928	13	28.8	7	550	0.25	1	9.9	115	928B	
1SMB5929	15	25	9	600	0.25	1	11.4	100	929B	
1SMB5930	16	23.4	10	600	0.25	1	12.2	93	930B	
1SMB5931	18	20.8	12	650	0.25	1	13.7	83	931B	
1SMB5932	20	18.7	14	650	0.25	1	15.2	75	932B	
1SMB5933	22	17	17.5	650	0.25	1	16.7	68	933B	
1SMB5934	24	15.6	19	700	0.25	1	18.2	62	934B	
1SMB5935	27	13.9	23	700	0.25	1	20.6	55	935B	
1SMB5936	30	12.5	26	750	0.25	1	22.8	50	936B	
1SMB5937	33	11.4	33	800	0.25	1	25.1	45	937B	
1SMB5938	36	10.4	38	850	0.25	1	27.4	41	938B	
1SMB5939	39	9.6	45	900	0.25	1	29.7	38	939B	
1SMB5940	43	8.7	53	950	0.25	1	32.7	34	940B	
1SMB5941	47	8	67	1000	0.25	1	35.8	31	941B	
1SMB5942	51	7.3	70	1100	0.25	1	38.8	29	942B	
1SMB5943	56	6.7	86	1300	0.25	1	42.6	26	943B	
1SMB5944	62	6	100	1500	0.25	1	47.1	24	944B	
1SMB5945	68	5.5	120	1700	0.25	1	51.7	22	945B	
1SMB5946	75	5	140	2000	0.25	1	56	20	946B	
1SMB5947	82	4.6	160	2500	0.25	1	62.2	18	947B	
1SMB5948	91	4.1	200	3000	0.25	1	69.2	16	948B	
1SMB5949	100	3.7	250	3100	0.25	1	76	15	949B	
1SMB5950	110	3.4	300	4000	0.25	1	83.6	13	950B	
1SMB5951	120	3.1	380	4500	0.25	1	91.2	12	951B	
1SMB5952	130	2.9	450	5000	0.25	1	98.8	11	952B	
1SMB5953	150	2.5	600	6000	0.25	1	114	10	953B	
1SMB5954	160	2.3	700	6500	0.25	1	121.6	9	954B	
1SMB5955	180	2.1	900	7000	0.25	1	136.8	8	955B	
1SMB5956	200	1.9	1200	8000	0.25	1	152	7	956B	

\* TOLERANCE AND VOLTAGE DESIGNATION Tolerance designation - The type numbers listed indicate a tolerance of ±5%

**RATING AND CHARACTERISTICS CURVES**

**1SMB5926 THRU 1SMB5956**

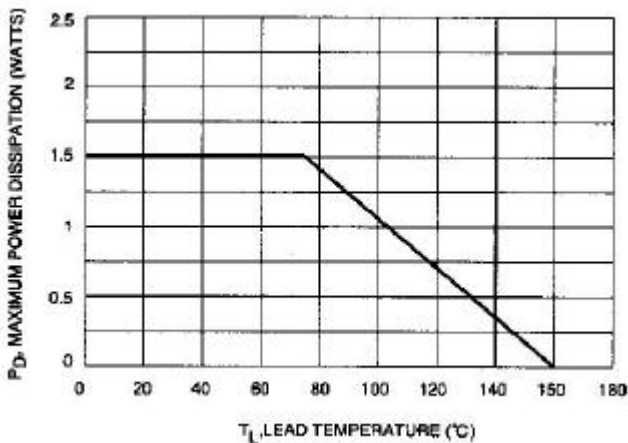


Fig. 1-STEADY STATE POWER DERATING

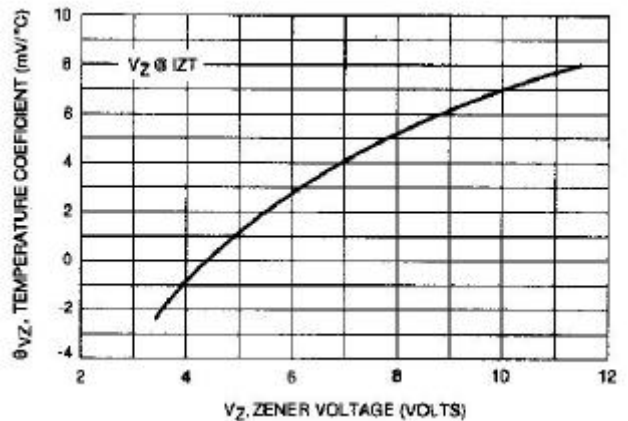


Fig. 2-ZENER VOLTAGE TO 12 VOLTS

# RATING AND CHARACTERISTICS CURVES

1SMB5926 THRU 1SMB5956

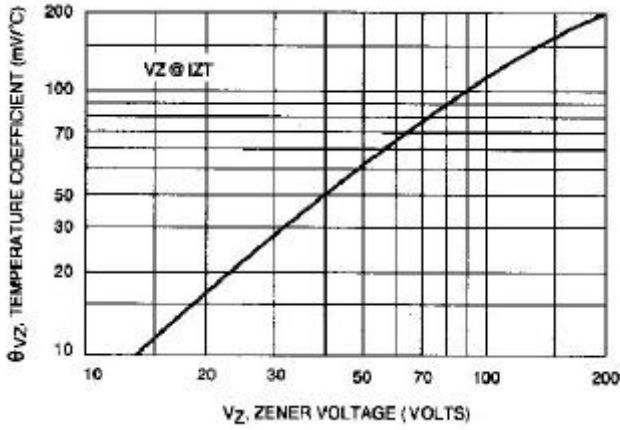


Fig. 3-ZENER VOLTAGE 14 TO 200 VOLTS

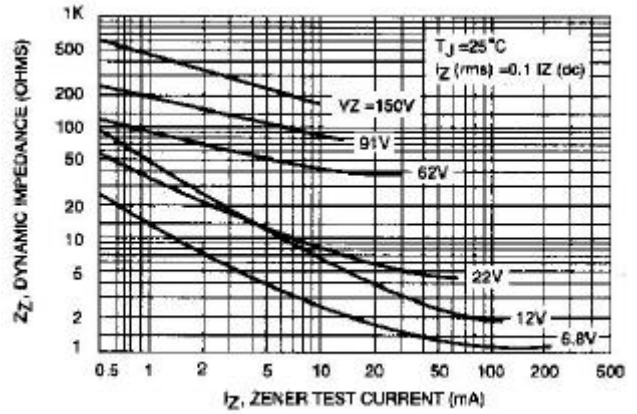


Fig. 4-EFFECT OF ZENER CURRENT

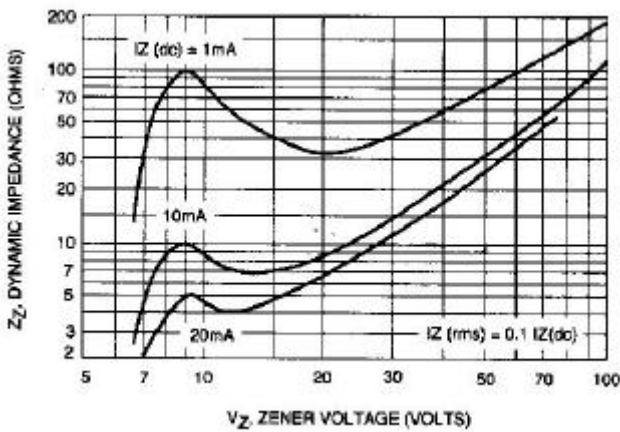


Fig. 5-EFFECT OF ZENER VOLTAGE

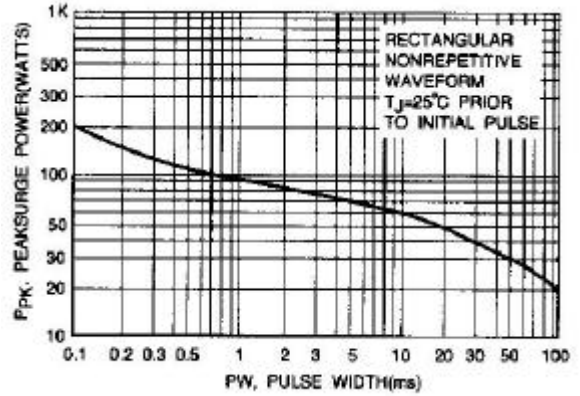


Fig. 6-MAXIMUM SURGE POWER

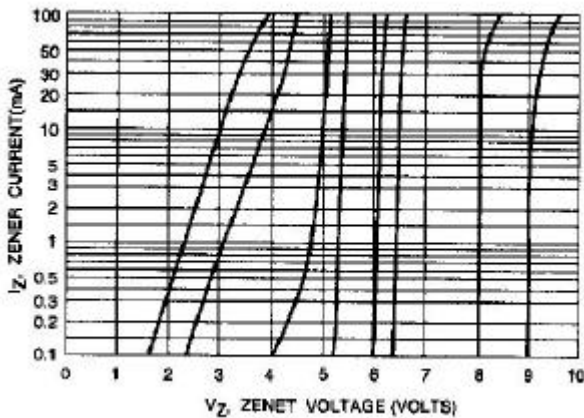


Fig. 7- $V_Z = 6.8$  THRU 10 VOLTS

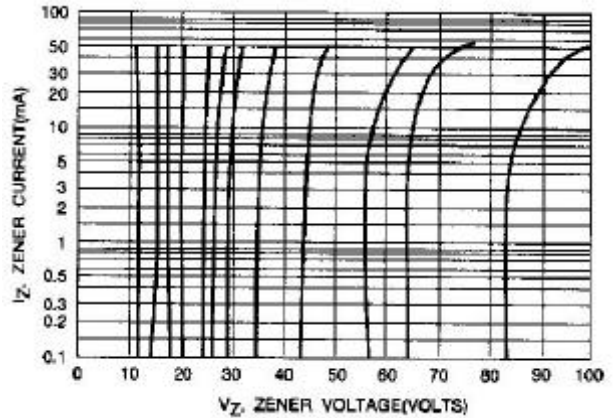


Fig. 8-  $V_Z = 12$  THRU 82 VOLTS

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.