



Silicon Tuning Diodes

- Excellent linearity
- High Q hyperabrupt tuning diode
- Low series resistance
- Designed for low tuning voltage operation for VCO's in mobile communications equipment
- Very low capacitance spread

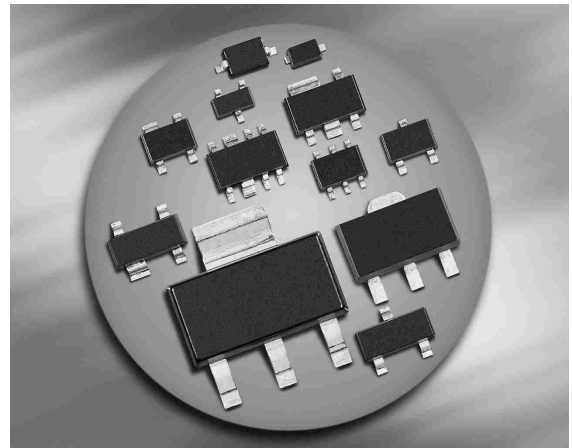

BBY55-02V
BBY55-02W
BBY55-03W



Type	Package	Configuration	L_S (nH)	Marking
BBY55-02V	SC79	single	0.6	7
BBY55-02W	SCD80	single	0.6	77
BBY55-03W	SOD323	single	1.8	7 white

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	16	V
Forward current	I_F	20	mA
Operating temperature range	T_{op}	-55 ... 150	°C
Storage temperature	T_{stg}	-55 ... 150	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current $V_R = 15\text{ V}$ $V_R = 15\text{ V}, T_A = 85^\circ\text{C}$	I_R	- -	- -	3 100	nA
AC Characteristics					
Diode capacitance $V_R = 1\text{ V}, f = 1\text{ MHz}$ $V_R = 2\text{ V}, f = 1\text{ MHz}$ $V_R = 3\text{ V}, f = 1\text{ MHz}$ $V_R = 4\text{ V}, f = 1\text{ MHz}$ $V_R = 10\text{ V}, f = 1\text{ MHz}$	C_T	17.5 14 11.6 10 5.5	18.6 15 12.6 11 6	19.6 16 13.6 12 6.5	pF
Capacitance ratio $V_R = 2\text{ V}, V_R = 10\text{ V}, f = 1\text{ MHz}$	C_{T2}/C_{T10}	2	2.5	3	
Series resistance $V_R = 5\text{ V}, f = 470\text{ MHz}$	r_S	-	0.15	0.4	Ω


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

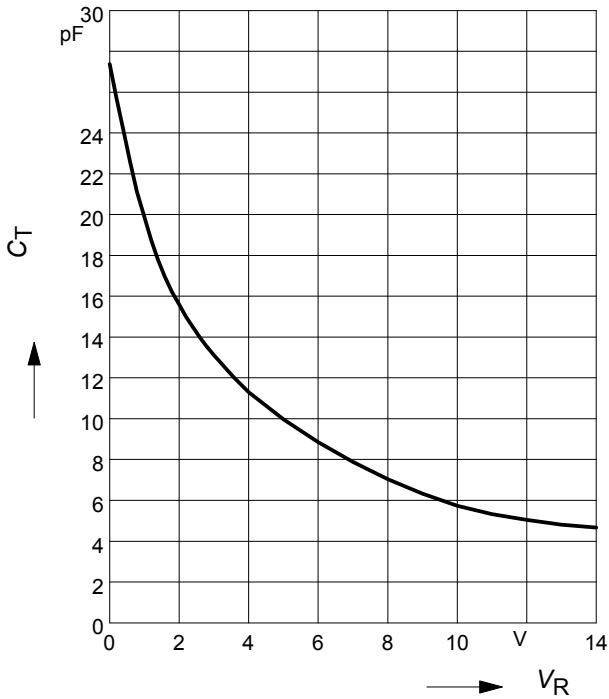


Capacitance change $\Delta C = f(T_A)$

$f = 1\text{MHz}$

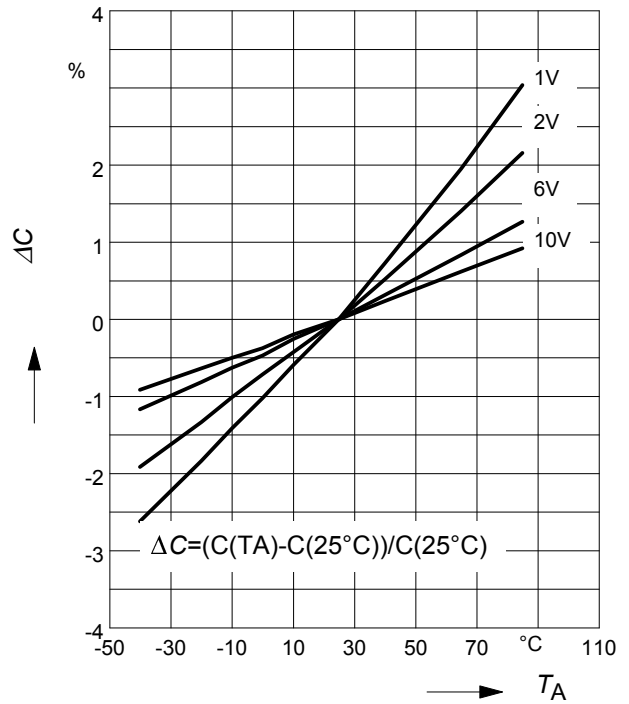


Series resistance $r_S = f(V_R)$

$f = 470\text{MHz}$

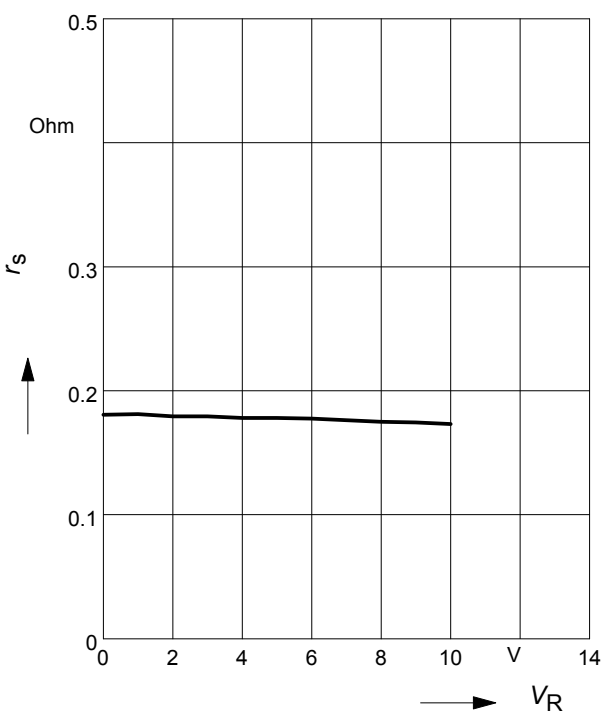

Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$

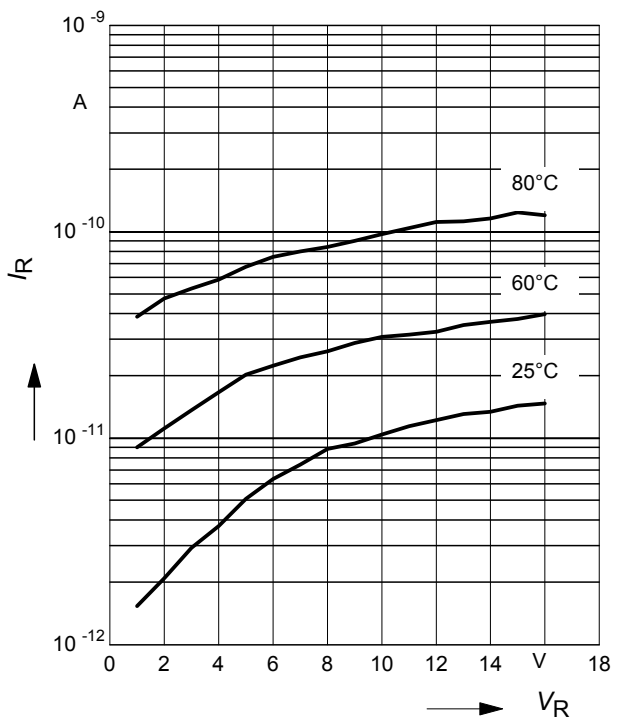



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.