

MITSUBISHI HVIGBT MODULES
CM1200HB-66H

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

HIGH POWER SWITCHING USE
 INSULATED TYPE

CM1200HB-66H




- IC 1200A
- VCES 3300V
- Insulated Type
- 1-element in a pack

APPLICATION

Inverters, Converters, DC choppers, Induction heating, DC to DC converters.

OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

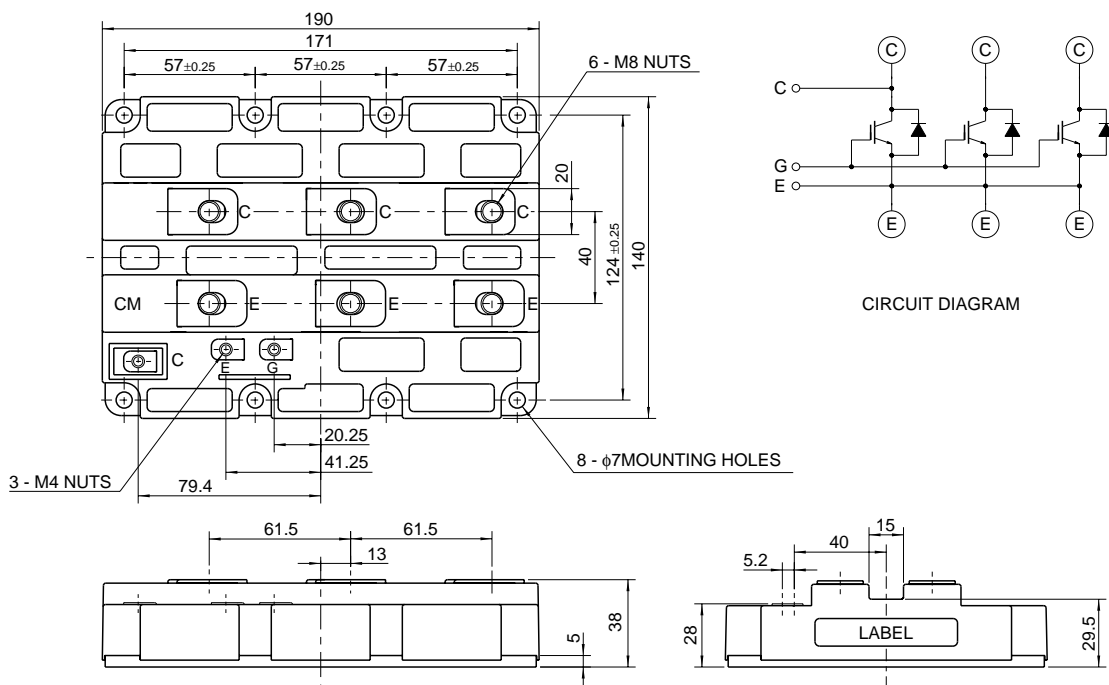

HVIGBT MODULES (High Voltage Insulated Gate Bipolar Transistor Modules)

Feb. 2000

CM1200HB-66H

**HIGH POWER SWITCHING USE
INSULATED TYPE**

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

MAXIMUM RATINGS (T_j = 25°C)

Symbol	Item	Conditions	Ratings	Unit
V _{CES}	Collector-emitter voltage	V _{GE} = 0V	3300	V
V _{GES}	Gate-emitter voltage	V _{CE} = 0V	±20	V
I _C	Collector current	T _C = 25°C	1200	A
I _{CM}		Pulse (Note 1)	2400	A
I _E (Note 2)	Emitter current	T _C = 25°C	1200	A
I _{EM} (Note 2)		Pulse (Note 1)	2400	A
P _C (Note 3)	Maximum collector dissipation	T _C = 25°C, IGBT part	15600	W
T _j	Junction temperature	—	-40 ~ +150	°C
T _{stg}	Storage temperature	—	-40 ~ +125	°C
V _{iso}	Isolation voltage	Charged part to base plate, rms, sinusoidal, AC 60Hz 1min.	6000	V
—	Mounting torque	Main terminals screw M8	6.67 ~ 13.00	N·m
		Mounting screw M6	2.84 ~ 6.00	N·m
		Auxiliary terminals screw M4	0.88 ~ 2.00	N·m
—	Mass	Typical value	2.2	kg

ELECTRICAL CHARACTERISTICS (T_j = 25°C)

Symbol	Item	Conditions	Limits			Unit	
			Min	Typ	Max		
I _{CES}	Collector cutoff current	V _{CE} = V _{CES} , V _{GE} = 0V	—	—	15	mA	
V _{GE(th)}	Gate-emitter threshold voltage	I _C = 120mA, V _{CE} = 10V	4.5	6.0	7.5	V	
I _{GES}	Gate-leakage current	V _{GE} = V _{GES} , V _{CE} = 0V	—	—	0.5	μA	
V _{CE(sat)}	Collector-emitter saturation voltage	T _j = 25°C	I _C = 1200A, V _{GE} = 15V (Note 4)	—	3.80	4.94	V
		T _j = 125°C		—	4.00	—	
C _{ies}	Input capacitance	V _{CE} = 10V V _{GE} = 0V	—	180	—	nF	
C _{oes}	Output capacitance		—	18.0	—	nF	
C _{res}	Reverse transfer capacitance		—	5.4	—	nF	
Q _G	Total gate charge	V _{CC} = 1650V, I _C = 1200A, V _{GE} = 15V	—	8.6	—	μC	
t _d (on)	Turn-on delay time	V _{CC} = 1650V, I _C = 1200A	—	—	1.60	μs	
t _r	Turn-on rise time	V _{GE1} = V _{GE2} = 15V	—	—	2.00	μs	
t _d (off)	Turn-off delay time	R _G = 1.6Ω	—	—	2.50	μs	
t _f	Turn-off fall time	Resistive load switching operation	—	—	1.00	μs	
V _{EC} (Note 2)	Emitter-collector voltage	I _E = 1200A, V _{GE} = 0V	—	2.80	3.64	V	
t _{rr} (Note 2)	Reverse recovery time	I _E = 1200A,	—	—	1.40	μs	
Q _{rr} (Note 2)	Reverse recovery charge	die / dt = -2400A / μs (Note 1)	—	400	—	μC	
R _{th(j-c)Q}	Thermal resistance	Junction to case, IGBT part	—	—	0.008	K/W	
R _{th(j-c)R}		Junction to case, FWDi part	—	—	0.016	K/W	
R _{th(c-f)}	Contact thermal resistance	Case to fin, conductive grease applied	—	0.006	—	K/W	

- Note 1. Pulse width and repetition rate should be such that the device junction temp. (T_j) does not exceed T_{jmax} rating.
 2. I_E, V_{EC}, t_{rr}, Q_{rr} & die/dt represent characteristics of the anti-parallel, emitter to collector free-wheel diode.
 3. Junction temperature (T_j) should not increase beyond 150°C.
 4. Pulse width and repetition rate should be such as to cause negligible temperature rise.




CM1200HB-66H

HIGH POWER SWITCHING USE
INSULATED TYPE

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules


PERFORMANCE CURVES

OUTPUT CHARACTERISTICS
(TYPICAL)

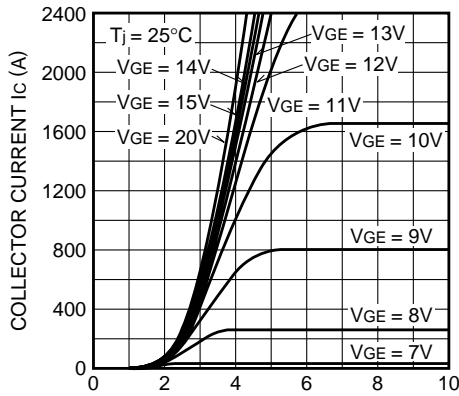


COLLECTOR-EMITTER SATURATION VOLTAGE $V_{ce(sat)}$ (V)

TRANSFER CHARACTERISTICS
(TYPICAL)

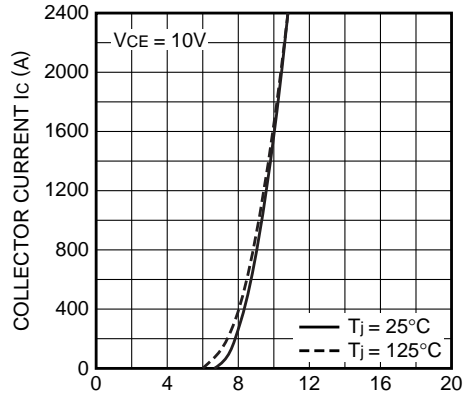


GATE-EMITTER VOLTAGE V_{GE} (V)

COLLECTOR-EMITTER SATURATION
VOLTAGE CHARACTERISTICS
(TYPICAL)

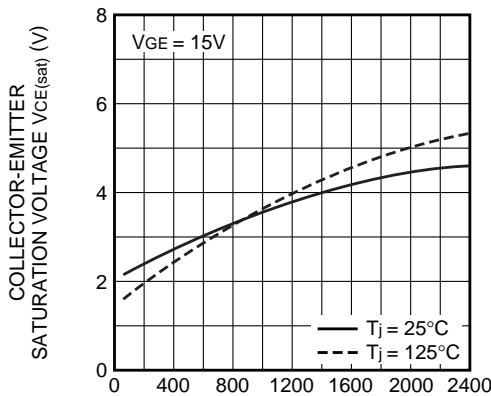


COLLECTOR CURRENT I_c (A)

COLLECTOR-EMITTER SATURATION
VOLTAGE CHARACTERISTICS
(TYPICAL)

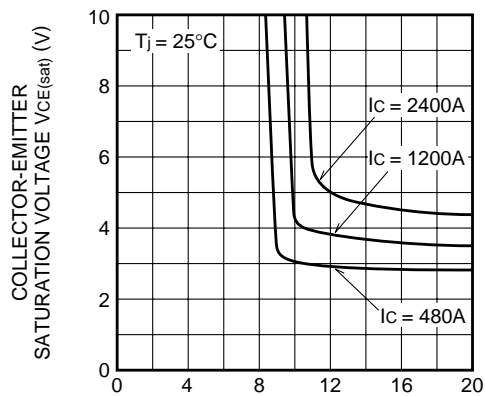


GATE-EMITTER VOLTAGE V_{GE} (V)

FREE-WHEEL DIODE
FORWARD CHARACTERISTICS
(TYPICAL)

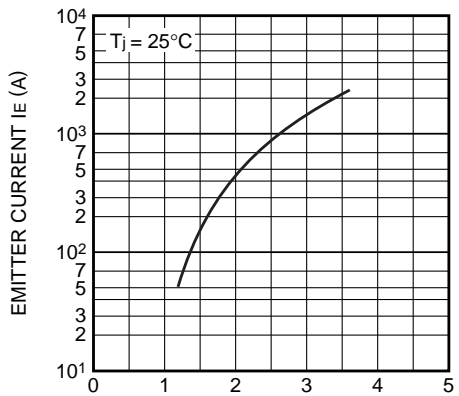

EMITTER-COLLECTOR VOLTAGE V_{EC} (V)

CAPACITANCE VS. V_{CE}
(TYPICAL)

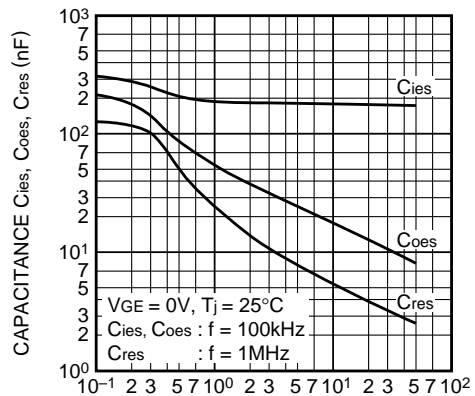


COLLECTOR-EMITTER VOLTAGE V_{CE} (V)

CM1200HB-66H


HIGH POWER SWITCHING USE
INSULATED TYPE

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules


**HALF-BRIDGE
SWITCHING CHARACTERISTICS
(TYPICAL)**

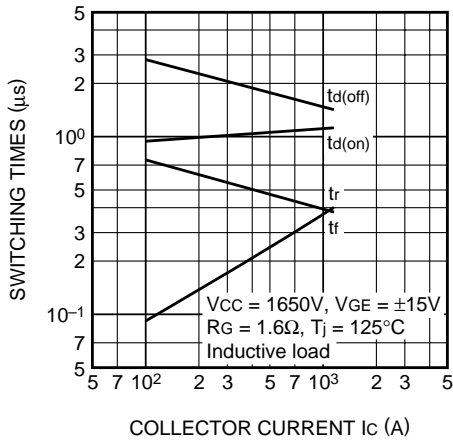


**REVERSE RECOVERY CHARACTERISTICS
OF FREE-WHEEL DIODE
(TYPICAL)**

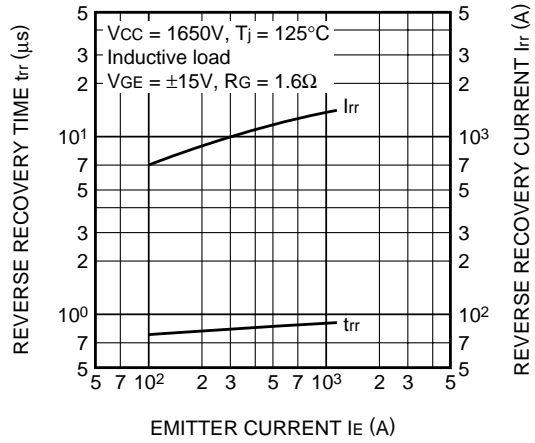


**TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(IGBT part)**

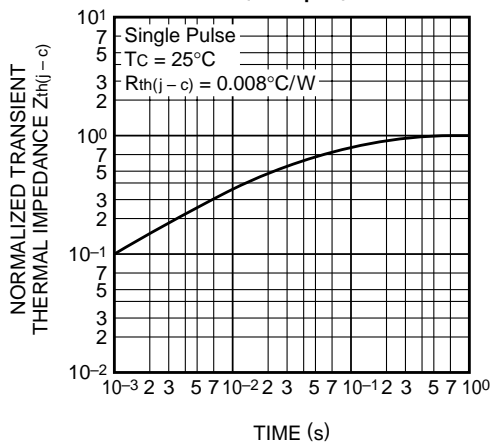

**TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(FWDi part)**

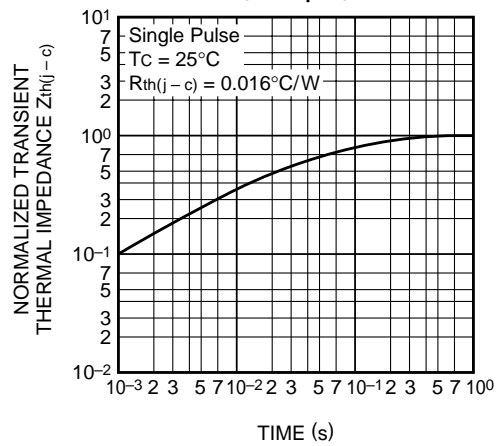

**VGE - GATE CHARGE
(TYPICAL)**

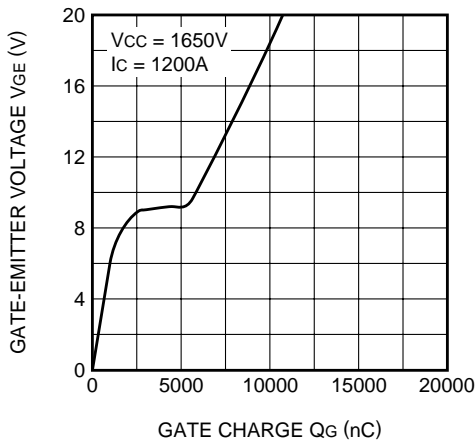



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.