



# SANYO SEMICONDUCTOR

| NPN    | PNP    |
|--------|--------|
| TIP140 | TIP145 |
| TIP141 | TIP146 |
| TIP142 | TIP147 |

## DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

60-80-100 VOLTS, 10 AMPERE

HIGH CURRENT GAIN  $h_{FE} = 4000$  typ. @ 3V, 5A  
LOW SATURATION VOLTAGE  $V_{CE(SAT)} = 1.0V$  typ. @ 5A  
MONOLITHIC CONSTRUCTION WITH BUILT-IN  
(1) BASE-EMITTER RESISTORS AND  
(2) COLLECTOR-EMITTER DIODE


### ABSOLUTE MAXIMUM RATINGS @ $T_a = 25^\circ C$

| RATING                                              | SYMBOL                            | TIP140,<br>TIP145 | TIP141,<br>TIP146 | TIP142,<br>TIP147 | UNIT            |
|-----------------------------------------------------|-----------------------------------|-------------------|-------------------|-------------------|-----------------|
| COLLECTOR-EMITTER VOLTAGE                           | V <sub>CEO</sub>                  | 60                | 80                | 100               | V <sub>dc</sub> |
| COLLECTOR-BASE VOLTAGE                              | V <sub>CB</sub>                   | 60                | 80                | 100               | V <sub>dc</sub> |
| EMITTER-BASE VOLTAGE                                | V <sub>EB</sub>                   | ← 5.0 →           |                   |                   | V <sub>dc</sub> |
| COLLECTOR CURRENT- CONTINUOUS<br>PEAK               | I <sub>C</sub>                    | ← 10 →            |                   |                   | A <sub>dc</sub> |
|                                                     |                                   | ← 15 →            |                   |                   |                 |
| TOTAL POWER DISSIPATION @ T <sub>C</sub> = 25 °C    | P <sub>D</sub>                    | ← 125 →           |                   |                   | W               |
| TOTAL POWER DISSIPATION @ T <sub>A</sub> = 25 °C    | P <sub>D</sub>                    | ← 3.5 →           |                   |                   | W               |
| OPERATING AND STORAGE JUNCTION<br>TEMPERATURE RANGE | T <sub>J</sub> , T <sub>stg</sub> | ← - 55 to + 150 → |                   |                   | °C              |

### OUTLINE DIMENSION

JEDEC: TO-3P


UNIT: MM

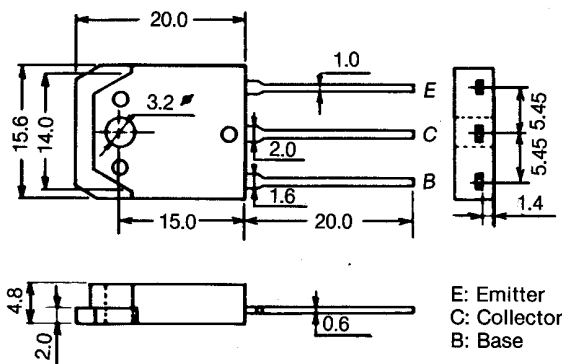


# ELECTRICAL CHARACTERISTICS @ Ta = 25°C

| CHARACTERISTIC                                                                                                                                                                                                         | SYMBOL         | MIN             | MAX               | UNIT         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|-------------------|--------------|
| COLLECTOR-EMITTER SUSTAINING VOLTAGE<br>( $I_C = 30 \text{ mAdc}$ , $I_B = 0$ )<br>TIP140, TIP145<br>TIP141, TIP146<br>TIP142, TIP147                                                                                  | $V_{CEO(SUS)}$ | 60<br>80<br>100 | —<br>—<br>—       | Vdc          |
| COLLECTOR CUTOFF CURRENT<br>( $V_{CE} = 30 \text{ Vdc}$ , $I_B = 0$ )<br>( $V_{CE} = 40 \text{ Vdc}$ , $I_B = 0$ )<br>( $V_{CE} = 50 \text{ Vdc}$ , $I_B = 0$ )<br>TIP140, TIP145<br>TIP141, TIP146<br>TIP142, TIP147  | $I_{CEO}$      | —<br>—<br>—     | 2.0<br>2.0<br>2.0 | mAdc         |
| COLLECTOR CUTOFF CURRENT<br>( $V_{CB} = 60 \text{ Vdc}$ , $I_E = 0$ )<br>( $V_{CB} = 80 \text{ Vdc}$ , $I_E = 0$ )<br>( $V_{CB} = 100 \text{ Vdc}$ , $I_E = 0$ )<br>TIP140, TIP145<br>TIP141, TIP146<br>TIP142, TIP147 | $I_{CBO}$      | —<br>—<br>—     | 1.0<br>1.0<br>1.0 | mAdc         |
| EMITTER CUTOFF CURRENT<br>( $V_{BE} = 5.0 \text{ Vdc}$ , $I_C = 0$ )                                                                                                                                                   | $I_{EBO}$      | —               | 2.0               | mAdc<br>mAdc |
| DC CURRENT GAIN<br>( $I_C = 5.0 \text{ Adc}$ , $V_{CE} = 4.0 \text{ Vdc}$ )<br>( $I_C = 10.0 \text{ Adc}$ , $V_{CE} = 4.0 \text{ Vdc}$ )                                                                               | $h_{FE}$       | 1000<br>500     | —<br>—            | —            |
| COLLECTOR-EMITTER SATURATION VOLTAGE<br>( $I_C = 5.0 \text{ Adc}$ , $I_B = 10 \text{ mAdc}$ )<br>( $I_C = 10.0 \text{ Adc}$ , $I_B = 40 \text{ mAdc}$ )                                                                | $V_{CE(SAT)}$  | —<br>—          | 2.0<br>3.0        | Vdc          |
| BASE-EMITTER ON VOLTAGE<br>( $I_C = 10.0 \text{ Adc}$ , $V_{CE} = 4.0 \text{ Vdc}$ )                                                                                                                                   | $V_{BE(ON)}$   | —               | 3.0               | Vdc          |
| GAIN BANDWIDTH PRODUCT<br>( $I_C = 5.0 \text{ A}$ , $V_{CE} = 5.0 \text{ V}$ )                                                                                                                                         | $f_T$          | 20 typ.         |                   | mHz          |
|                                                                                                                                                                                                                        |                |                 |                   |              |





## SWITCHING TIME TEST CIRCUIT

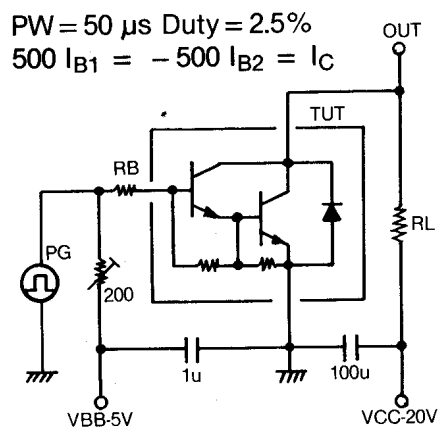





## DARLINGTON SCHEMATIC

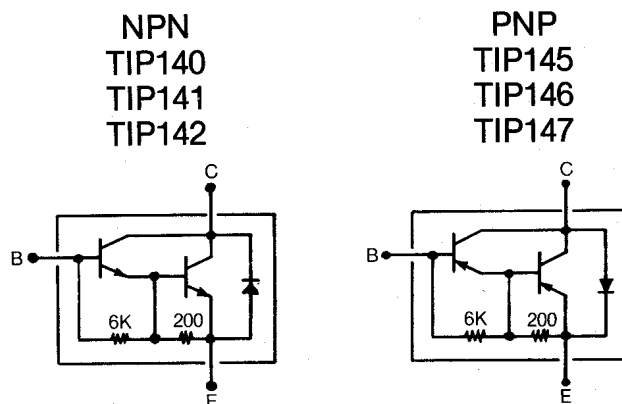




NPN  
TIP 140, TIP 141, TIP 142

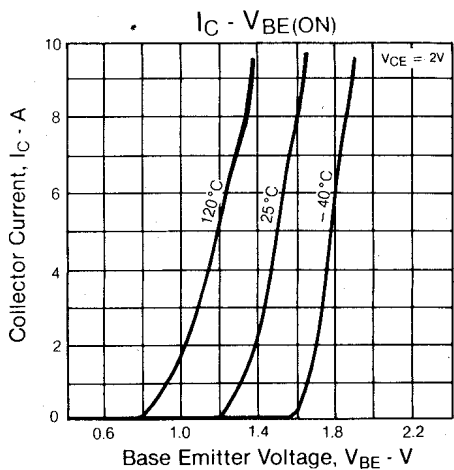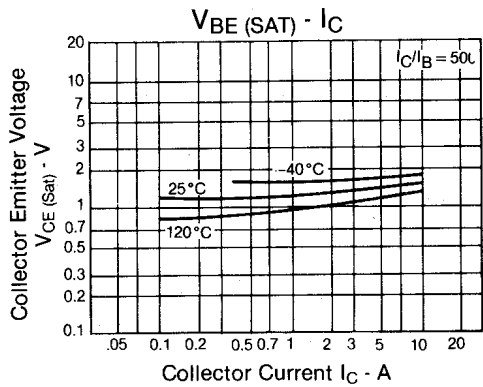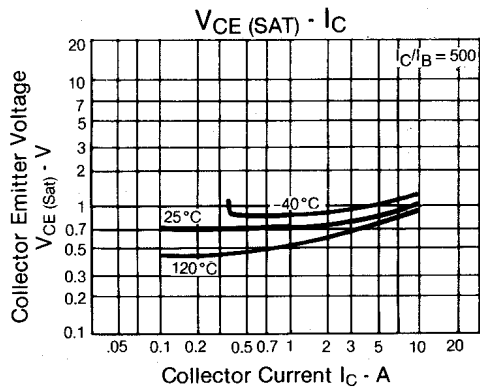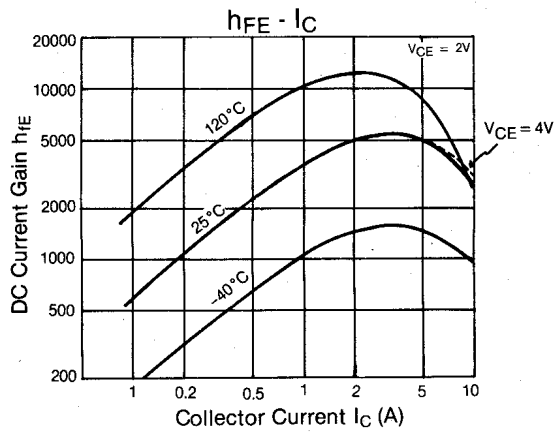




PNP  
TIP 145, TIP 146, TIP 147

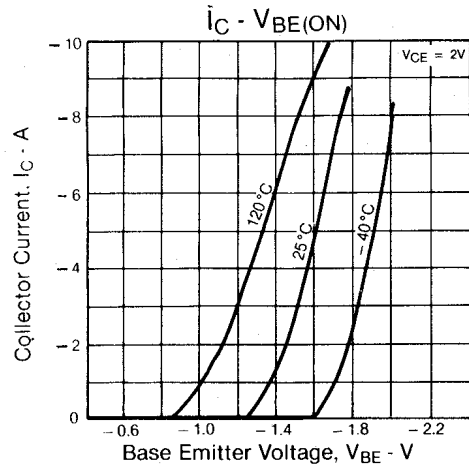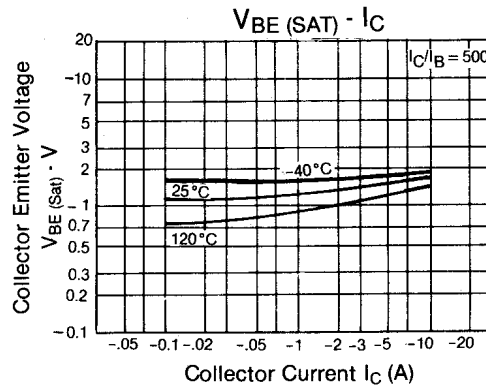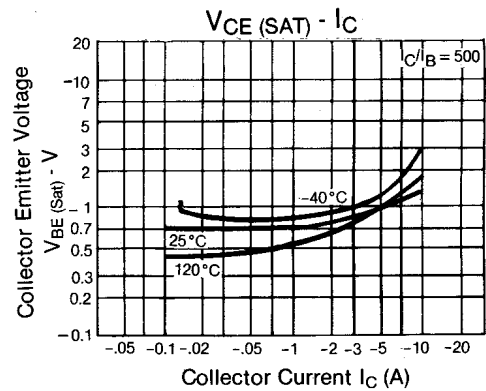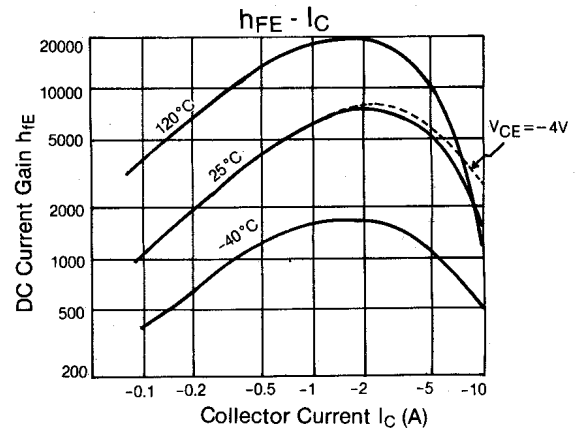

NPN  
TIP 140, TIP 141, TIP 142

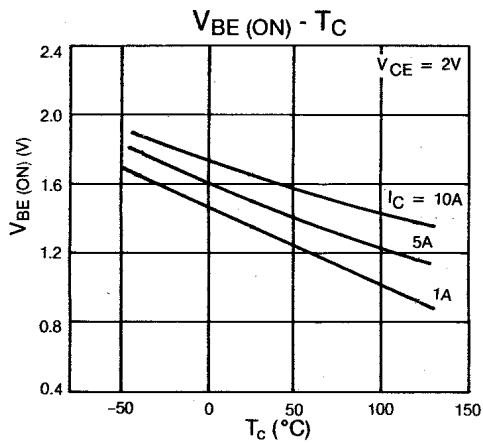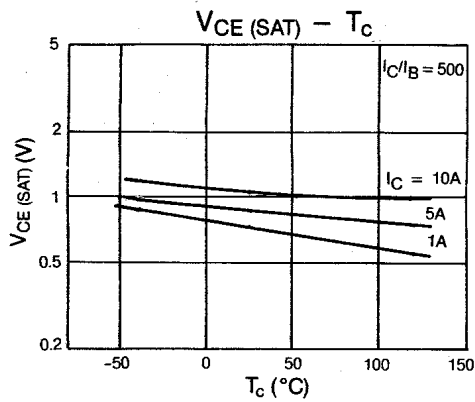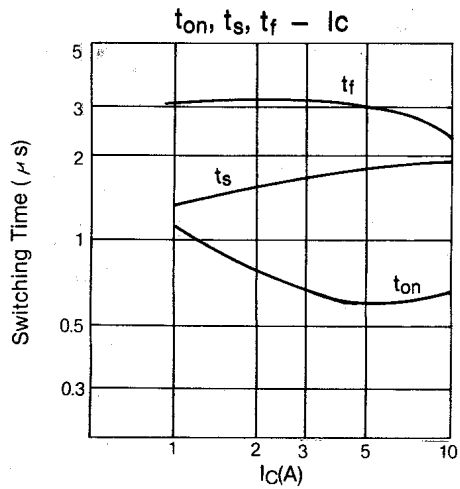

PNP  
TIP 145, TIP 146, TIP 147

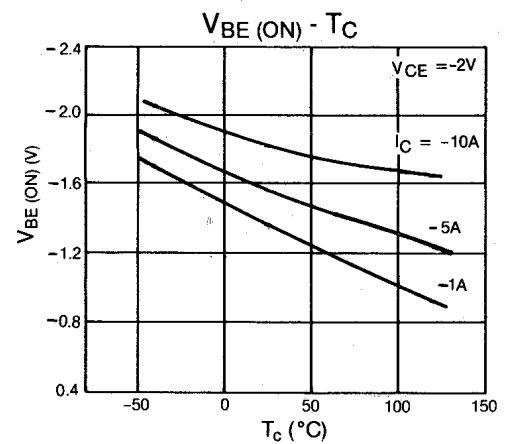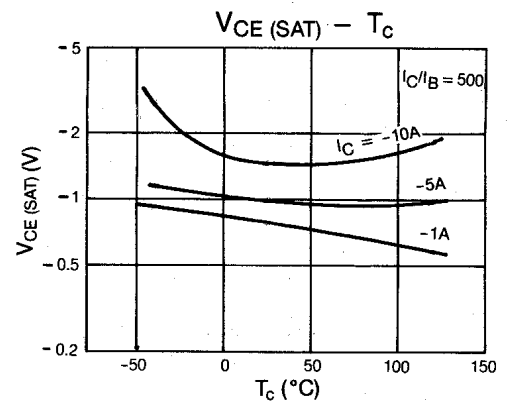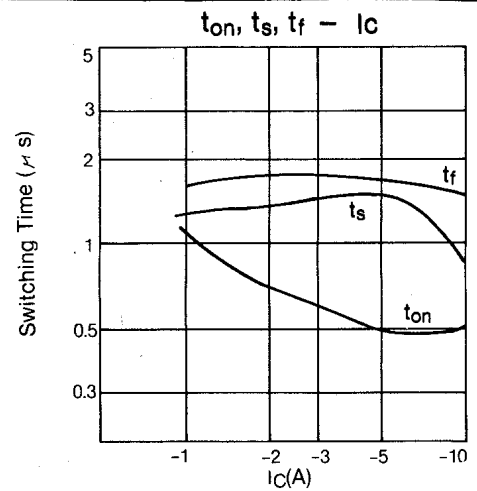

TEN FOUR LTD.  
1535 Alps Road  
WAYNE, NEW JERSEY 07470  
(201) 696-3987 TWX 710-988-0703