



HiPerFRED™ Epitaxial Diode with soft recovery

$I_{FAV} = 2x 100 A$
 $V_{RRM} = 400 V$
 $t_{rr} = 30 ns$

V_{RSM}	V_{RRM}	Type
V	V	
400	400	DSEP 2x 101-04A



miniBLOC, SOT-227 B



Symbol	Conditions	Maximum Ratings	
I_{FRMS}		100	A
I_{FAVM}	$T_C = 60^\circ C$; rectangular, $d = 0.5$	100	A
I_{FSM}	$T_{VJ} = 45^\circ C$; $t_p = 10 ms$ (50 Hz), sine	1000	A
E_{AS}	$T_{VJ} = 25^\circ C$; non-repetitive $I_{AS} = 4 A$; $L = 180 \mu H$	2	mJ
I_{AR}	$V_A = 1.5 \cdot V_R$ typ.; $f = 10 kHz$; repetitive	0.4	A
T_{VJ}		-40...+150	°C
T_{VJM}		150	°C
T_{stg}		-40...+150	°C
P_{tot}	$T_C = 25^\circ C$	200	W
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1 mA$	2500	V~
M_d	mounting torque (M4)	1.1-1.5/9-13	Nm/lb.in.
	terminal connection torque (M4)	1.1-1.5/9-13	Nm/lb.in.
Weight	typical	30	g

Features

- International standard package miniBLOC
- Isolation voltage 2500 V~
- UL registered E 72873
- 2 independent FRED in 1 package
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behaviour

Applications

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{RM} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1 mA 4 mA
V_F ②	$I_F = 100 A$; $T_{VJ} = 125^\circ C$ $T_{VJ} = 25^\circ C$		1.24 V 1.54 V
R_{thJC}			0.6 K/W
R_{thCH}	with heatsink compound	0.1	K/W
t_{rr}	$I_F = 1 A$; $-di/dt = 400 A/\mu s$; $V_R = 30 V$; $T_{VJ} = 25^\circ C$	30	ns
I_{RM}	$V_R = 100 V$; $I_F = 200 A$; $-di_F/dt = 100 A/\mu s$ $T_{VJ} = 100^\circ C$	5.5	6.8 A

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
 ② Pulse Width = 300 μs , Duty Cycle < 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, test conditions and dimensions.

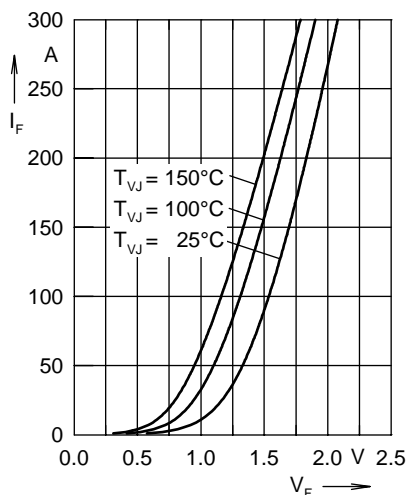


Fig. 1 Forward current I_F versus V_F

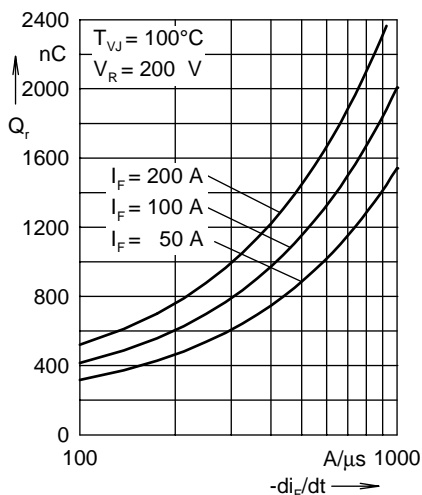


Fig. 2 Typ. reverse recovery charge Q_r versus $-di_F/dt$

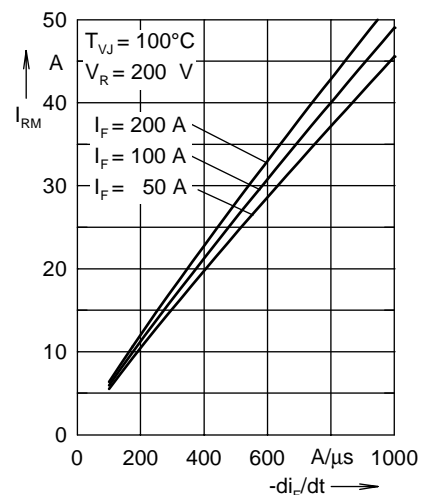


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

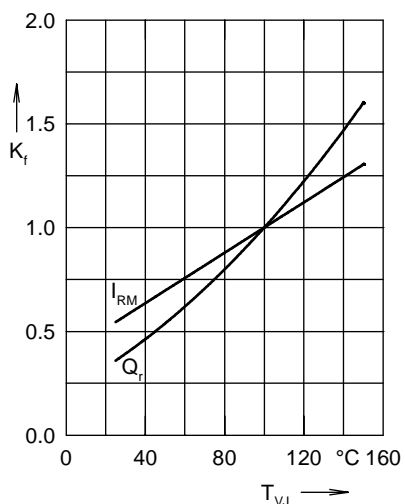


Fig. 4 Typ. dynamic parameters Q_r, I_{RM} versus T_{VJ}

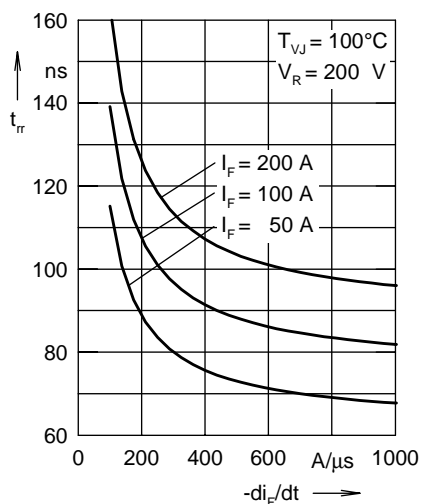


Fig. 5 Typ. recovery time t_{tr} versus $-di_F/dt$

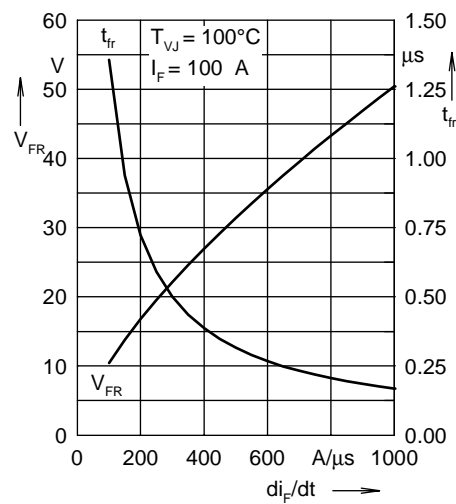


Fig. 6 Peak forward voltage V_{FR} and t_{tr} versus di_F/dt

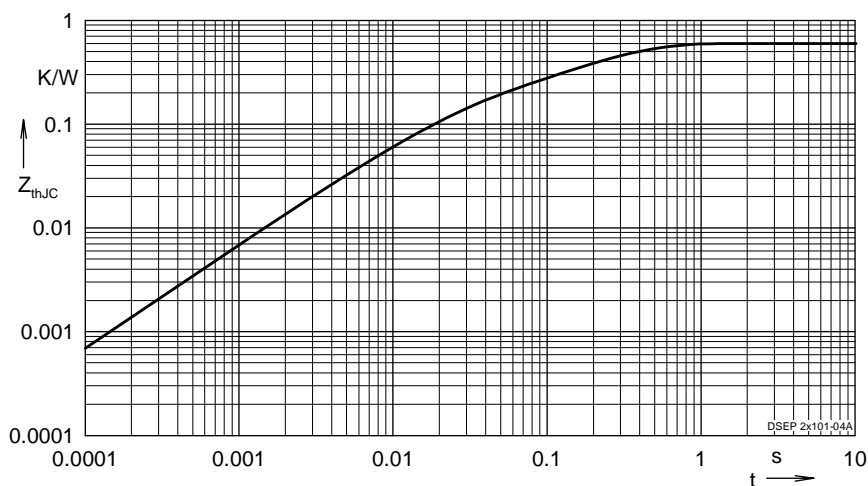


Fig. 7 Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.212	0.0055
2	0.248	0.0092
3	0.063	0.0007
4	0.077	0.0391

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.