

E-Series Surface Mount Mixer

1805 - 1880 & 925 - 960 MHz




Features

- LO Power +7 dBm
- Up to +7 dBm RF
- Surface Mount



SM-1 Package

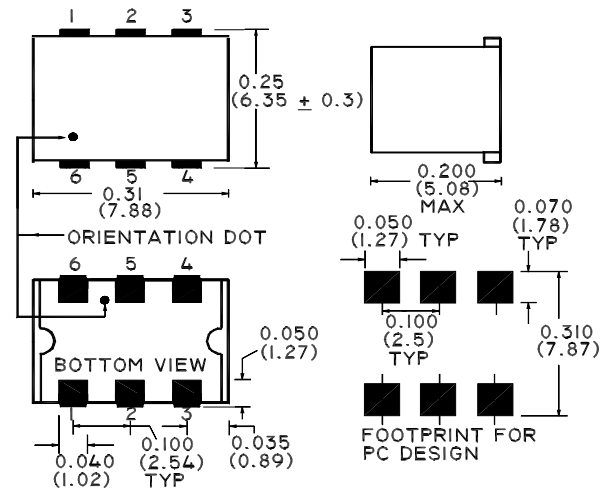

Description

M/A-COM's EMRS-6X1 is a low drive, surface mount mixer suitable for use in wireless applications.

Electrical Specifications @ -55°C - +100°C, $Z_0 = 50$ Ohms, LO = +7dBm

Parameter	Units	Minimum	Typical	Maximum
Frequency Range (1)				
RF 1805 - 1880	MHz	—	—	—
LO 95	MHz	—	—	—
IF 1710 - 1785	MHz	—	—	—
Frequency Range (2)				
RF 925 - 960	MHz	—	—	—
LO 45	MHz	—	—	—
IF 820 - 915	MHz	—	—	—
Conversion Loss				
1805 - 1880 MHz	dB	8.5	9.5	11.0
925 - 960 MHz	dB	6.5	7.0	9.0
Isolation (LO - RF)				
95 MHz & 45 MHz	dB	25	35	55
Isolation (LO - IF)				
95 MHz & 45 MHz	dB	25	30	40
RF Input for 1dB Compression	dBm	—	—	+7
RF VSWR	—	1.3:1	2.4:1	3.0:1
LO VSWR	—	1.4:1	1.6:1	1.8:1
IF VSWR	—	1.1:1	1.4:1	1.8:1

V1.00 S 0520 H

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to +100°C
Operating Temperature	-55°C to +100°C
Pin Temperature (10 Seconds)	260°C

Functional Configuration


Function	Pin No.
LO I/P	1
RF O/P	4
IF I/P	5
Ground	2, 3, 6
Case Ground	—
Unconnected	—

V1.00 S 0520 H


www.macom.com

M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.





LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.