

POWER MANAGEMENT

3-Pin Microcontroller Power Supply Supervisor

The IMP809/IMP810 are 3.0V, 3.3V and 5.0V power supply supervisor circuits optimized for low-power microprocessor (μ P), microcontroller (μ C) and digital systems. The IMP809/810 are improved drop-in replacements for the Maxim MAX809/810 and feature 60% lower supply current.

A reset signal is issued if the power supply voltage drops below a preset reset threshold and is asserted for at least 140ms after the supply has risen above the reset threshold. The IMP809 has an active-low RESET output that is guaranteed to be in the correct state for V_{CC} down to 1.1V. The IMP810 has an active-high RESET output. The reset comparator is designed to ignore fast transients on V_{CC} .

Low supply current makes the IMP809/IMP810 ideal for use in portable and battery operated equipment. The IMP809/IMP810 are available in a compact 3-pin SOT23 package.

Six voltage thresholds are available to support 3V to 5V systems:

Reset Threshold	
Suffix	Voltage (V)
L	4.63
M	4.38
J	4.00
T	3.08
S	2.93
R	2.63


Key Features

- ◆ Improved Maxim MAX809/MAX810 replacement
 - Lower supply current...6 μ A
 - 80% lower maximum supply current
- ◆ Monitor 5V, 3.3V and 3V supplies
- ◆ 140ms min. reset pulse width
- ◆ Active-low reset valid with 1.1V supply (IMP809)
- ◆ Small 3-pin SOT-23 package
- ◆ No external components
- ◆ Specified over full temperature range
 - -40°C to 105°C

Applications


- ◆ Embedded controllers
- ◆ Battery operated systems
- ◆ Intelligent instruments
- ◆ Wireless communication systems
- ◆ PDAs and handheld equipment

Block Diagrams

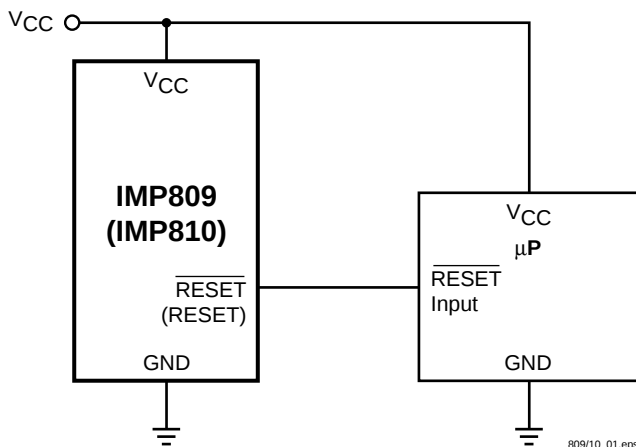

Pin Configuration

SOT23

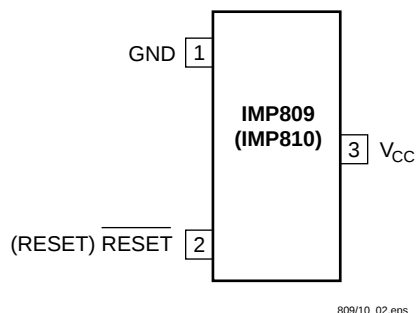

Ordering Information

Part Number ¹	Reset Threshold (V)	Temperature Range	Pin-Package	Package Marking ² (XX Lot Code)
IMP809 Active LOW Reset				
IMP809LEUR-T	4.63	-40°C to +105°C	3-SOT23	AAXX
IMP809MEUR-T	4.38	-40°C to +105°C	3-SOT23	ABXX
IMP809JEUR-T	4.00	-40°C to +105°C	3-SOT23	CWXX
IMP809TEUR-T	3.08	-40°C to +105°C	3-SOT23	ACXX
IMP809SEUR-T	2.93	-40°C to +105°C	3-SOT23	ADXX
IMP809REUR-T	2.63	-40°C to +105°C	3-SOT23	AFXX
IMP810 Active HIGH Reset				
IMP810LEUR-T	4.63	-40°C to +105°C	3-SOT23	AGXX
IMP810MEUR-T	4.38	-40°C to +105°C	3-SOT23	AHXX
IMP810JEUR-T	4.00	-40°C to +105°C	3-SOT23	AIXX
IMP810TEUR-T	3.08	-40°C to +105°C	3-SOT23	AJXX
IMP810SEUR-T	2.93	-40°C to +105°C	3-SOT23	AKXX
IMP810REUR-T	2.63	-40°C to +105°C	3-SOT23	ALXX

Notes: 1. Tape and Reel packaging is indicated by the -T designation.
2. Devices may also be marked with full part number: 809L, 810M etc. XX refers to lot.

Related Products

	IMP809	IMP810	IMP811	IMP812
Max. Supply Current	15µA	15µA	15µA	15µA
Package Pins	3	3	4	4
Manual RESET input			■	■
Package Type	SOT-23	SOT-23	SOT-143	SOT-143
Active-HIGH RESET output		■		■
Active-LOW RESET output	■		■	

Absolute Maximum Ratings

Pin Terminal Voltage with Respect to Ground

V_{CC}	−0.3V to 6.0V
RESET, $\overline{\text{RESET}}$	−0.3V to ($V_{CC} + 0.3V$)
Input Current at V_{CC}	20mA
Output Current: RESET, $\overline{\text{RESET}}$	20mA
Rate of Rise at V_{CC}	100V/ μ s

These are stress ratings only and functional operation is not implied.
Exposure to absolute maximum ratings for prolonged time periods may affect device reliability

Power Dissipation ($T_A = 70^\circ\text{C}$)	320mW
(Derate 4mW/ $^\circ\text{C}$ above 70 $^\circ\text{C}$)	
Operating Temperature Range	−40 $^\circ\text{C}$ to 105 $^\circ\text{C}$
Storage Temperature Range	−65 $^\circ\text{C}$ to 160 $^\circ\text{C}$
Lead Temperature (soldering, 10 sec)	300 $^\circ\text{C}$

Electrical Characteristics

Unless otherwise noted V_{CC} is over the full voltage range, $T_A = -40^\circ\text{C}$ to 105 $^\circ\text{C}$.

Typical values at $T_A = 25^\circ\text{C}$, $V_{CC} = 5V$ for L/M/J devices, $V_{CC} = 3.3V$ for T/S devices and $V_{CC} = 3V$ for R devices.

Parameter	Symbol	Conditions		Min	Typ	Max	Units
Input Voltage (V _{CC}) Range	V _{CC}	T _A = 0°C to 70°C T _A = −40°C to 105°C		1.1 1.2		5.5 5.5	V
Supply Current	I _{CC}	T _A = −40°C to 85°C T _A = −40°C to 85°C T _A = 85°C to 105°C T _A = 85°C to 105°C	V _{CC} < 5.5V, L/M/J V _{CC} < 3.6V, R/S/T V _{CC} < 5.5V, L/M/J V _{CC} < 3.6V, R/S/T		9 6	15 10 25 20	μA
Reset Threshold	V _{TH}	L devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	4.56 4.50 4.40	4.63	4.70 4.75 4.86	V
		M devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	4.31 4.25 4.16	4.38	4.45 4.50 4.56	
		J devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	3.93 3.89 3.80	4.00	4.06 4.10 4.20	
		T devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	3.04 3.00 2.92	3.08	3.11 3.15 3.23	
		S devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	2.89 2.85 2.78	2.93	2.96 3.00 3.08	
		R devices	T _A = 25°C T _A = −40°C to 85°C T _A = 85°C to 105°C	2.59 2.55 2.50	2.63	2.66 2.70 2.76	
Reset Threshold Stability				30		ppm/°C	
V _{CC} to Reset Delay		V _{CC} = V _{TH} to V _{TH} - 100mV			20		μs
Reset Active Timeout Period	V _{OL}	T _A = −40°C to 85°C		140	240	560	ms
		T _A = 85°C to 105°C		100		840	
Low RESET Output Voltage (IMP809)	V _{OL}	V _{CC} = V _{TH} min., I _{SINK} = 1.2mA, IMP809R/S/T				0.3	V
		V _{CC} = V _{TH} min., I _{SINK} = 3.2mA, IMP809L/M/J				0.4	
		V _{CC} > 1.1V, I _{SINK} = 50μA				0.3	
High RESET Output Voltage (IMP809)	V _{OH}	V _{CC} > V _{TH} max., I _{SOURCE} = 500μA, IMP809R/S/T		0.8V _{CC}			V
		V _{CC} > V _{TH} max., I _{SOURCE} = 800μA, IMP809L/M/J		V _{CC} -1.5			
Low RESET Output Voltage (IMP810)	V _{OL}	V _{CC} = V _{TH} max., I _{SINK} = 1.2mA, IMP810R/S/T				0.3	V
		V _{CC} = V _{TH} max., I _{SINK} = 3.2mA, IMP810L/M/J				0.4	
High RESET Output Voltage (IMP810)	V _{OH}	1.8V < V _{CC} < V _{TH} min., I _{SOURCE} = 150μA		0.8V _{CC}			V

Notes: 1. Production testing done at $T_A = 25^\circ\text{C}$. Over-temperature specifications guaranteed by design only.
2. RESET output is active LOW for the IMP809 and RESET output is active HIGH for the IMP810

Pin Descriptions

Pin Number	Name	Function
1	GND	Ground
2 (IMP809)	$\overline{\text{RESET}}$	$\overline{\text{RESET}}$ is asserted LOW if V_{CC} falls below the reset threshold and remains LOW for the 240ms typical reset timeout period (140ms minimum) after V_{CC} exceeds the threshold.
2 (IMP810)	RESET	RESET is asserted HIGH if V_{CC} falls below the reset threshold and remains HIGH for the 240ms typical reset timeout period (140ms minimum) after V_{CC} exceeds the threshold.
3	V_{CC}	Power supply input voltage (3.0V, 3.3V, 5.0V)

Detailed Descriptions

Reset Timing

The reset signal is asserted–LOW for the IMP809 and HIGH for the IMP810–when the V_{CC} signal falls below the threshold trip voltage and remains asserted for 140ms minimum after the V_{CC} has risen above the threshold.

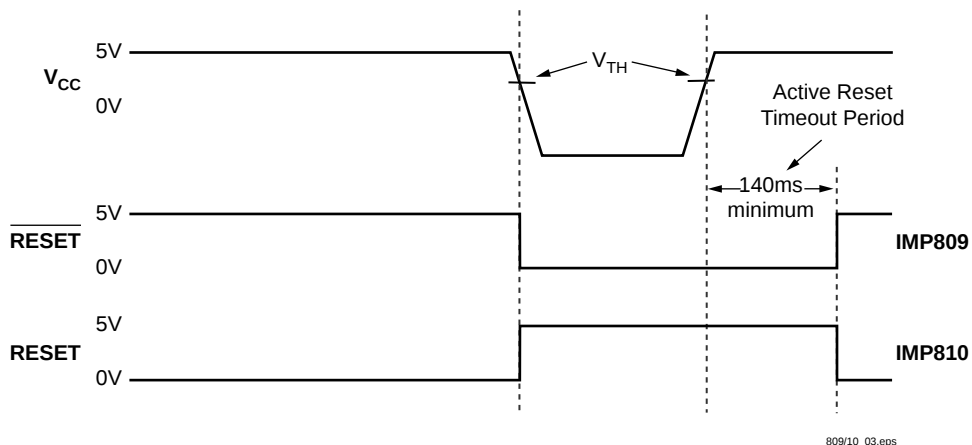


Figure 1. Reset Timing Diagram

Application Information

Negative V_{CC} Transients

The IMP809/810 protect μ P's from brownouts and low V_{CC} . Short duration transients of 100mV amplitude and 20 μ s or less duration typically do not cause a false RESET.

Valid Reset with V_{CC} under 1.1V

To ensure logic inputs connected to the IMP809 $\overline{\text{RESET}}$ pin are in a known state when V_{CC} is under 1.1V, a 100k Ω pull-down

resistor at $\overline{\text{RESET}}$ is needed. The value is not critical. A pull-up resistor to V_{CC} is needed with the IMP810.

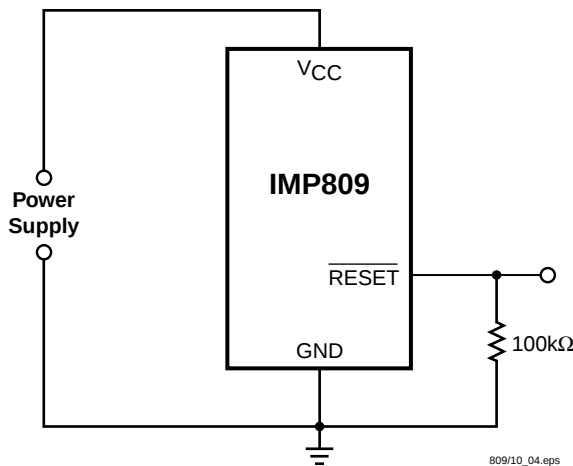


Figure 2. $\overline{\text{RESET}}$ Valid with V_{CC} Under 1.1V

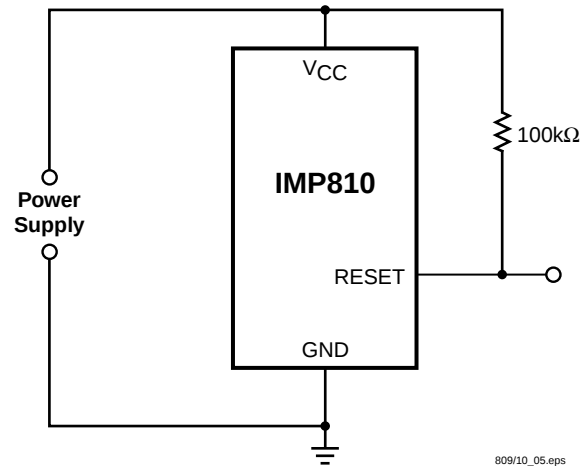


Figure 3. RESET Valid with V_{CC} Under 1.1V

Bi-directional Reset Pin Interfacing

The IMP809/810 can interface with μ P/ μ C bi-directional reset pins by connecting a 4.7k Ω resistor in series with the IMP809/810 reset output and the μ P/ μ C bi-directional reset pin.


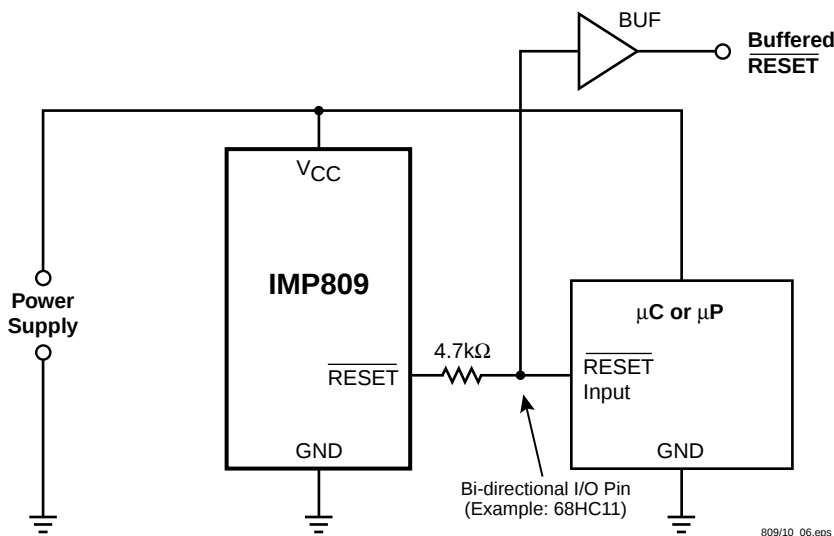


Figure 4. Bi-directional Reset Pin Interfacing

Package Dimensions

Plastic SOT-23 (3-Pin)

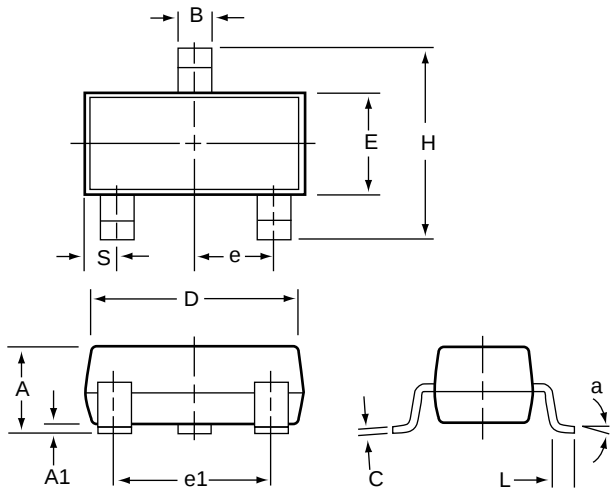

SOT-23 (3-Pin).eps

Inches			Millimeters	
	Min	Max	Min	Max
Plastic SOT-23 (3-Pin)				
A	0.031	0.050	0.80	1.27
A1	0.004	0.010	0.10	0.25
B	0.015	0.020	0.37	0.51
C	0.003	0.007	0.085	0.18
D	0.110	0.120	2.80	3.04
E	0.047	0.055	1.20	1.40
e	0.035	0.040	0.89	1.03
e1	0.070	0.080	1.78	2.05
H	0.083	0.1039	2.10	2.64
L	0.027 REF		0.069 REF	
S	0.018	0.024	0.45	0.60



IMP, Inc.
Corporate Headquarters
2830 N. First Street
San Jose, CA 95134-2071
Tel: 408-432-9100
Tel: 800-438-3722
Fax: 408-434-0335
Fax-on-Demand: 1-800-249-1614 (USA)
Fax-on-Demand: 1-303-575-6156 (International)
e-mail: info@impinc.com
<http://www.impweb.com>

The IMP logo is a registered trademark of IMP, Inc.
All other company and product names are trademarks of their respective owners.

© 1998 IMP, Inc.
Printed in USA
Preliminary
Part No.: IMP809-810
Document Number: IMP809-6-6/98

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.