

SOT223 PNP SILICON PLANAR MEDIUM POWER TRANSISTOR

FZT753


ISSUE 4– FEBRUARY 1996

FEATURES

- * Low saturation voltage
- * Excellent h_{FE} specified up to 2A

COMPLEMENTARY TYPE – FZT653

PARTMARKING DETAIL – FZT753



ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-5	V
Peak Pulse Current	I_{CM}	-6	A
Continuous Collector Current	I_C	-2	A
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	2	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-120			V	$I_C = -100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-100			V	$I_C = -10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-5			V	$I_E = -100\mu A$
Collector Cut-Off Current	I_{CBO}			-0.1 -10	μA	$V_{CB} = -100V$ $V_{CB} = -100V, T_{amb} = 100^{\circ}C$
Emitter Cut-Off Current	I_{EBO}			-0.1	μA	$V_{EB} = -4V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-0.17 -0.30	-0.3 -0.5	V	$I_C = -1A, I_B = -100mA^*$ $I_C = -2A, I_B = -200mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.9	-1.25	V	$I_C = -1A, I_B = -100mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-0.8	-1.0	V	$I_C = -1A, V_{CE} = -2V^*$
Static Forward Current Transfer Ratio	h_{FE}	70 100 55 25	200 200 170 55	300		$I_C = -50mA, V_{CE} = -2V^*$ $I_C = -500mA, V_{CE} = -2V^*$ $I_C = -1A, V_{CE} = -2V^*$ $I_C = -2A, V_{CE} = -2V^*$
Transition Frequency	f_T	100	140		MHz	$I_C = -100mA, V_{CE} = -5V$ $f = 100MHz$
Output Capacitance	C_{obo}			30	pF	$V_{CB} = -10V, f = 1MHz$
Switching Times	t_{on}		40		ns	$I_C = -500mA, V_{CC} = -10V$ $I_{B1} = I_{B2} = -50mA$
	t_{off}		600		ns	

*Measured under pulsed conditions. Pulse Width=300 μs . Duty cycle $\leq 2\%$
Spice parameter data is available upon request for this device

TYPICAL CHARACTERISTICS

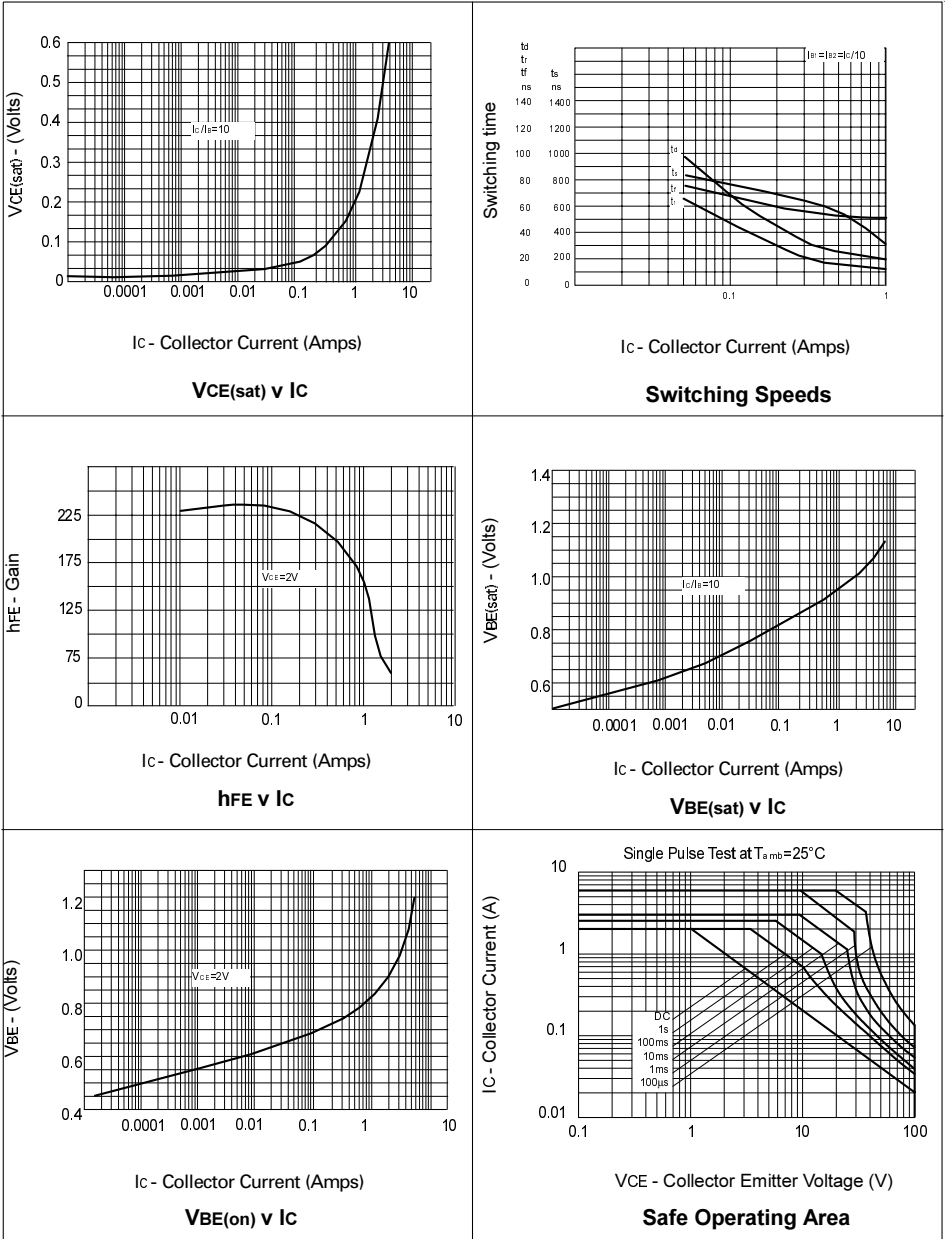



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.