

GENERAL PURPOSE APPLICATION.  
SWITCHING APPLICATION.


#### FEATURES

- Complementary to BCW31/32


#### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-30	V
Collector-Emitter Voltage	$V_{CEO}$	-20	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Collector Power Dissipation	$P_C^*$	350	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-65 ~ 150	°C

\* : Package Mounted On 99.9% Alumina 10×8×0.6mm.

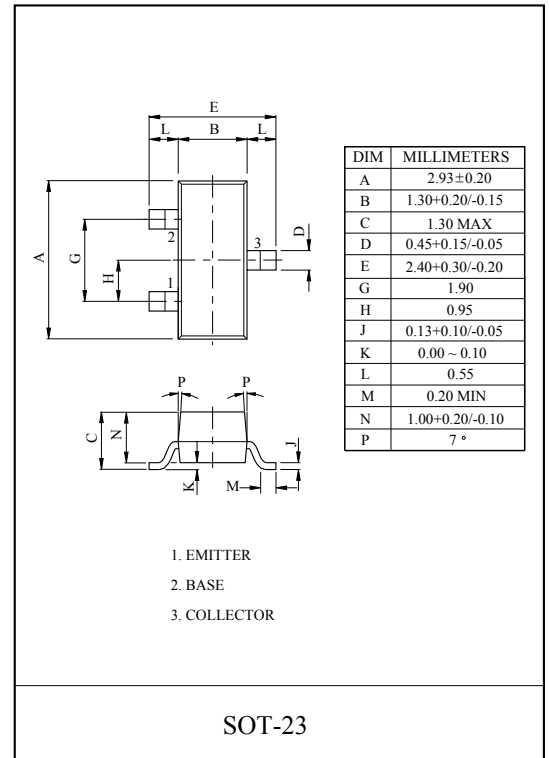

#### Marking

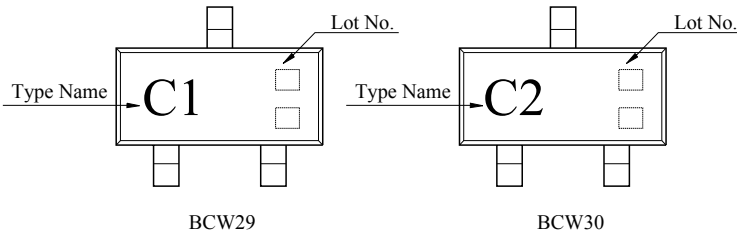

#### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C = -10\mu A$	-30	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = -2mA$	-20	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E = -10\mu A$	-5	-	-	V
Collector Cut-off Current		$I_{CBO}$	$V_{CB} = -30V$	-	-	-100	nA
Emitter Cut-off Current		$I_{EBO}$	$V_{EB} = -5V$	-	-	-100	nA
DC Current Gain	BCW29	$h_{FE}$	$V_{CE} = -5V, I_C = -2mA$	110	-	220	
	BCW30			200	-	450	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$	-	-	-0.25	V
Base-Emitter On Voltage		$V_{BE(ON)}$	$V_{CE} = -5V, I_C = -2mA$	-0.55	-	-0.7	V
Collector Output Capacitance		$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	-	4	pF
Noise Figure		NF	$V_{CE} = -5V, I_C = -0.2mA$ $R_S = 2k\Omega, f = 1kHz$	-	-	10	dB



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.