

## OptiMOS<sup>â</sup> Buck converter series

### Feature



- N-Channel
- Logic Level
- Low On-Resistance  $R_{DS(on)}$
- Excellent Gate Charge x  $R_{DS(on)}$  product (FOM)
- Superior thermal resistance
- 175°C operating temperature
- Avalanche rated
- dv/dt rated
- Ideal for fast switching buck converters

### Product Summary

$V_{DS}$	30	V
$R_{DS(on)}$ max. SMD version	8.9	m $\Omega$
$I_D$	73	A

P- TO263 -3-2

P- TO220 -3-1

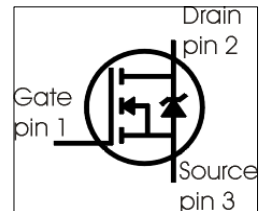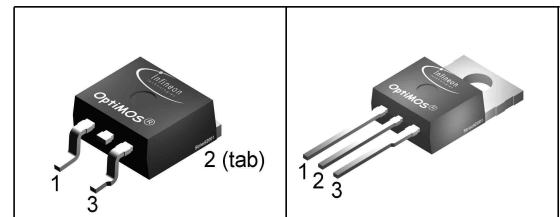

Type	Package	Ordering Code	Marking
IPP10N03L	P- TO220 -3-1	Q67042-S4040	10N03L
IPB10N03L	P- TO263 -3-2	Q67040-S4346	10N03L

### Maximum Ratings, at $T_i = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current <sup>1)</sup> $T_C=25^\circ\text{C}$	$I_D$	73 63	A
Pulsed drain current $T_C=25^\circ\text{C}$	$I_{D \text{ puls}}$	292	
Avalanche energy, single pulse $I_D=30\text{A}$ , $V_{DD}=25\text{V}$ , $R_{GS}=25\Omega$	$E_{AS}$	25	mJ
Repetitive avalanche energy, limited by $T_{jmax}$ <sup>2)</sup>	$E_{AR}$	10	
Reverse diode dv/dt $I_S=73\text{A}$ , $V_{DS}=24$ , $di/dt=200\text{A}/\mu\text{s}$ , $T_{jmax}=175^\circ\text{C}$	dv/dt	6	kV/ $\mu\text{s}$
Gate source voltage	$V_{GS}$	$\pm 20$	V
Power dissipation $T_C=25^\circ\text{C}$	$P_{tot}$	107	W
Operating and storage temperature	$T_i, T_{stg}$	-55... +175	$^\circ\text{C}$
IEC climatic category; DIN IEC 68-1		55/175/56	

**Thermal Characteristics**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - case	$R_{thJC}$	-	0.9	1.4	K/W
SMD version, device on PCB:	$R_{thJA}$				
@ min. footprint		-	-	62	
@ 6 cm <sup>2</sup> cooling area <sup>3)</sup>		-	-	40	

**Electrical Characteristics, at  $T_j = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Drain-source breakdown voltage $V_{GS}=0V, I_D=1mA$	$V_{(BR)DSS}$	30	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=60\mu A$	$V_{GS(th)}$	1.2	1.6	2	
Zero gate voltage drain current $V_{DS}=30V, V_{GS}=0V, T_j=25^\circ\text{C}$ $V_{DS}=30V, V_{GS}=0V, T_j=175^\circ\text{C}$	$I_{DSS}$	-	0.01	1	$\mu A$
		-	10	100	
Gate-source leakage current $V_{GS}=20V, V_{DS}=0V$	$I_{GSS}$	-	1	100	nA
Drain-source on-state resistance $V_{GS}=4.5V, I_D=36A$ $V_{GS}=4.5V, I_D=36A, \text{SMD version}$	$R_{DS(on)}$	-	9.9	13.4	m $\Omega$
		-	9.5	13.1	
Drain-source on-state resistance <sup>4)</sup> $V_{GS}=10V, I_D=36A$ $V_{GS}=10V, I_D=36A, \text{SMD version}$	$R_{DS(on)}$	-	6.8	9.2	
		-	6.5	8.9	

<sup>1</sup>Current limited by bondwire ; with an  $R_{thJC} = 1.4K/W$  the chip is able to carry  $I_D = 88A$  at  $25^\circ\text{C}$ , for detailed information see app.-note ANPS071E available at [www.infineon.com/optimos](http://www.infineon.com/optimos)

<sup>2</sup>Defined by design. Not subject to production test.

<sup>3</sup>Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70  $\mu\text{m}$  thick) copper area for drain connection. PCB is vertical without blown air.

<sup>4</sup>Diagrams are related to straight lead versions

**Electrical Characteristics**

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

**Dynamic Characteristics**

Transconductance	$g_{fs}$	$V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ , $I_D = 63A$	32	63	-	S
Input capacitance	$C_{iss}$	$V_{GS} = 0V$ , $V_{DS} = 25V$ , $f = 1MHz$	-	1290	1710	pF
Output capacitance	$C_{oss}$		-	500	670	
Reverse transfer capacitance	$C_{rss}$		-	130	190	
Gate resistance	$R_G$		-	1.4	-	$\Omega$
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V$ , $V_{GS} = 10V$ , $I_D = 18A$ , $R_G = 4.7\Omega$	-	7.7	11.6	ns
Rise time	$t_r$		-	20	30	
Turn-off delay time	$t_{d(off)}$		-	31.5	47.3	
Fall time	$t_f$		-	19	28.5	

**Gate Charge Characteristics**


Gate to source charge	$Q_{gs}$	$V_{DD} = 15V$ , $I_D = 36A$	-	4	5	nC
Gate to drain charge	$Q_{gd}$		-	10.6	13.3	
Gate charge total	$Q_g$	$V_{DD} = 15V$ , $I_D = 36A$ , $V_{GS} = 0$ to $5V$	-	19	23.8	
Output charge	$Q_{oss}$	$V_{DS} = 15V$ , $I_D = 36A$ , $V_{GS} = 0V$	-	18.2	22.8	nC
Gate plateau voltage	$V_{(plateau)}$	$V_{DD} = 15V$ , $I_D = 36A$	-	3.6	-	V

**Reverse Diode**

Inverse diode continuous forward current	$I_S$	$T_C = 25^\circ C$	-	-	73	A
Inv. diode direct current, pulsed	$I_{SM}$		-	-	292	
Inverse diode forward voltage	$V_{SD}$	$V_{GS} = 0V$ , $I_F = 73A$	-	0.96	1.28	V
Reverse recovery time	$t_{rr}$	$V_R = 15V$ , $I_F = I_S$ , $di_F/dt = 100A/\mu s$	-	32.9	41.2	ns
Reverse recovery charge	$Q_{rr}$		-	33	41	nC

**1 Power dissipation**


$$P_{\text{tot}} = f(T_C)$$

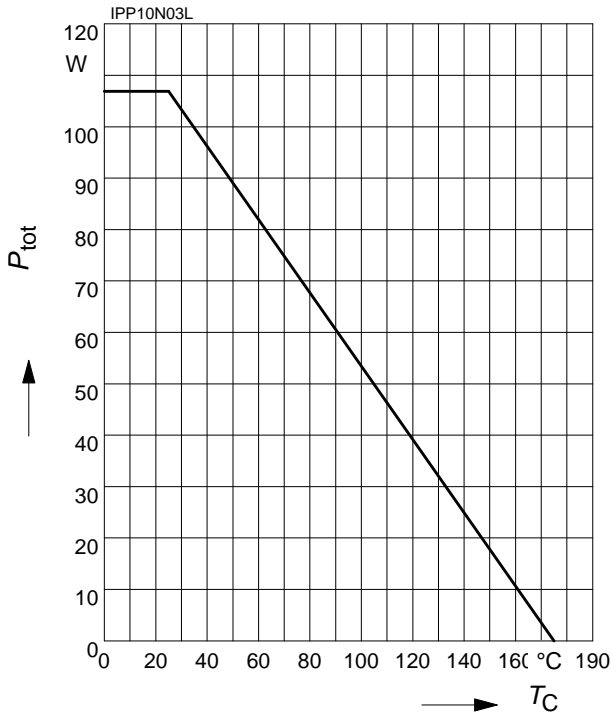

**2 Drain current**

$$I_D = f(T_C)$$


parameter:  $V_{GS} \geq 10 \text{ V}$

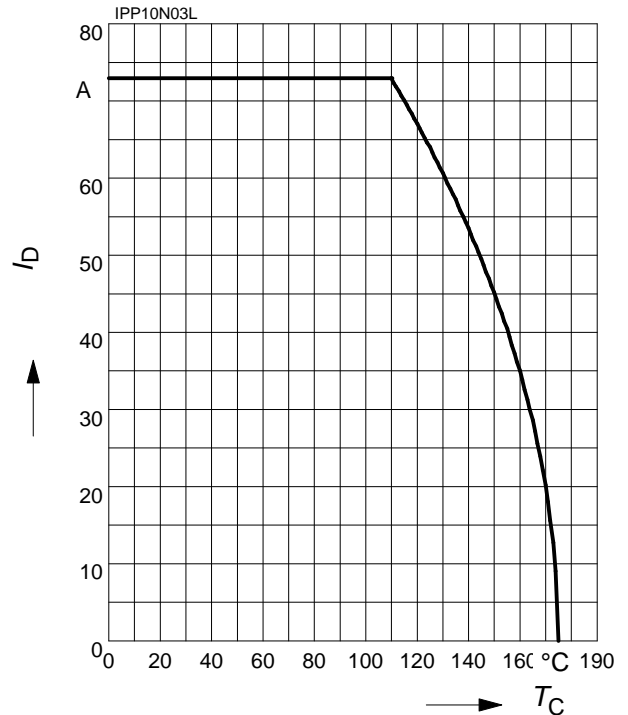

**3 Safe operating area**

$$I_D = f(V_{DS})$$


parameter:  $D = 0, T_C = 25^\circ\text{C}$

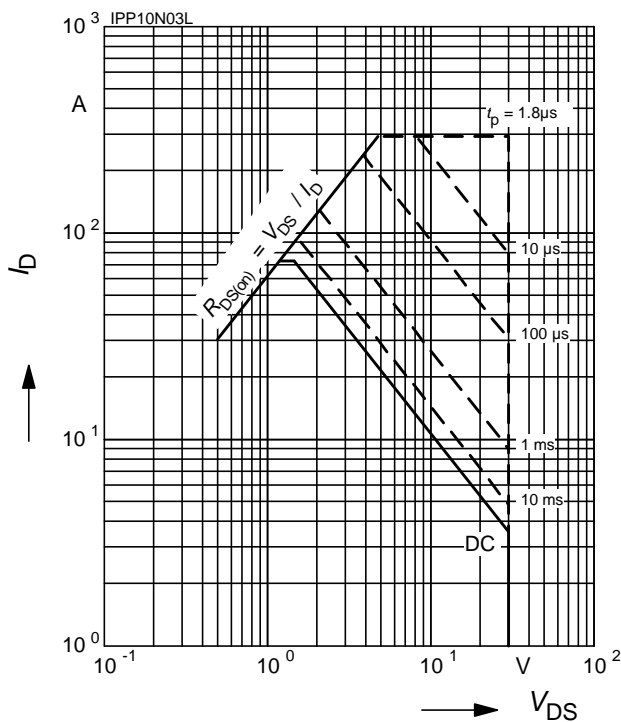

**4 Max. transient thermal impedance**


$$Z_{\text{thJC}} = f(t_p)$$

parameter:  $D = t_p/T$

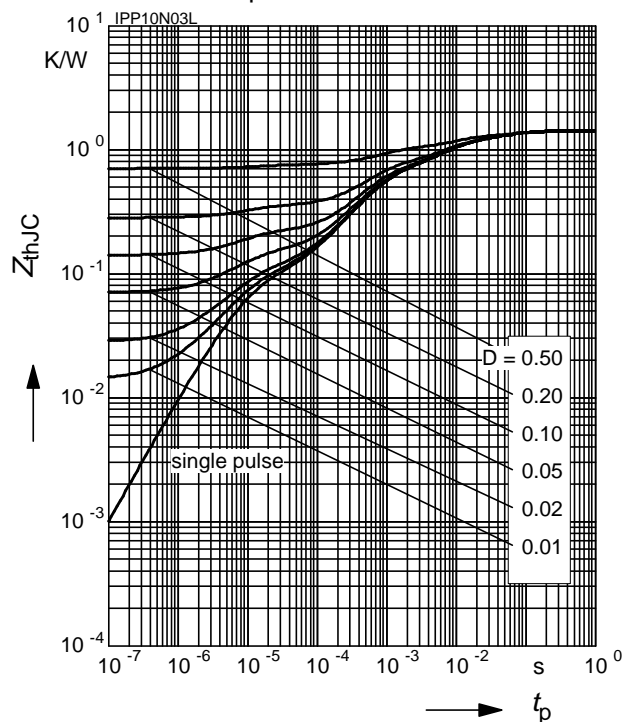


**5 Typ. output characteristic**

$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$   
parameter:  $t_p = 80 \mu\text{s}$

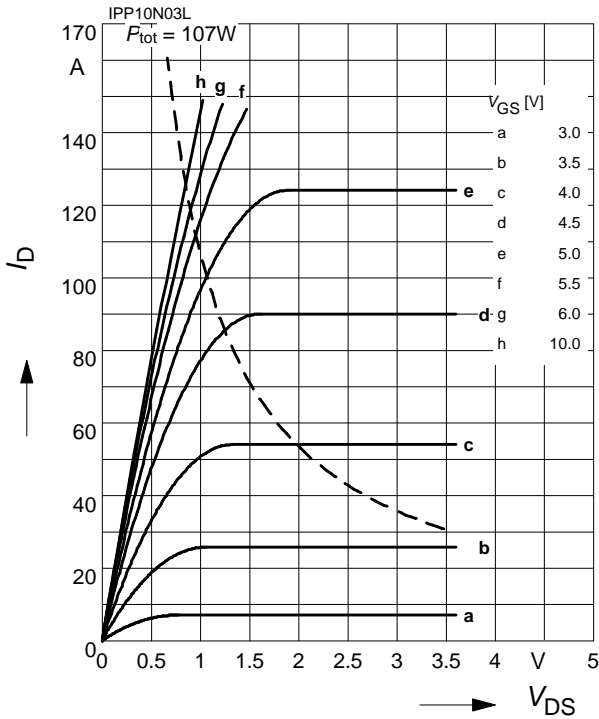


**6 Typ. drain-source on resistance**

$R_{DS(on)} = f(I_D)$   
parameter:  $V_{GS}$

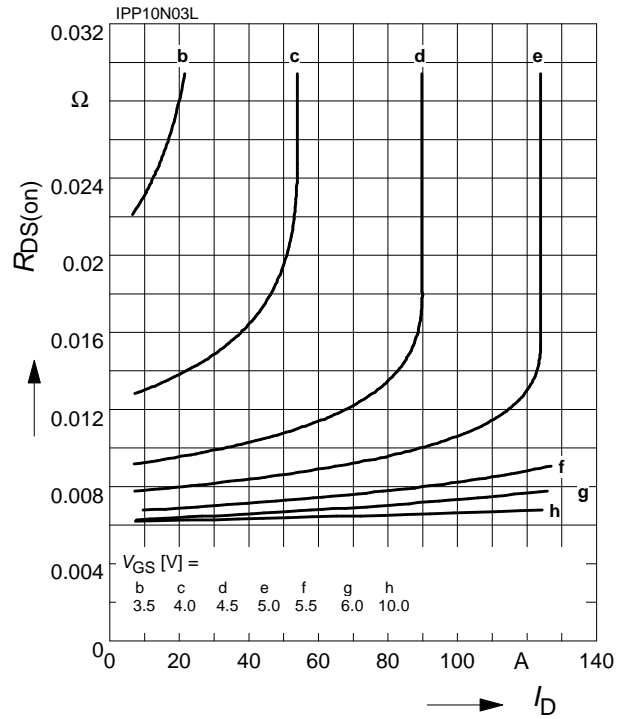


**7 Typ. transfer characteristics**

$I_D = f(V_{GS}); V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$   
parameter:  $t_p = 80 \mu\text{s}$

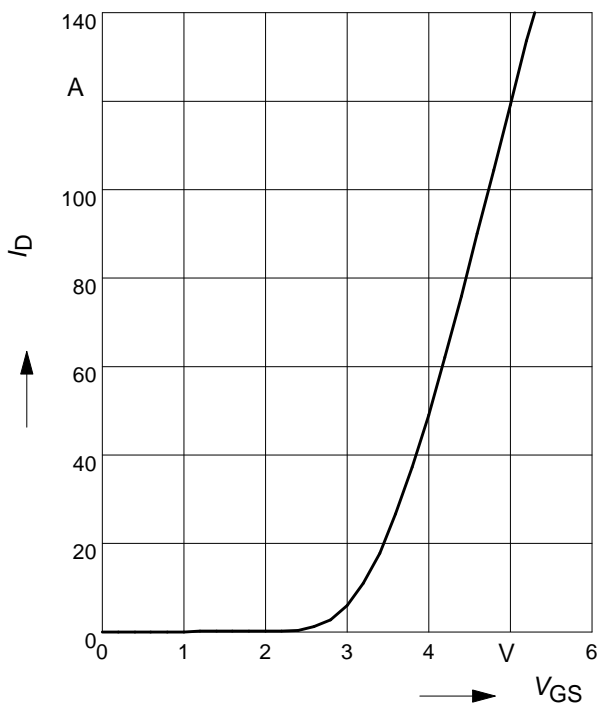

**8 Typ. forward transconductance**


$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$   
parameter:  $g_{fs}$

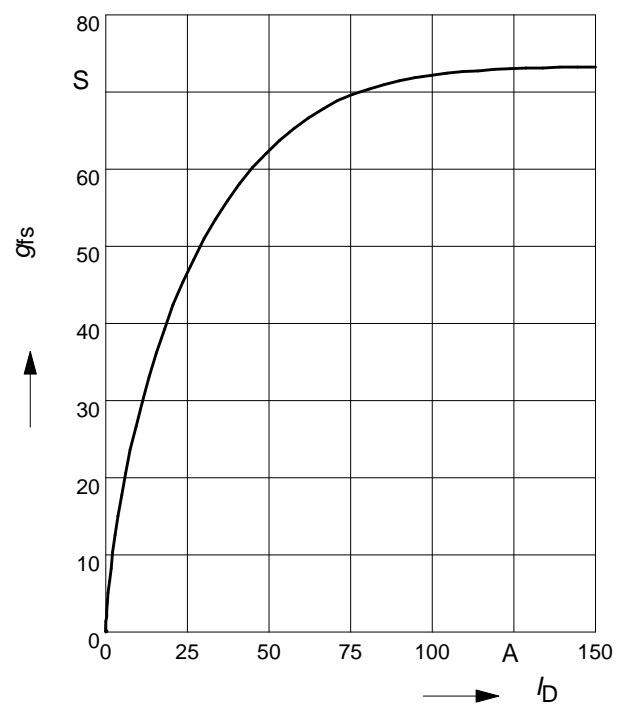

**9 Drain-source on-state resistance**

$$R_{DS(on)} = f(T_j)$$


parameter :  $I_D = 36\text{ A}$ ,  $V_{GS} = 10\text{ V}$

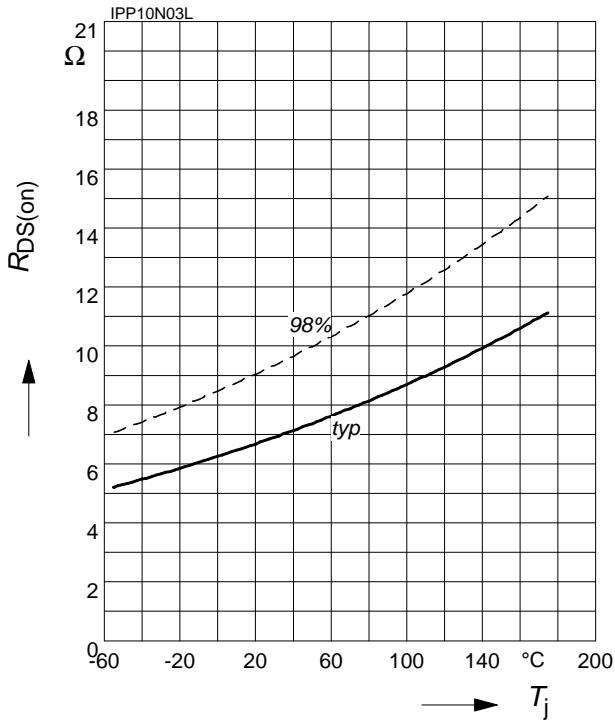

**10 Typ. gate threshold voltage**

$$V_{GS(th)} = f(T_j)$$


parameter:  $V_{GS} = V_{DS}$

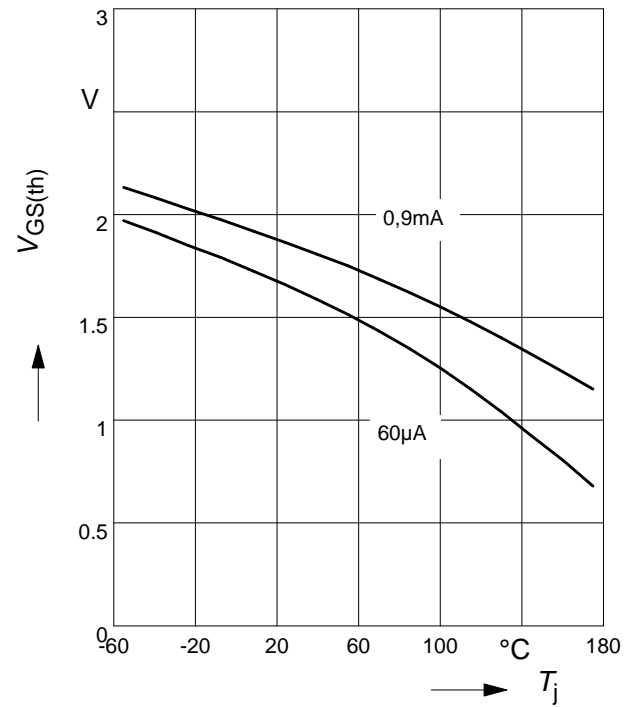

**11 Typ. capacitances**

$$C = f(V_{DS})$$


parameter:  $V_{GS}=0\text{V}$ ,  $f=1\text{ MHz}$

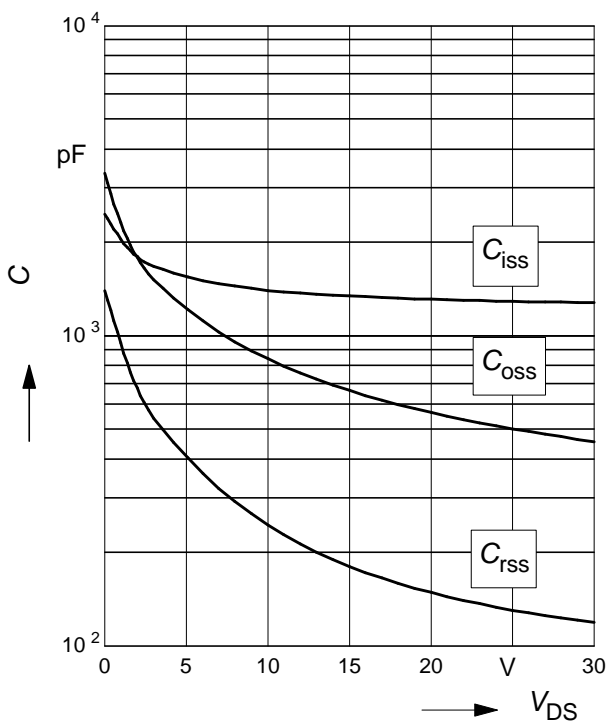

**12 Forward character. of reverse diode**

$$I_F = f(V_{SD})$$


parameter:  $T_j$ ,  $t_p = 80\text{ }\mu\text{s}$

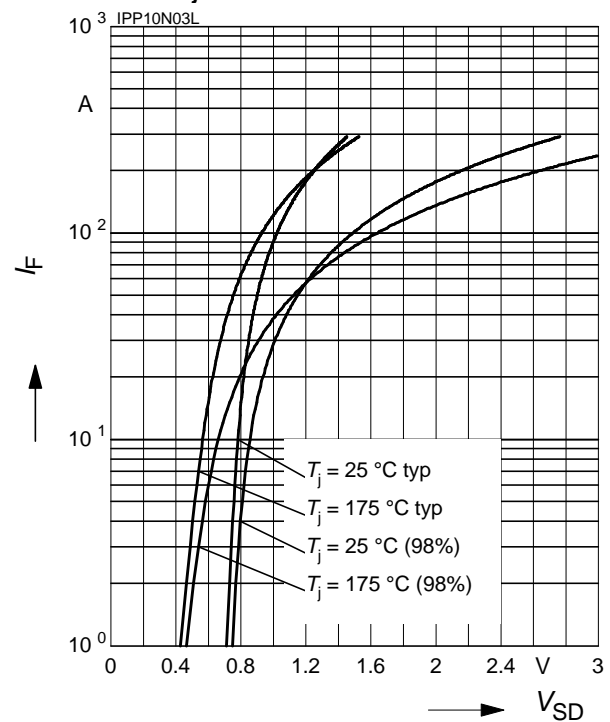

**13 Typ. avalanche energy**

$$E_{AS} = f(T_j)$$


par.:  $I_D = 30\text{ A}$ ,  $V_{DD} = 25\text{ V}$ ,  $R_{GS} = 25\ \Omega$

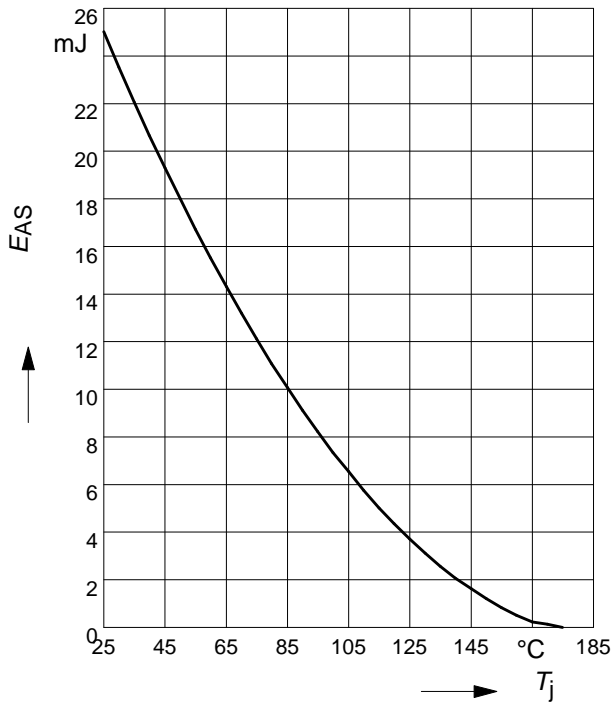

**15 Drain-source breakdown voltage**

$$V_{(BR)DSS} = f(T_j)$$


parameter:  $I_D = 10\text{ mA}$

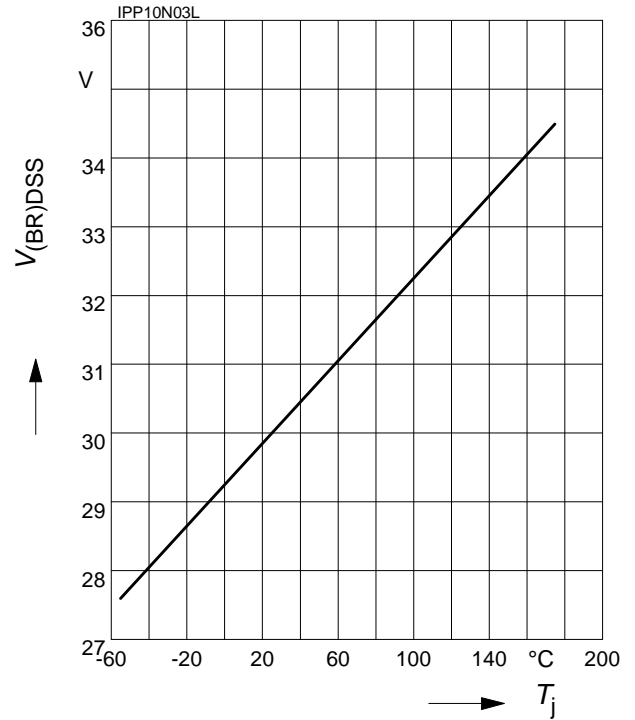

**14 Typ. gate charge**

$$V_{GS} = f(Q_{Gate})$$

parameter:  $I_D = 36\text{ A pulsed}$

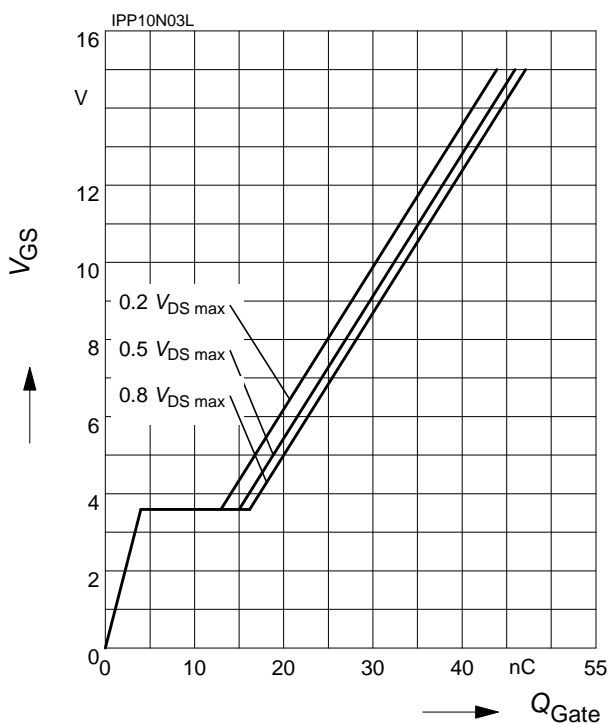

**Published by**  
**Infineon Technologies AG,**  
**Bereichs Kommunikation**  
**St.-Martin-Strasse 53,**  
**D-81541 München**  
**© Infineon Technologies AG 1999**  
**All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.