


**Features**


- Switching-loss rating includes all "tail" losses
- Optimized for medium operating frequency (1 to 10kHz) See Fig. 1 for Current vs. Frequency curve



$V_{CES} = 900V$
$V_{CE(sat)} \leq 2.7V$
@ $V_{GE} = 15V, I_C = 28A$

**Description**

Insulated Gate Bipolar Transistors (IGBTs) from International Rectifier have higher usable current densities than comparable bipolar transistors, while at the same time having simpler gate-drive requirements of the familiar power MOSFET. They provide substantial benefits to a host of high-voltage, high-current applications.



**Absolute Maximum Ratings**

	Parameter	Max.	Units
$V_{CES}$	Collector-to-Emitter Voltage	900	V
$I_C @ T_C = 25^\circ C$	Continuous Collector Current	51	A
$I_C @ T_C = 100^\circ C$	Continuous Collector Current	28	
$I_{CM}$	Pulsed Collector Current ①	100	
$I_{LM}$	Clamped Inductive Load Current ②	100	
$V_{GE}$	Gate-to-Emitter Voltage	$\pm 20$	V
$E_{ARV}$	Reverse Voltage Avalanche Energy ③	20	mJ
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	200	W
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	78	
$T_J$	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	
	Mounting torque, 6-32 or M3 screw.	10 lbf•in (1.1N•m)	

**Thermal Resistance**

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	-----	-----	0.64	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink, flat, greased surface	-----	0.24	-----	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	-----	-----	40	
$Wt$	Weight	-----	6 (0.21)	-----	g (oz)

**Electrical Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**


	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	900	----	----	V	$V_{GE} = 0V, I_C = 250\mu A$
$V_{(BR)ECS}$	Emitter-to-Collector Breakdown Voltage <sup>④</sup>	20	----	----	V	$V_{GE} = 0V, I_C = 1.0A$
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	----	0.74	----	V/ $^\circ\text{C}$	$V_{GE} = 0V, I_C = 1.0mA$
$V_{CE(on)}$	Collector-to-Emitter Saturation Voltage	----	2.1	2.7	V	$I_C = 28A$
		----	2.7	----		$I_C = 51A$
		----	2.4	----		$I_C = 28A, T_J = 150^\circ\text{C}$
$V_{GE(th)}$	Gate Threshold Voltage	3.0	----	5.5		$V_{CE} = V_{GE}, I_C = 250\mu A$
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	----	-9.7	----	mV/ $^\circ\text{C}$	$V_{CE} = V_{GE}, I_C = 250\mu A$
$g_{fe}$	Forward Transconductance <sup>⑤</sup>	12	18	----	S	$V_{CE} = 100V, I_C = 28A$
$I_{CES}$	Zero Gate Voltage Collector Current	----	----	250	$\mu A$	$V_{GE} = 0V, V_{CE} = 900V$
		----	----	2000		$V_{GE} = 0V, V_{CE} = 900V, T_J = 150^\circ\text{C}$
$I_{GES}$	Gate-to-Emitter Leakage Current	----	----	$\pm 100$	nA	$V_{GE} = \pm 20V$

**Switching Characteristics @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**


	Parameter	Min.	Typ.	Max.	Units	Conditions
$Q_g$	Total Gate Charge (turn-on)	----	81	120	nC	$I_C = 28A$
$Q_{ge}$	Gate - Emitter Charge (turn-on)	----	16	24		$V_{CC} = 400V$
$Q_{gc}$	Gate - Collector Charge (turn-on)	----	29	44		$V_{GE} = 15V$
$t_{d(on)}$	Turn-On Delay Time	----	32	----	ns	$T_J = 25^\circ\text{C}$
$t_r$	Rise Time	----	22	----		$I_C = 28A, V_{CC} = 720V$
$t_{d(off)}$	Turn-Off Delay Time	----	200	280		$V_{GE} = 15V, R_G = 5.0\Omega$
$t_f$	Fall Time	----	130	180		Energy losses include "tail"
$E_{on}$	Turn-On Switching Loss	----	1.1	----	mJ	See Fig. 9, 10, 11, 14
$E_{off}$	Turn-Off Switching Loss	----	1.8	----		
$E_{ts}$	Total Switching Loss	----	2.9	4.1		
$t_{d(on)}$	Turn-On Delay Time	----	32	----	ns	$T_J = 150^\circ\text{C},$
$t_r$	Rise Time	----	20	----		$I_C = 28A, V_{CC} = 720V$
$t_{d(off)}$	Turn-Off Delay Time	----	480	----		$V_{GE} = 15V, R_G = 5.0\Omega$
$t_f$	Fall Time	----	450	----		Energy losses include "tail"
$E_{ts}$	Total Switching Loss	----	5.7	----	mJ	See Fig. 10, 14
$L_E$	Internal Emitter Inductance	----	13	----	nH	Measured 5mm from package
$C_{ies}$	Input Capacitance	----	2300	----	pF	$V_{GE} = 0V$
$C_{oes}$	Output Capacitance	----	180	----		$V_{CC} = 30V$
$C_{res}$	Reverse Transfer Capacitance	----	27	----		$f = 1.0MHz$

**Notes:**


- ① Repetitive rating;  $V_{GE}=20V$ , pulse width limited by max. junction temperature. ( See fig. 13b )
- ②  $V_{CC}=80\%(V_{CES}), V_{GE}=20V, L=10\mu H, R_G=5.0\Omega$ , ( See fig. 13a )
- ③ Repetitive rating; pulse width limited by maximum junction temperature.
- ④ Pulse width  $\leq 80\mu s$ ; duty factor  $\leq 0.1\%$ .
- ⑤ Pulse width  $5.0\mu s$ , single shot.

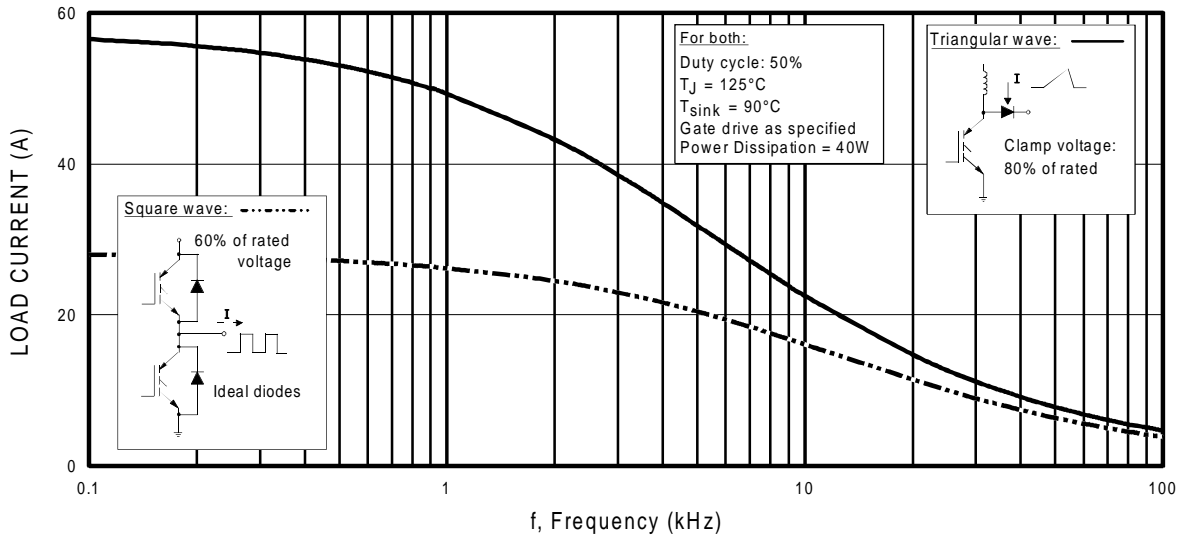


**Fig. 1 - Typical Load Current vs. Frequency**  
 (For square wave,  $I = I_{RMS}$  of fundamental; for triangular wave,  $I = I_{PK}$ )

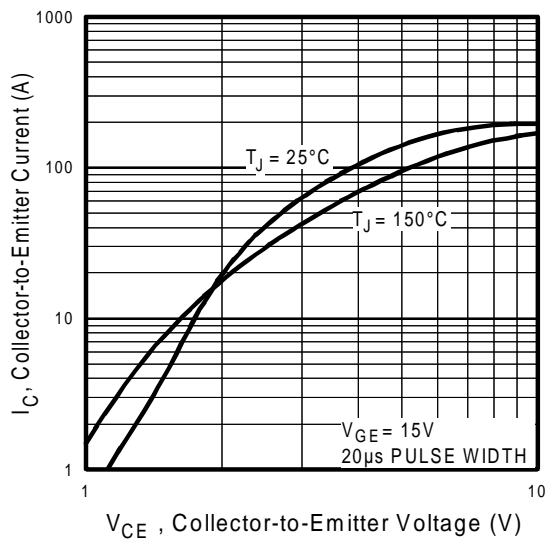


**Fig. 2 - Typical Output Characteristics**

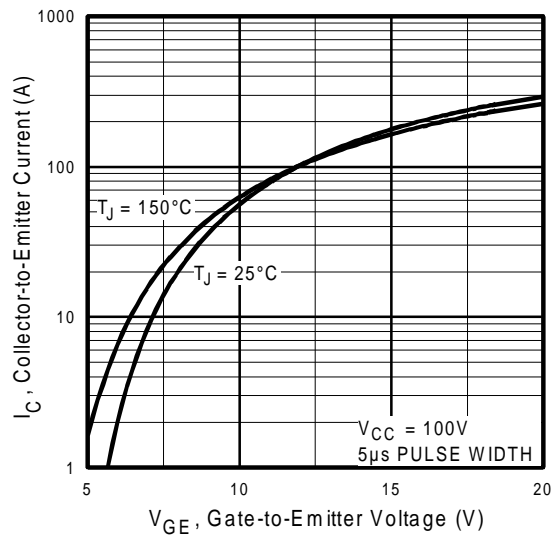


**Fig. 3 - Typical Transfer Characteristics**

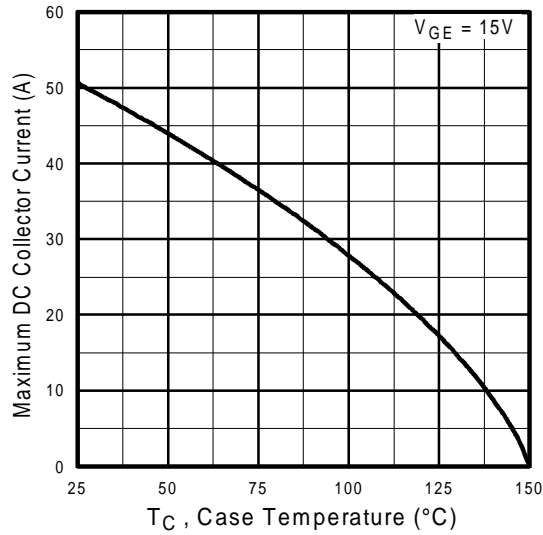


**Fig. 4 - Maximum Collector Current vs. Case Temperature**

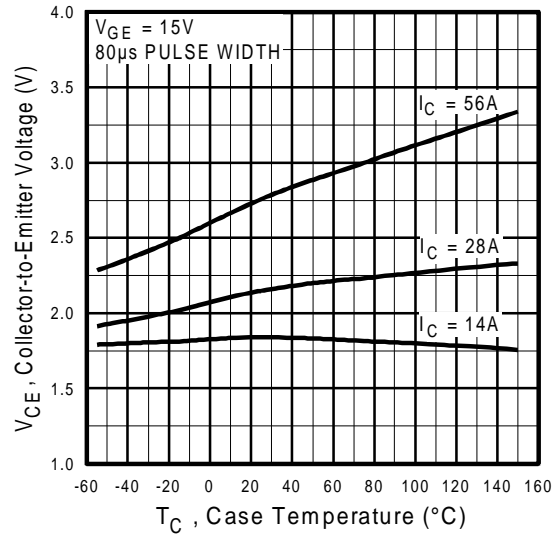


**Fig. 5 - Collector-to-Emitter Voltage vs. Case Temperature**

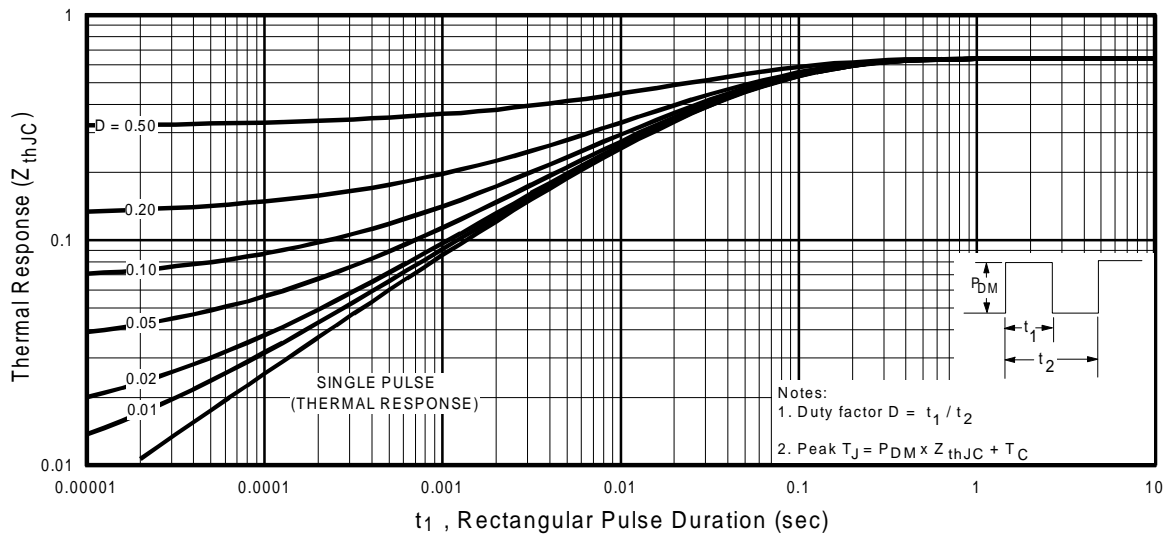


**Fig. 6 - Maximum Effective Transient Thermal Impedance, Junction-to-Case**

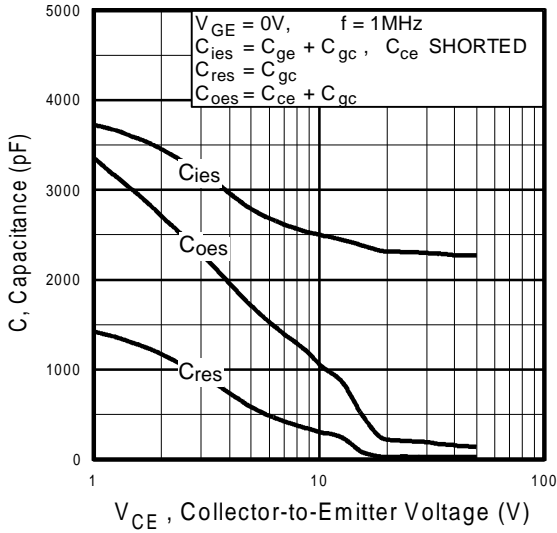


**Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage**

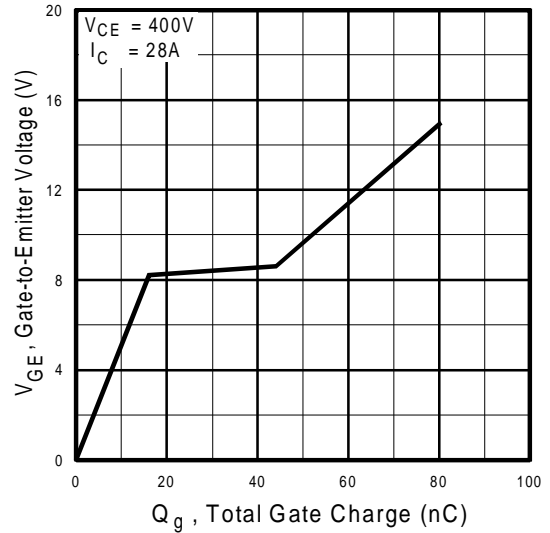


**Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage**

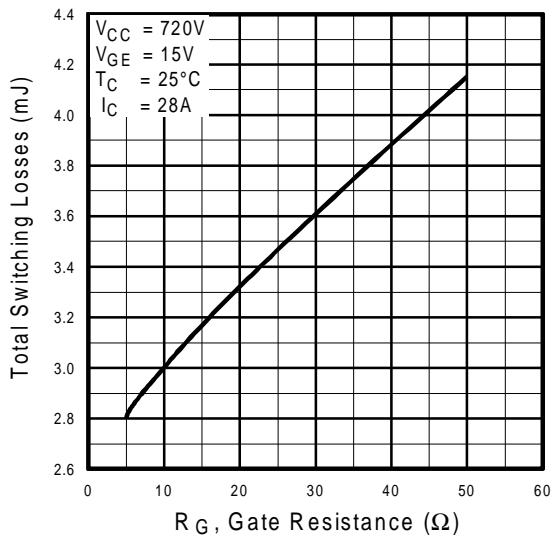


**Fig. 9 - Typical Switching Losses vs. Gate Resistance**

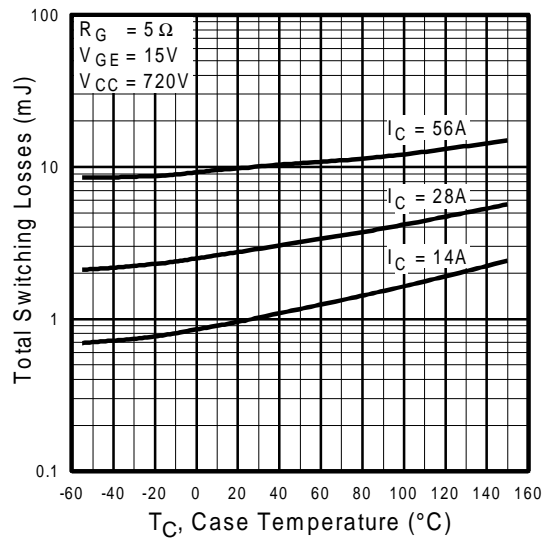

**Fig. 10 - Typical Switching Losses vs. Case Temperature**

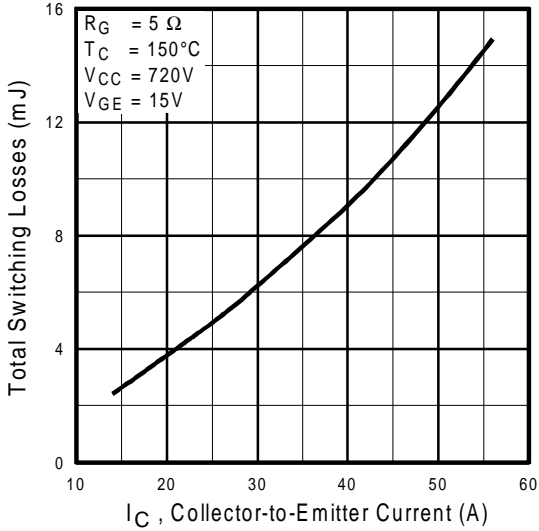

**Fig. 11** - Typical Switching Losses vs. Collector-to-Emitter Current

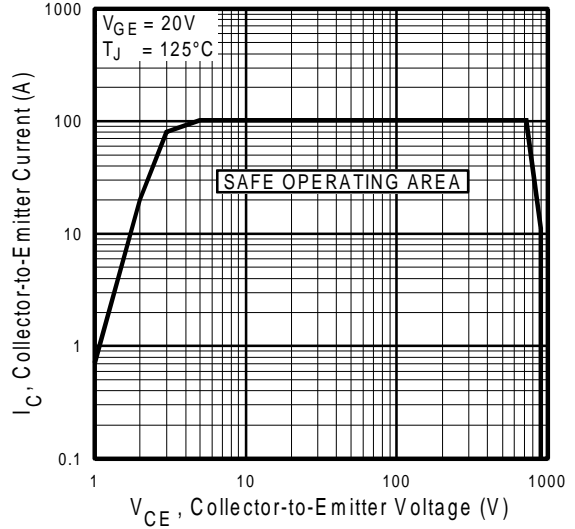

**Fig. 12** - Turn-Off SOA

Refer to **Section D** for the following:

**Appendix F: Section D - page D-8**

- Fig. 13a - Clamped Inductive Load Test Circuit
- Fig. 13b - Pulsed Collector Current Test Circuit
- Fig. 14a - Switching Loss Test Circuit
- Fig. 14b - Switching Loss Waveform

**Package Outline 3 - JEDEC Outline TO-247AC (TO-3P) Section D - page D-13**



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.