


# 2SC2979

SILICON NPN TRIPLE DIFFUSED

**HITACHI** HIGH VOLTAGE, HIGH SPEED AND HIGH POWER SWITCHING

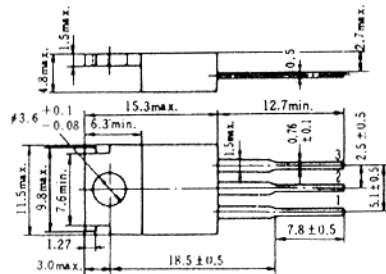

1. Base
  2. Collector (Flange)
  3. Emitter
- (Dimensions in mm)


(JEDEC TO-220AB)

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Item	Symbol	2SC2979	Unit
Collector to base voltage	VCBO	900	V
Collector to emitter voltage	VCEO	800	V
Emitter to base voltage	VEBO	7	V
Collector current	IC	3	A
Collector peak current	ic(peak)	6	A
Base current	IB	1.5	A
Collector power dissipation	PC*	40	W
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C

\* Value at Tc = 25°C

## MAXIMUM COLLECTOR DISSIPATION CURVE

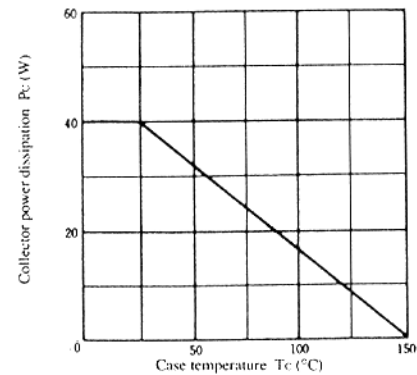


## ■ ELECTRICAL CHARACTERISTICS (Ta=25°C)


Item	Symbol	Test Condition	min.	typ.	max.	Unit
Collector to emitter sustain voltage	VCEO(sus)	IC = 0.2A, RBE = ∞, L = 100mH	800	—	—	V
	VCEX(sus)	IC = 3A, IB1 = 0.9A, IB2 = -0.6A, VBE = -5.0V, L = 180μH, Clamped	800	—	—	V
Emitter to base breakdown voltage	V(BR)EBO	IE = 10mA, IC = 0	7	—	—	V
Collector cutoff current	ICBO	VCE = 750V, IE = 0	—	—	100	μA
	ICEO	VCE = 650V, RBE = ∞	—	—	100	μA
DC current transfer ratio	hFE1	VCE = 5V, IC = 0.3A*	15	—	—	
	hFE2	VCE = 5V, IC = 1.5A*	7	—	—	
Collector to emitter saturation voltage	VCE(sat)	IC = 0.75A, IB = 0.15A*	—	—	1.0	V
Base to emitter saturation voltage	VBE(sat)		—	—	1.5	V
Turn on time	ton	IC = 1.5A, IB1 = 0.3A, IB2 = -0.75A, VCC ≈ 250V	—	—	1.0	μs
Storage time	toff		—	—	3.0	μs
Fall time	tr		—	—	1.0	μs

\* Pulse Test


AREA OF SAFE OPERATION

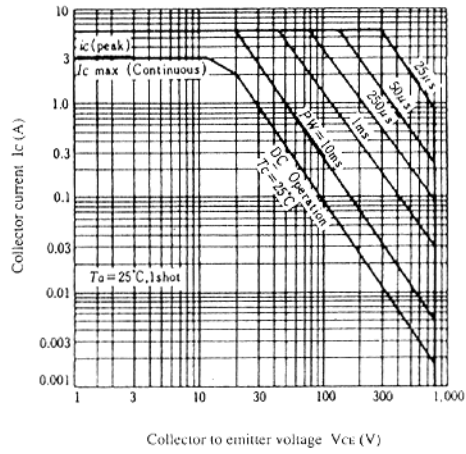


COLLECTOR CURRENT DERATING RATE

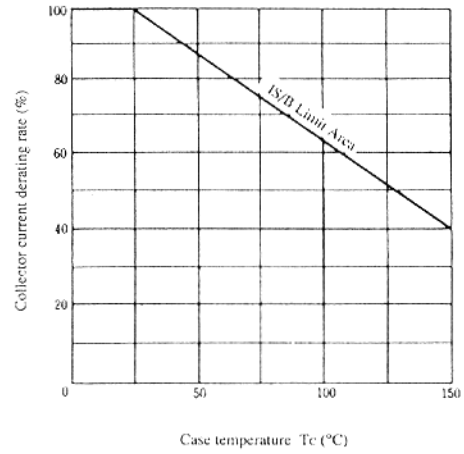


TRANSIENT THERMAL RESISTANCE

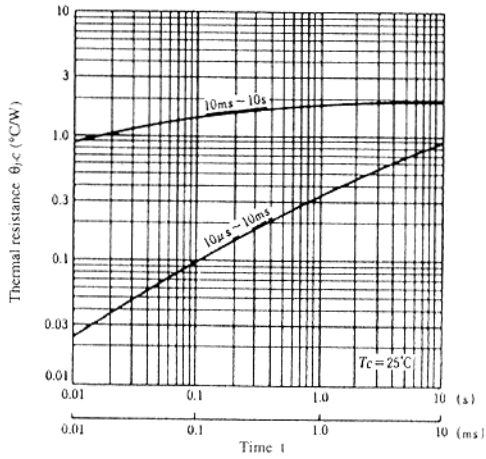


REVERSE BIAS AREA OF SAFE OPERATION

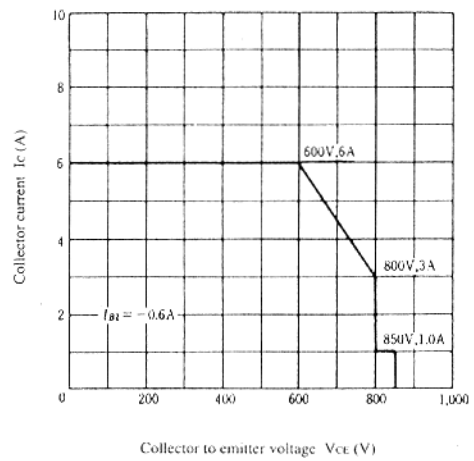


COLLECTOR TO EMITTER VOLTAGE VS. BASE TO EMITTER RESISTANCE

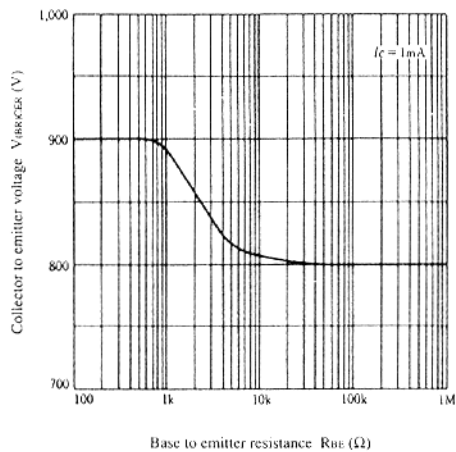


TYPICAL OUTPUT CHARACTERISTICS

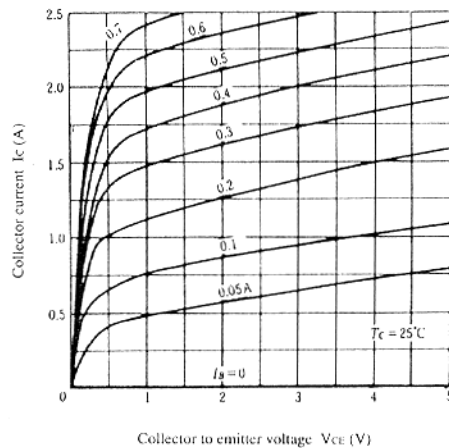


TYPICAL TRANSFER CHARACTERISTICS

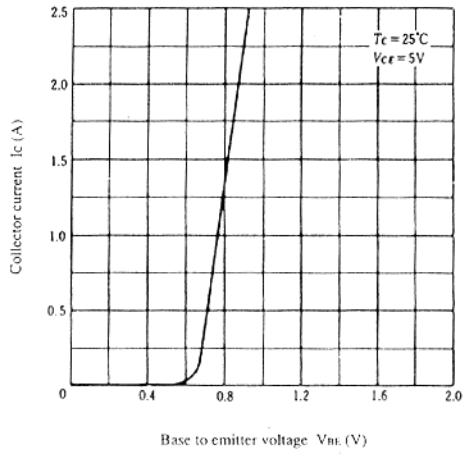


DC CURRENT TRANSFER RATIO VS. COLLECTOR CURRENT

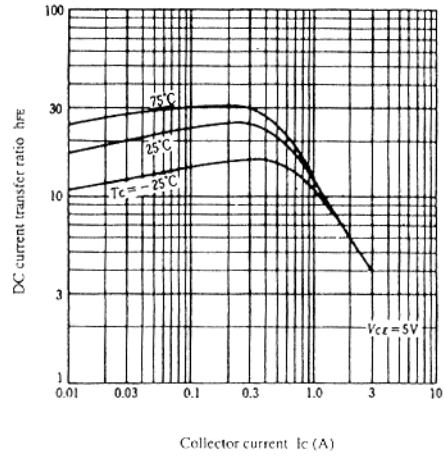


COLLECTOR TO EMITTER SATURATION VOLTAGE VS. BASE CURRENT

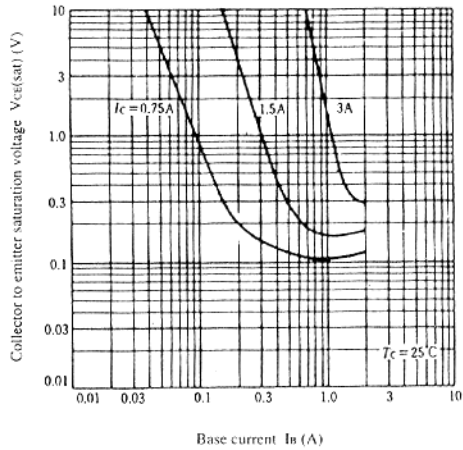

SATURATION VOLTAGE VS. COLLECTOR CURRENT

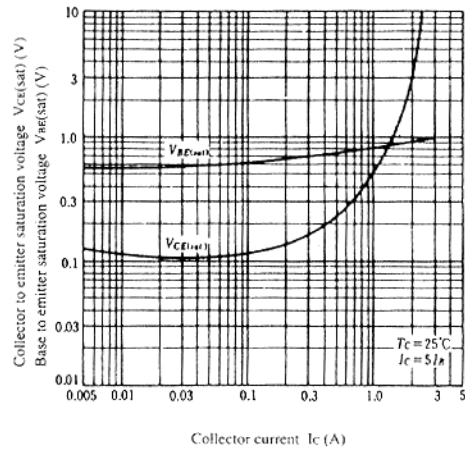

SWITCHING TIME VS. COLLECTOR CURRENT

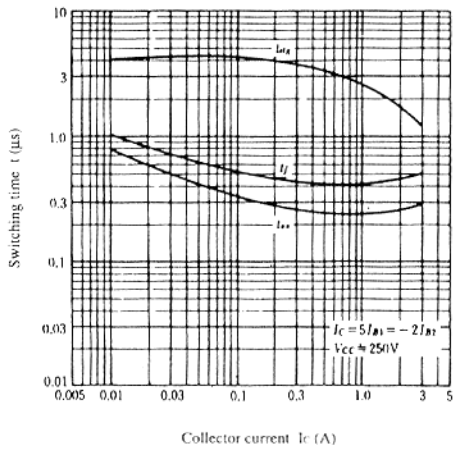

SWITCHING TIME VS. CASE TEMPERATURE

