

## NPN HIGH POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/518

### Devices

2N3771

2N3772

### Qualified Level


JANTX  
JANTXV

### MAXIMUM RATINGS

Ratings	Symbol	2N3771	2N3772	Unit
Collector-Emitter Voltage	$V_{CEO}$	40	60	Vdc
Collector-Base Voltage	$V_{CBO}$	50	100	Vdc
Emitter-Base Voltage	$V_{EBO}$	7.0	7.0	Vdc
Base Current	$I_B$	7.5	5.0	Adc
Collector Current	$I_C$	30	20	Adc
Total Power Dissipation	$P_T$	@ $T_A = +25^{\circ}C$ <sup>(1)</sup>	6.0	W
		@ $T_C = +25^{\circ}C$ <sup>(2)</sup>	150	W
Operating & Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +200		$^{\circ}C$

1) Derate linearly 34.2 mW/ $^{\circ}C$  for  $T_A > +25^{\circ}C$

2) Derate linearly 857 mW/ $^{\circ}C$  for  $T_C > +25^{\circ}C$

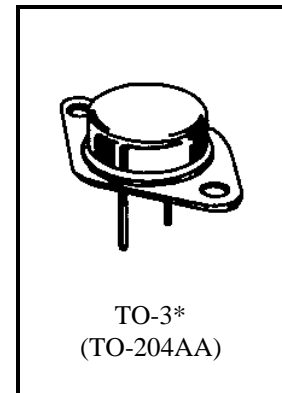

\*See Appendix A for Package Outline

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
<b>OFF CHARACTERISTICS</b>				
Collector-Base Breakdown Voltage $I_C = 200$ mAdc	2N3771 2N3772	$V_{(BR)CEO}$	40 60	Vdc
Collector-Emitter Breakdown Voltage $I_C = 200$ mAdc, $R_{BE} = 100 \Omega$	2N3771 2N3772	$V_{(BR)CER}$	45 70	Vdc
Collector-Emitter Breakdown Voltage $I_C = 200$ mAdc, $V_{BE} = -1.5$ Vdc	2N3771 2N3772	$V_{(BR)CEX}$	50 90	Vdc
Collector-Emitter Cutoff Current $V_{CE} = 30$ Vdc $V_{CE} = 50$ Vdc	2N3771 2N3772	$I_{CEO}$	5.0 5.0	mAdc
Emitter-Base Cutoff Current $V_{BE} = 7.0$ Vdc	2N3771 2N3772	$I_{EBO}$	2.0	mAdc
Collector-Emitter Cutoff Current $V_{BE} = 1.5$ Vdc, $V_{CE} = 50$ Vdc $V_{BE} = 1.5$ Vdc, $V_{CE} = 100$ Vdc	2N3771 2N3772	$I_{CEX}$	500 500	$\mu$ Adc

**2N3771, 2N3772 JAN SERIES**

**ELECTRICAL CHARACTERISTICS (con't)**

Characteristics		Symbol	Min.	Max.	Unit
<b>ON CHARACTERISTICS <sup>(3)</sup></b>					
Forward-Current Transfer Ratio		$h_{FE}$			
$I_C = 15 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N3771		15	60	
$I_C = 10 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N3772		15	60	
$I_C = 1.0 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	Both		40	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			
$I_C = 15 \text{ Adc}, I_B = 1.5 \text{ Adc}$	2N3771			1.5	Vdc
$I_C = 30 \text{ Adc}, I_B = 6.0 \text{ Adc}$	2N3771			4.0	
$I_C = 10 \text{ Adc}, I_B = 1.0 \text{ Adc}$	2N3772			1.2	
$I_C = 20 \text{ Adc}, I_B = 4.0 \text{ Adc}$	2N3772			4.0	
Base-Emitter Voltage (non-saturated)		$V_{BE}$			
$I_C = 15 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N3771			2.3	Vdc
$I_C = 10 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N3772			2.0	

**DYNAMIC CHARACTERISTICS**

Small-Signal Cutoff Frequency		$h_{fe}$	40		
$I_C = 1.0 \text{ Adc}, V_{CE} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward-Current Transfer		$ h_{fe} $	6.0	30	
$I_C = 1.0 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}, f = 100 \text{ kHz}$					
Output Capacitance		$C_{obo}$		1200	$p^f$
$V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$					

**SWITCHING CHARACTERISTICS**

Turn-On Time		$t_{on}$			
$V_{CC} = 30 \text{ Vdc}; I_C = 15 \text{ Adc}; I_{B1} = 1.5 \text{ Adc}$	2N3771		10	$\mu s$	
$V_{CC} = 30 \text{ Vdc}; I_C = 10 \text{ Adc}; I_{B1} = 1.0 \text{ Adc}$	2N3772		8.0		
Turn-Off Time		$t_{off}$			
$V_{CC} = 30 \text{ Vdc}; I_C = 15 \text{ Adc}; I_{B1} = 1.5 \text{ Adc}; I_{B2} = -1.5 \text{ Adc}$	2N3771		12	$\mu s$	
$V_{CC} = 30 \text{ Vdc}; I_C = 10 \text{ Adc}; I_{B1} = 1.0 \text{ Adc}; I_{B2} = -1.0 \text{ Adc}$	2N3772		10		

**SAFE OPERATING AREA**

<b>DC Tests</b>	
$T_C = +25^\circ C, 1 \text{ Cycle}, t = 1.0 \text{ s}$	
<b>Test 1 (2N3771 only)</b>	
$V_{CE} = 5.0 \text{ Vdc}, I_C = 30 \text{ Adc}$	
<b>Test 2 (2N3771 only)</b>	
$V_{CE} = 40 \text{ Vdc}, I_C = 3.75 \text{ Adc}$	
<b>Test 3 (2N3772 only)</b>	
$V_{CE} = 7.5 \text{ Vdc}, I_C = 20 \text{ Adc}$	
<b>Test 4 (2N3772 only)</b>	
$V_{CE} = 60 \text{ Vdc}, I_C = 2.5 \text{ Adc}$	
<b>Clamped Inductive</b>	
$T_A = +25^\circ C; \text{duty cycle} \leq 10\%; R_S = 0.1 \Omega$	
<b>Test 1 (2N3771 only)</b>	
$R_{BB1} = 2.0 \Omega; V_{BB1} \leq 14 \text{ Vdc}; R_{BB2} = 100 \Omega; V_{CC} = 20 \pm 5.0 \text{ Vdc}; V_{BB2} = 1.5 \text{ Vdc}; I_C = 30 \text{ Adc}; R_L \leq 0.67 \Omega; L = 5.0 \text{ mH}$	
<b>Test 2 (2N3772 only)</b>	
$R_{BB1} = 2.0 \Omega; V_{BB1} \leq 10 \text{ Vdc}; R_{BB2} = 100 \Omega; V_{CC} = 40 \pm 5.0 \text{ Vdc}; V_{BB2} = 1.5 \text{ Vdc}; I_C = 20 \text{ Adc}; R_L \leq 2.0 \Omega; L = 5.0 \text{ mH}$	

(3) Pulse Test: Pulse Width = 300 $\mu s$ , Duty Cycle  $\leq 2.0\%$ .



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.