

NPN LOW POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/253

Devices

2N930

Qualified Level

**JAN
JANTX
JANTXV**

MAXIMUM RATINGS


Ratings	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	45	Vdc
Collector-Base Voltage	V_{CBO}	60	Vdc
Emitter-Base Voltage	V_{EBO}	6.0	Vdc
Collector Current	I_C	30	mAdc
Total Power Dissipation @ $T_A = +25^{\circ}\text{C}^{(1)}$ @ $T_C = +25^{\circ}\text{C}^{(2)}$	P_T	300 600	mW
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-55 to +200	$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	97	$^{\circ}\text{C}/\text{W}$

1) Derate linearly 2.0 mW/ $^{\circ}\text{C}$ above $T_A = +25^{\circ}\text{C}$

2) Derate linearly 4.0 mW/ $^{\circ}\text{C}$ above $T_C = +25^{\circ}\text{C}$

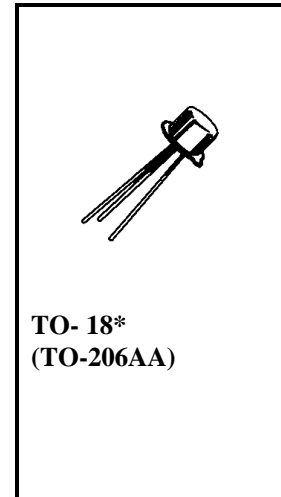

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_C = +25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 10 \text{ mAdc}$	$V_{(BR)CEO}$	45		Vdc
Collector-Base Cutoff Current $V_{CB} = 60 \text{ Vdc}$ $V_{CB} = 45 \text{ Vdc}$	I_{CBO}		10 10	μAdc ηAdc
Emitter-Base Cutoff Current $V_{EB} = 6.0 \text{ Vdc}$ $V_{EB} = 5.0 \text{ Vdc}$	I_{EBO}		10 5.0	μAdc ηAdc
Collector-Emitter Cutoff Current $V_{CE} = 45 \text{ Vdc}$	I_{CES}		2.0	ηAdc
Collector-Base Cutoff Current $V_{CE} = 5.0 \text{ Vdc}$	I_{CEO}		2.0	ηAdc

2N930, JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
DC CHARACTERISTICS ⁽³⁾				
Forward-Current Transfer Ratio I _C = 10 μAdc, V _{CE} = 5.0 Vdc I _C = 500 μAdc, V _{CE} = 5.0 Vdc I _C = 10 mAdc, V _{CE} = 5.0 Vdc	h _{FE}	100 150	300 600	
Collector-Emitter Saturation Voltage I _C = 10 mAdc, I _B = 0.5 mAdc	V _{CE(sat)}		1.0	Vdc
Base-Emitter Saturation Voltage I _C = 10 mAdc, I _B = 0.5 mAdc	V _{BE(sat)}	0.6	1.0	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Small-Signal Short-Circuit Forward Current Transfer Ratio I _C = 500 μAdc, V _{CE} = 5.0 Vdc, f = 30 MHz	h _{fe}	1.5	6.0	
Small-Signal Short-Circuit Forward Current Transfer Ratio I _C = 1.0 mAdc, V _{CE} = 5.0 Vdc, f = 1.0 kHz	h _{fe}	150	600	
Small-Signal Short-Circuit Input Impedance V _{CB} = 5.0 Vdc, I _E = 1.0 mAdc, f = 1.0 kHz	h _{ib}	25	32	Ω
Small-Signal Short-Circuit Output Admittance V _{CB} = 5.0 Vdc, I _E = 1.0 mAdc, f = 1.0 kHz	h _{ob}		1.0	μΩ
Output Capacitance V _{CB} = 5.0 Vdc, I _E = 0, 100 kHz ≤ f ≤ 1.0 MHz	C _{obo}		8.0	pF
Noise Figure V _{CE} = 5 Vdc; I _C = 10 μAdc; R _g = 10kΩ Test 1: f = 100 Hz Test 2: f = 1.0 kHz Test 3: f = 10 kHz	NF		5 3 3	dB

(3) Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.