


4 IN PUT A/V SWITCH

The KA2192 is audio/video 4 input switching IC in the video system for S-VHS(Super-Video Home System).

This device can select audio/video signal of each different 4 kinds input.

This device separates Y(luminance) and C(chroma) for S-VHS.

30-SDIP-400

**FUNCTION**

- Two input decoder
- Mode selector
- 4 * 1 switch
- Mute switch
- Bias stage
- Gain switch (6dB or 8dB)
- Clamp circuit
- TV polarity switch
- 2 * 1 switch
- Pulse generator
- Switching part for selecting channel


ORDERING INFORMATION

Device	Package	Operating Temperature
KA2192	30-SDIP-400	-20~+65°C

FEATURE

- Independent and stable bias block to prohibit cross talk of and source.
- Available the mode output.
- TV polarity switch can select negative and positive video signal to switch conditions.
- Clamp block for stabile video signal.
- Switch for to control signal gain (6dB or 8dB).
- Separation and Processing of Y(luminance) and C(chroma) for S-VHS video.

BLOCK DIAGRAM

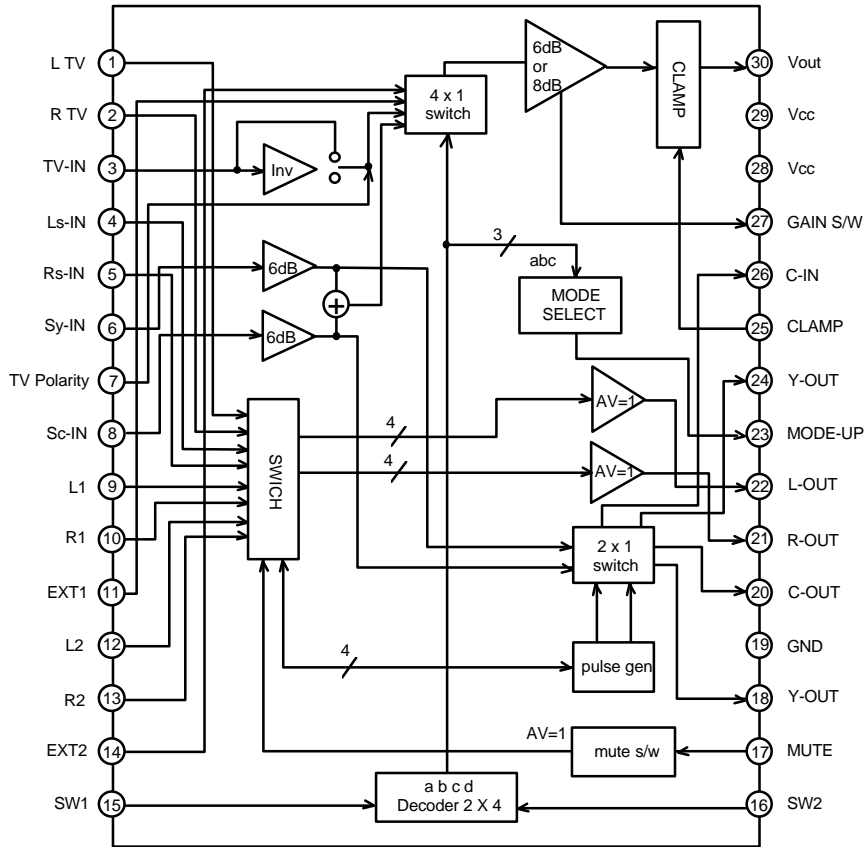

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CCmax}	15	V
Input Terminal Signal Voltage	V_{Smax}	3	Vp-p
Input Terminal Voltage	V_{INmax}	GND-0.3~VCC+0.3V	-
Power Dissipation	P_{Dmax}	1.6	W
Operating Temperature	T_{OPR}	-20~+70	°C
Storage Temperature	T_{STG}	-55~+150	°C

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}C$)**ELECTRICAL CHARACTERISTICS**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Current	I_{CC}	$V_{CC}=9V$	21	32	43	mA
Input	V_{DY}	15KHz	1.7	2.2	-	VP-P
	V_{DY}^Y		5.5	6.5	-	
Dynamic Range	V_{DY}^S	Sine Wave	1.9	2.4	-	dB
	G_V		5.6	6.0	7.0	
Video Gain	ΔG_V	15 KHz	0.5	2.0	2.5	dB
	G_{YC}	1V _{P.P}	-0.2	0	0.5	
	G_{DY}^S	Sine Wave	5.0	6.0	7.0	
Video Crosstalk	C_M	4.45 KHz	50	64	-	
Y and C Crosstalk	C_{YC}	1Vp-p Sine Wave	50	64	-	

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Frequency Width	f_M	1V _{P-P}	10	24	-	MHz
	f_{YC}	Sine Wave	10	39	-	
	f_{YC}		10	24	-	
Clamp Level	C_L	PAL TV Signal	-	21	50	%
Sound Dynamic Range	V_{DY}	1 KHz 1V _{P-P}	5	6	-	V _{P-P}
Sound Gain	G_A	Sine Wave	-0.5	0	0.5	dB
Sound Frequency Characteristics	f_A	1V _{P-P} Sine Wave	100	-	-	KHz
Source Crosstalk	C_A	1 KHz 1V _{P-P}	60	72	-	dB
Source and Channel Crosstalk	C_{LR}	Sine Wave	60	72	-	
Sound Mute Attenuation	M_A		60	75	-	dB
SW 1 Threshold VTG	V_{TH1}		1.0	2.0	3.0	V
SW 2 Threshold VTG	V_{TH2}		1.0	2.0	3.0	
Sound Mute Treshold VTG	V_{THM}		1.3	2.3	3.3	
TV Polarity s/w Threshold	V_{THP}		-	4.0	-	
Mode Output Voltage	V_M		-	0	0.2	V
	V_M		1.7	2.0	2.3	
	V_M		3.7	4.0	4.5	

ELECTRICAL CHARACTERISTICS(Contiued)



TV
E
S

OPERATING PRINCIPLE

① In-output truth table of A/V switching IC for input switch conditions.

SW INPUT		DECODER OUT				WOUND OUT		VIDEO OUT	Y & C OUT		CODE OUT
SW1	SW2	A	B	C	D	L-OUT	R-OUT	V-OUT	Y OUT	C OUT	MODE OUT
L	L	H	L	L	L	EXT2	EXT2	EXT2	-	-	2(V)
H	L	L	H	L	L	EXT1	EXT1	EXT1	-	-	2(V)
H	H	L	L	H	L	TV	TV	TV	-	-	0(V)
L	H	L	L	L	H	SUPER	SUPER	SUPER	S-Y	S-C	4(V)
L:0(V) H:5(V)		L:0.8(V) H:2.1(V)				SOUND MUTE S/W =HIGH[5] :SOUND OFF		TV POLARITY SW=H $A_V = -1$ GAIN SW =H: 8dB	IF SW1(L) SW2(H) S-Y & S-C OUT		FROM EXT1,2: 2[V] TV:0[V] S-VHS: 4[V]

② Sound mute switch

MUTEIN	SOUND-OUT	
	L-OUT	R-OUT
H [5V]	OFF	OFF
L [0V]	ON	ON


③ Gain switch

GAIN SWITCH	6dB OR 8 dB
H [5V]	8dB
L [0V]	6dB

④ TV polarity switch

TV POLARITY SWITCH	A_V
H [V_{CC}]	$A_V = -1$
L [GND]	$A_V = 1$

TEST CIRCUIT

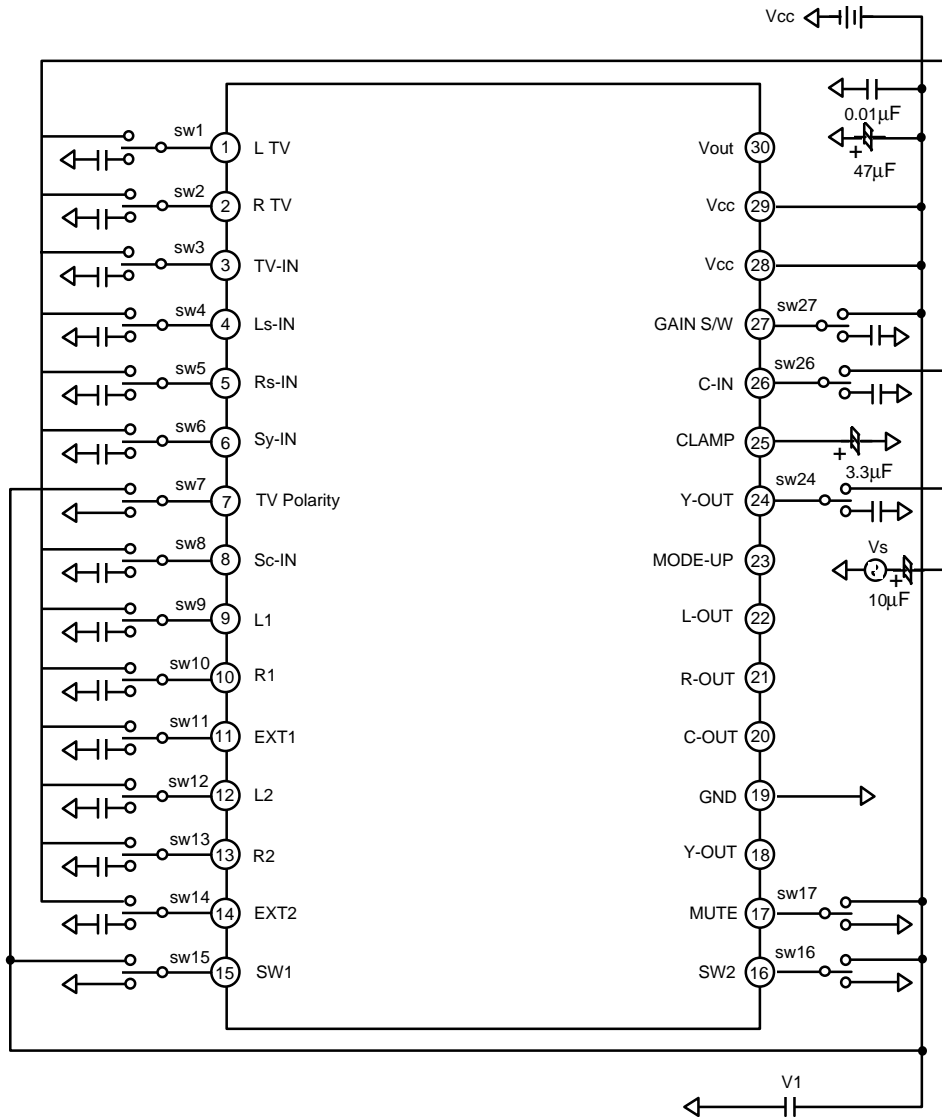



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.