


# MICRO ELECTRONICS

CL2102  
NPN  
SILICON  
TRANSISTOR

## DESCRIPTION

CL2102 is planar transistor use for in AF medium power drivers and outputs and switching applications.

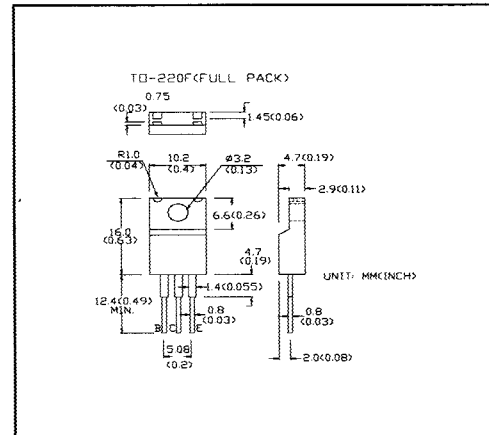

## ABSOLUTE MAXIMUM RATINGS

Collector-Base Voltage	VCBO	120V
Collector-Emitter Voltage	VCEO	65V
Emitter-Base Voltage	VEBO	7V
Collector Current	IC	1A
Total Power Dissipation	Ptot	1W
Operating Junction & Storage Temperature	Tj, Tstg	-55 to +150°C

## ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	MAX	UNIT	CONDITIONS
Collector-Base Breakdown Voltage	BVCBO	120		V	IC=0.1mA IE=0
Collector-Emitter Breakdown Voltage	LVCEO*	65			IC=10mA IB=0
Emitter-Base Breakdown Voltage	BVEBO	7			IC=0.1mA IC=0
Collector Cutoff Current	ICBO		2		VCB=60V IE=0
Emitter Cutoff Current	IEBO		5		VEB=5V IC=0
D.C. Current Gain	HFE*	20			IC=0.1mA VCE=10V
		35			IC=10mA VCE=10V
		40	120		IC=150mA VCE=10V
		25			IC=500mA VCE=10V
		10			IC=1A VCE=10V
Collector-Emitter Saturation Voltage	VCE(sat)*		0.5	V	IC=150mA IB=15mA
Base-Emitter Saturation Voltage	VBE(sat)*		1.1	V	IC=150mA IB=15mA
Gain Bandwidth Product	fT	60		MHz	IC=50mA VCE=10V f=20MHz
Output Capacitance	Cob		10	pF	VCB=10V f=1MHz
Input Capacitance	Cib		80	pF	VEB=0.5V f=1MHz

\* Pulse test : pulse width <300μS, duty cycle < 2%.



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.