

TRANSISTOR MODULE (THREE PHASES BRIDGE TYPE)

QF30AA40/60

TOP





QF30AA is six pack Darlington power transistor module which has six transistors connected in three phase bridge configuration. Each transistor has a reverse paralleled fast recovery diode. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction.

- $I_C=30A$, $V_{CEX}=400/600V$
- Low saturation voltage for higher efficiency.
- High DC current gain h_{FE}
- Isolated mounting base
- V_{EBO} 10V for faster switching speed.

(Applications)

Motor Control (VWVF), AC Servo, UPS

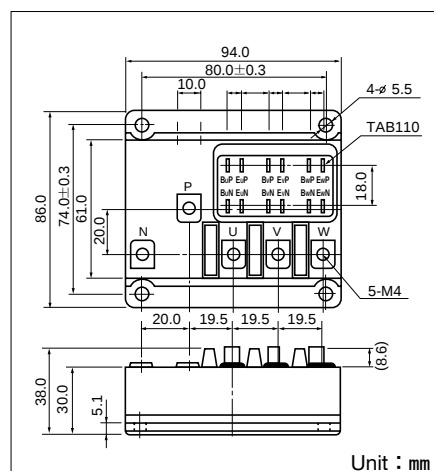

Maximum Ratings


($T_j=25^\circ C$ unless otherwise specified)

Symbol	Item		Conditions	Ratings		Unit
				QF30AA40	QF30AA60	
V _{CBO}	Collector-Base Voltage			400	600	V
V _{CEX}	Collector-Emitter Voltage		V _{BE} =−2V	400	600	V
V _{EBO}	Emitter-Base Voltage			10		V
I _C	Collector Current		() =pw≤1ms	30 (60)		A
−I _C	Reverse Collector Current			30		A
I _B	Base Current			2		A
P _T	Total power dissipation		T _C =25℃	250		W
T _J	Junction Temperature			−40 to +150		℃
T _{stg}	Storage Temperature			−40 to +125		℃
V _{iso}	Isolation Voltage		A.C.1minute	2500		V
	Mounting Torque	Mounting (M6)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)		N·m (kgf·cm)
		Terminal (M4)	Recommended Value 1.0-1.4 (10-14)	1.5 (15)		
	Mass		Typical Value	400		g


Electrical Characteristics

Symbol	Item		Conditions	Ratings		Unit
				Min.	Max.	
IcBO	Collector Cut-off Current		V _{CB} =V _{CBO}		1.0	mA
IeBO	Emitter Cut-off Current		V _{EB} =V _{EBO}		300	mA
V _{CEO(SUS)}	Collector Emitter Sustaning Voltage	QF30AA40	I _C =1A	300		V
		QF30AA60		450		
V _{CEX(SUS)}		QF30AA40	I _C =6A, I _{B2} =−5A	400		V
		QF30AA60		600		
h _{FE}	DC Current Gain		I _C =30A, V _{CE} =2V	75		
			I _C =30A, V _{CE} =5V	100		
V _{CE(sat)}	Collector-Emitter Saturation Voltage		I _C =30A, I _B =0.4A		2.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage		I _C =30A, I _B =0.4A		2.5	V
ton	Switching Time	On Time	V _{CC} =300V, I _C =30A I _{B1} =0.6A, I _{B2} =−0.6A		1.0	μs
ts		Storage Time			12.0	
tf		Fall Time			2.0	
V _{ECO}	Collector-Emitter Reverse Voltage		−I _C =30A		1.4	V
R _{th(j-c)}	Thermal Impedance (junction to case)		Transistor part		0.5	°C/W
			Diode part		1.6	


D.C. Current Gain

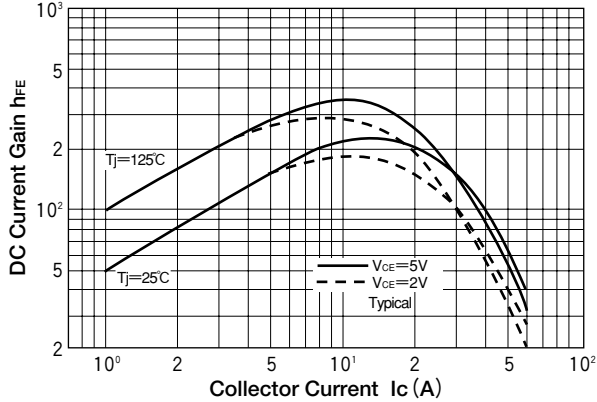


Saturation Characteristics

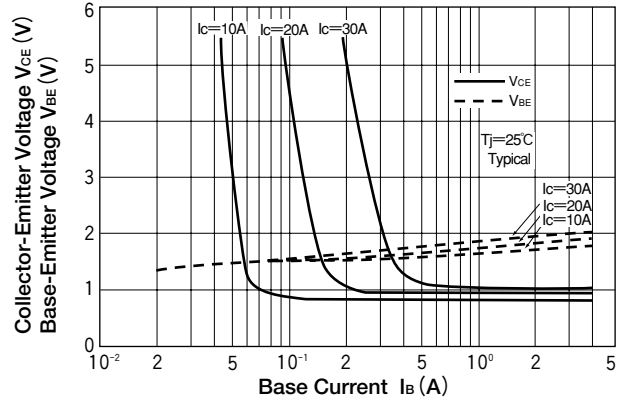


Forward Bias Safe Operating Area

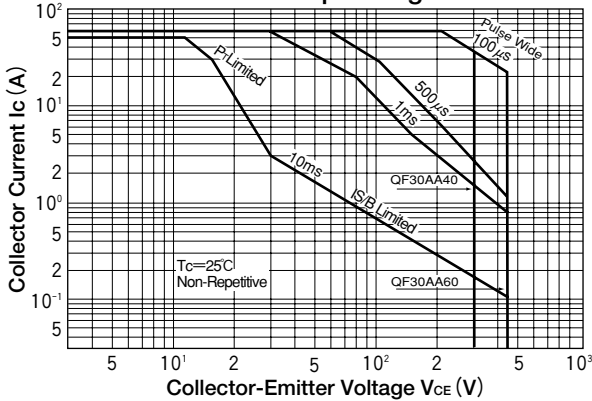


Reverse Bias Safe Operating Area

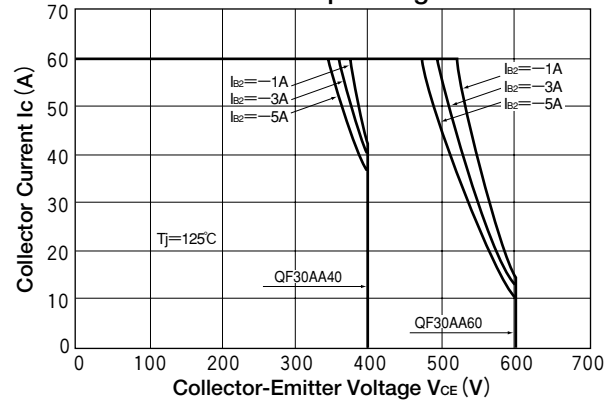


Collector Current Derating Factor

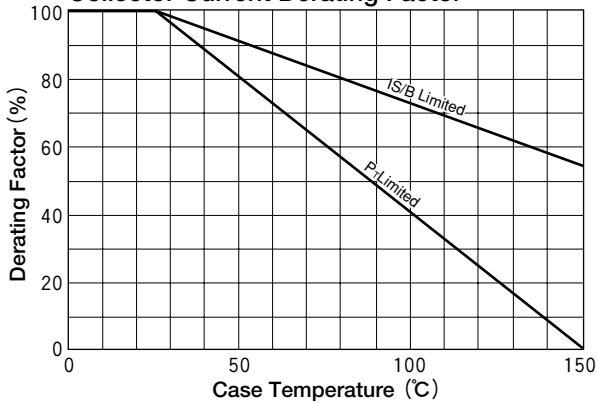

Forward Voltage of Free Wheeling Diode

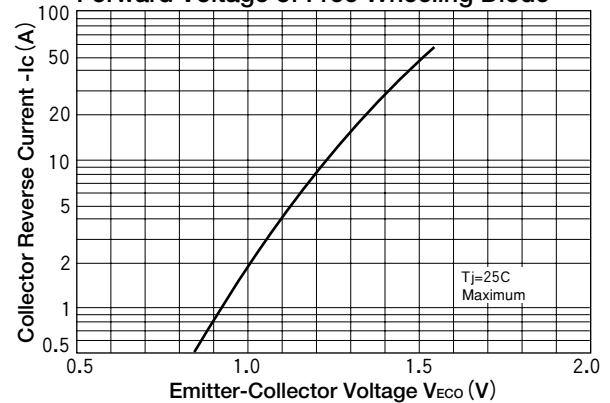

Collector Current Vs Switching Time

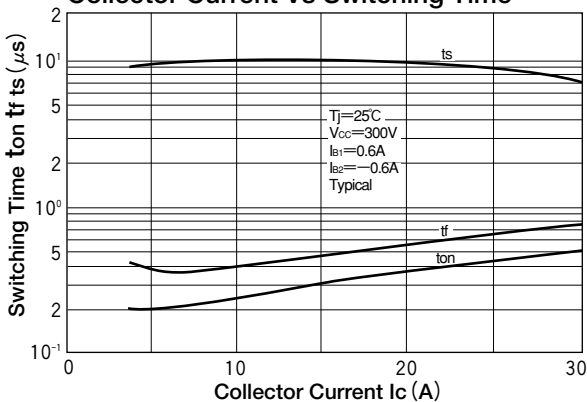

Maximum Transient Thermal Impedance Characteristics

