

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CMXT2222A

SURFACE MOUNT
DUAL NPN SILICON TRANSISTOR

SOT-26 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMXT2222A type is a dual NPN silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal general purpose and switching applications. Marking Code is **X1P**.

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

	<u>SYMBOL</u>		<u>UNITS</u>
Collector-Base Voltage	V_{CBO}	75	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current	I_C	600	mA
Power Dissipation	P_D	350	mW
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	Θ_{JA}	357	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS PER TRANSISTOR: ($T_A=25^\circ\text{C}$ unless otherwise noted)


<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
I_{CBO}	$V_{CB}=60\text{V}$		10	nA
I_{CBO}	$V_{CB}=60\text{V}, T_A=125^\circ\text{C}$		10	μA
I_{CEV}	$V_{CE}=60\text{V}, V_{EB}=3.0\text{V}$		10	nA
I_{EBO}	$V_{EB}=3.0\text{V}$		10	nA
BV_{CBO}	$I_C=10\mu\text{A}$	75		V
BV_{CEO}	$I_C=10\text{mA}$	40		V
BV_{EBO}	$I_E=10\mu\text{A}$	6.0		V
$V_{CE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$		0.3	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$		1.0	V
$V_{BE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	0.6	1.2	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$		2.0	V
h_{FE}	$V_{CE}=10\text{V}, I_C=0.1\text{mA}$	35		
h_{FE}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$	50		
h_{FE}	$V_{CE}=10\text{V}, I_C=10\text{mA}$	75		
h_{FE}	$V_{CE}=10\text{V}, I_C=150\text{mA}$	100	300	
h_{FE}	$V_{CE}=1.0\text{V}, I_C=150\text{mA}$	50		
h_{FE}	$V_{CE}=10\text{V}, I_C=500\text{mA}$	40		

ELECTRICAL CHARACTERISTICS PER TRANSISTOR: Continued

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
f_T	$V_{CE}=20V, I_C=20mA, f=100MHz$	300		MHz
C_{ob}	$V_{CB}=10V, I_E=0, f=1.0MHz$		8.0	pF
C_{ib}	$V_{EB}=0.5V, I_C=0, f=1.0MHz$		25	pF
h_{ie}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	2.0	8.0	$k\Omega$
h_{ie}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	0.25	1.25	$k\Omega$
h_{re}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$		8.0	$\times 10^{-4}$
h_{re}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$		4.0	$\times 10^{-4}$
h_{fe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	50	300	
h_{fe}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	75	375	
h_{oe}	$V_{CE}=10V, I_C=1.0mA, f=1.0kHz$	5.0	35	$\mu mhos$
h_{oe}	$V_{CE}=10V, I_C=10mA, f=1.0kHz$	25	200	$\mu mhos$
$r_b' C_c$	$V_{CB}=10V, I_E=20mA, f=31.8MHz$		150	ps
NF	$V_{CE}=10V, I_C=100\mu A, R_S=1.0k\Omega, f=1.0kHz$		4.0	dB
t_d	$V_{CC}=30V, V_{BE}=0.5V, I_C=150mA, I_{B1}=15mA$		10	ns
t_r	$V_{CC}=30V, V_{BE}=0.5V, I_C=150mA, I_{B1}=15mA$		25	ns
t_s	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$		225	ns
t_f	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$		60	ns


SOT-26 CASE - MECHANICAL OUTLINE

TOP VIEW

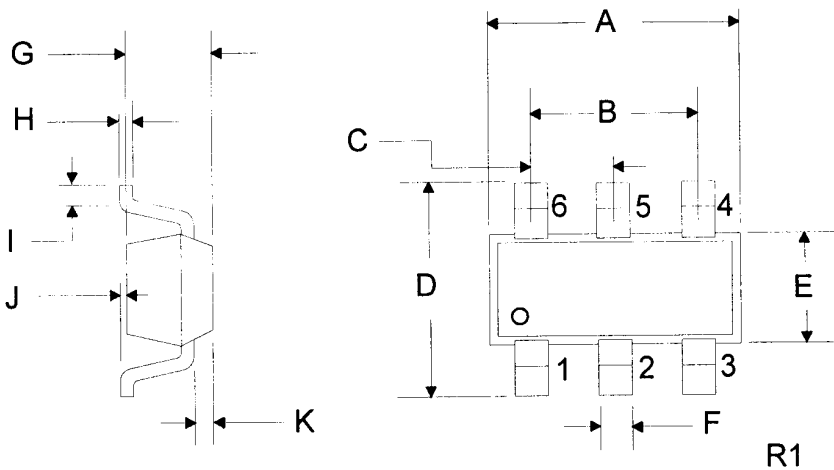

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.110	0.118	2.80	3.00
B	0.074	0.075	1.88	1.92
C	0.037	0.038	0.93	0.97
D	0.102	0.118	2.60	3.00
E	0.059	0.067	1.50	1.70
F	0.016	0.018	0.40	0.45
G	0.039	0.047	1.00	1.20
H	0.004	0.007	0.11	0.19
I	0.016	-	0.40	-
J	-	0.004	-	0.10
K	0.010	0.014	0.25	0.35

SOT-26 (REV: R1)

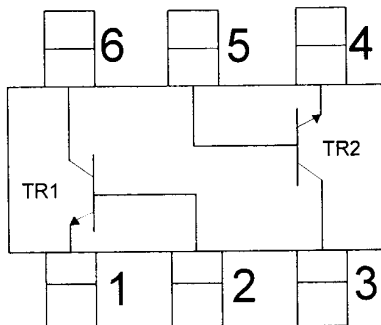

- Lead Code:
- 1) TR1 Emitter
 - 2) TR1 Base
 - 3) TR2 Collector
 - 4) TR2 Emitter
 - 5) TR2 Base
 - 6) TR1 Collector

R1



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.