



SILICON HIGH SPEED POWER TRANSISTORS

2SA 1043 (FT4853) 2SA 1044 (FT4863)


September 1979

SILICON PNP RING EMITTER TRANSISTOR (RET)

The 2SA1043/2SA1044 are silicon PNP general purpose, high power switching transistors fabricated with Fujitsu's unique Ring Emitter Transistor (RET) technology. RET devices are constructed with multiple emitters connected through diffused ballast resistors which provide uniform current density. This structure permits the design of high power transistors with exceptional switching characteristics and frequency response in high current applications.


The 2SA1043/2SA1044 are especially well-suited for switching regulators, DC to DC converters, power amplifiers or other applications where large SOA is required. NPN complements, 2SC2433/2SC2434, are available.

- Ultra-fast switching speed at 15A
 $t_r = 0.10 \mu s$ typ
 $t_{off} = 0.20 \mu s$ typ
- Improved Reverse Second-Breakdown Capability
- Excellent Safe Operating Area
- High $f_T = 60$ MHz (typ)



ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value		Unit
		2SA1043	2SA1044	
Collector to Base Voltage	V_{CBO}	120	70	V
Emitter to Base Voltage	V_{EBO}	5	5	V
Collector to Emitter Voltage	V_{CEO}	120	70	V
Collector Current	I_C	30	30	A
Base Current	I_B	10	10	A
Collector Power Dissipation ($T_C = 25^\circ C$)	P_C	150	150	W
Junction Temperature	T_j	+175		$^\circ C$
Storage Temperature Range	T_{stg}	-65 ~ +175		$^\circ C$

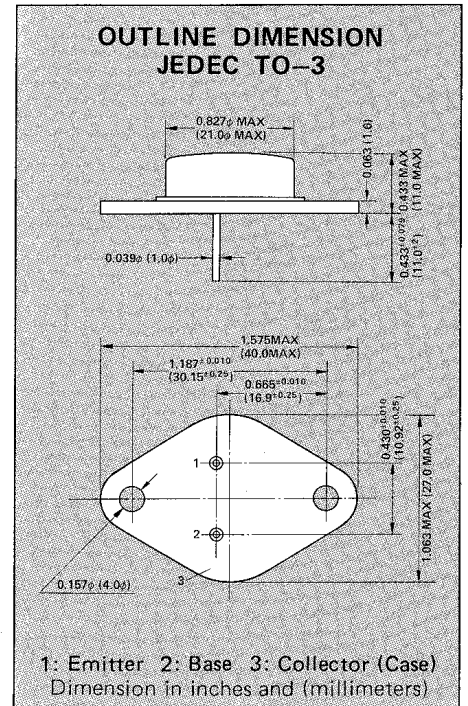

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Parameter	Symbol	Test Conditions	Limits						Unit
			2SA1043			2SA1044			
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Collector Cutoff Current	I_{CBO}	$V_{CB} = 120V, I_E = 0$	—	—	50	—	—	—	μA
Collector Cutoff Current	I_{CBO}	$V_{CB} = 70V, I_E = 0$	—	—	—	—	—	50	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V, I_C = 0$	—	—	50	—	—	50	μA
Collector Cutoff Current	I_{CEO}	$V_{CE} = 120V, I_B = 0$	—	—	1	—	—	—	mA
Collector Cutoff Current	I_{CEO}	$V_{CE} = 70V, I_B = 0$	—	—	—	—	—	1	mA
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 50\mu A, I_E = 0$	120	—	—	70	—	—	V
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1mA, I_C = 0$	5	—	—	5	—	—	V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, R_{BE} = \infty$	120	—	—	70	—	—	V
DC Current Gain	h_{FE1}	$V_{CE} = 5V, I_C = 3A$ *	35	—	200	35	—	200	
DC Current Gain	h_{FE2}	$V_{CE} = 5V, I_C = 30A$ *	7	—	—	10	—	—	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 15A, I_B = 1.5A$ *	—	0.9	1.5	—	0.9	1.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$		—	—	2.0	—	—	2.0	V
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_C = 2A$	—	60	—	—	60	—	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$	—	1000	—	—	1000	—	pF
Rise Time	t_r	$I_C = 15A, R_L = 2\Omega$ $I_{B1} = -I_{B2} = 1.5A$	—	0.10	—	—	0.10	—	μs
Storage Time	t_{stg}		—	0.10	—	—	0.10	—	μs
Fall Time	t_f		—	0.10	—	—	0.10	—	μs

* Pulsed: Pulse Width $\leq 300 \mu s$
Duty Cycle $\leq 6\%$