

2SC4901

Silicon NPN Bipolar Transistor


Application

VHF & UHF wide band amplifier

Features

- High gain bandwidth product
 $f_T = 9 \text{ GHz typ}$
- High gain, low noise figure
 $PG = 13.0 \text{ dB typ,}$
 $NF = 1.2 \text{ dB typ at } f = 900 \text{ MHz}$

CMPAK



1. Emitter
2. Base
3. Collector

Table 1 Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	15	V
Collector to emitter voltage	V_{CEO}	9	V
Emitter to base voltage	V_{EBO}	1.5	V
Collector current	I_C	50	mA
Collector power dissipation	P_C	100	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$


2SC4901

Table 2 Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector to base breakdown voltage	$V_{(BR)CBO}$	15	—	—	V	$I_C = 10 \mu A,$ $I_E = 0$
Collector cutoff current	I_{CBO}	—	—	10	μA	$V_{CB} = 12 V,$ $I_E = 0$
	I_{CEO}	—	—	1	mA	$V_{CE} = 9 V,$ $R_{BE} = \infty$
Emitter cutoff current	I_{EBO}	—	—	10	μA	$V_{EB} = 1.5 V,$ $I_C = 0$
DC current transfer ratio	h_{FE}	50	120	250		$V_{CE} = 5 V,$ $I_C = 20 mA$
Output capacitance	C_{ob}	—	0.9	1.4	pF	$V_{CB} = 5 V,$ $I_E = 0, f = 1 MHz$
Gain bandwidth product	f_T	6.0	9.0	—	GHz	$V_{CE} = 5 V,$ $I_C = 20 mA$
Power gain	PG	10.0	13.0	—	dB	$V_{CE} = 5 V,$ $I_C = 20 mA,$ $f = 900 MHz$
Noise figure	NF	—	1.2	2.5	dB	$V_{CE} = 5 V,$ $I_C = 5 mA,$ $f = 900 MHz$

Marking for 2SC4901 is "YK-".


Maximum collector power dissipation curve

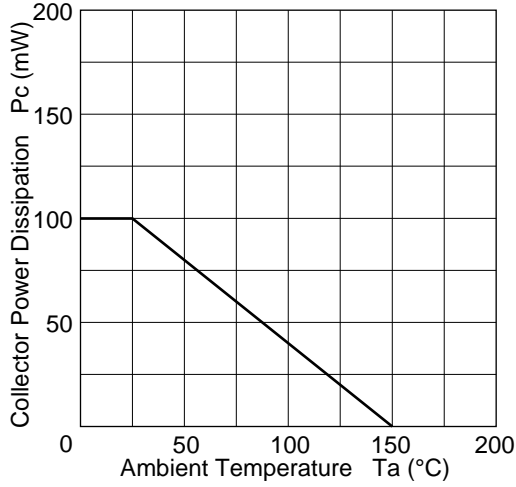


DC current transfer ratio vs. collector current

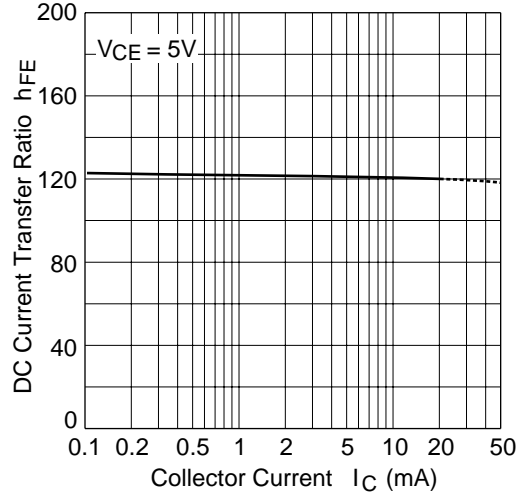

Gain bandwidth product vs. collector current

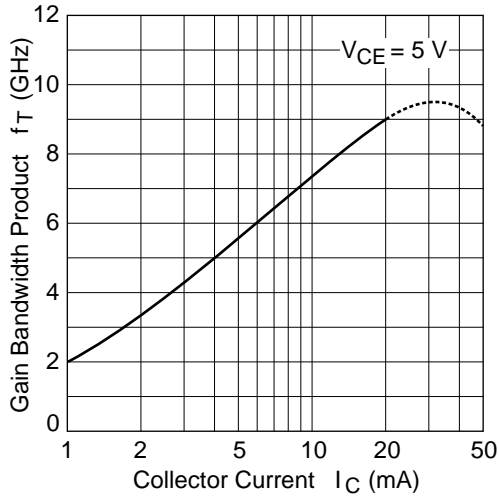


Collector output capacitance vs. collector to base voltage

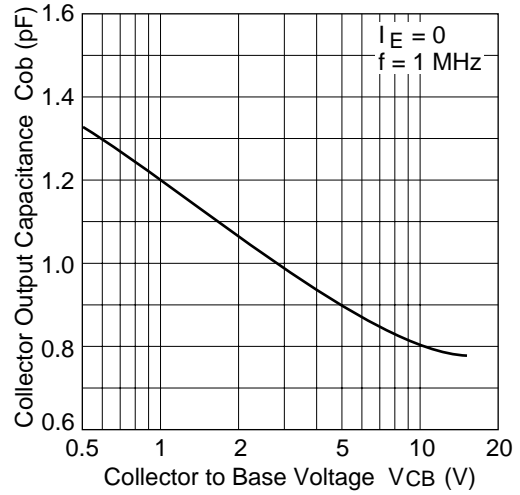


2SC4901


Power gain vs. collector current

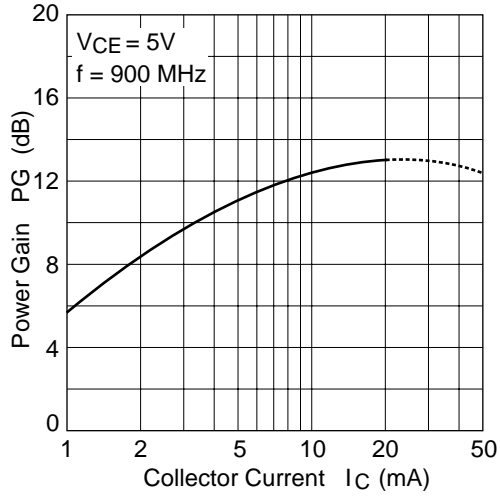


Noise figure vs. collector current

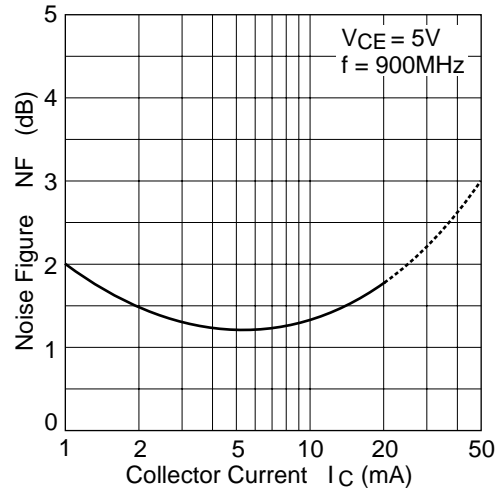

S21 parameter vs. collector current

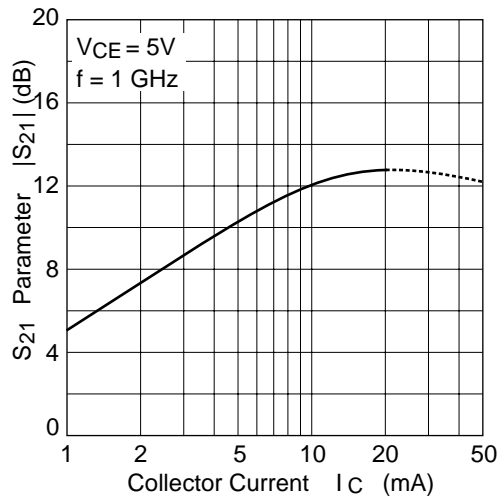


S11 parameter vs. frequency

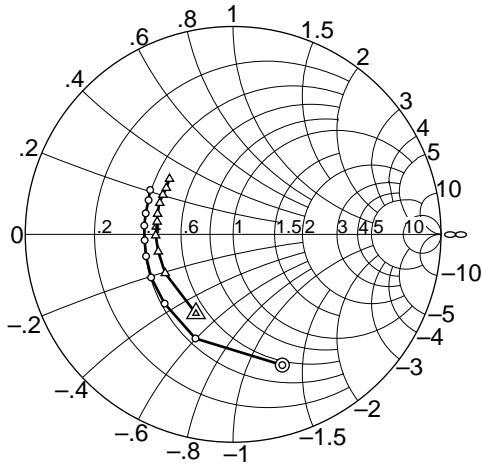

Condition: $V_{CE} = 5 \text{ V}$, $Z_o = 50 \Omega$
200 to 2000 MHz (200 MHz step)

○ — ○ ($I_C = 5 \text{ mA}$)
△ — △ ($I_C = 20 \text{ mA}$)


S21 parameter vs. frequency

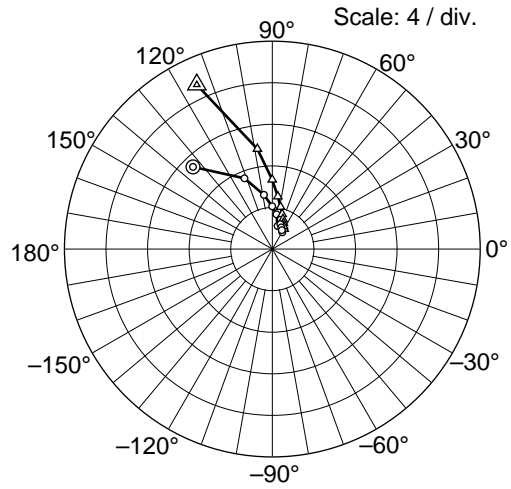

Condition: $V_{CE} = 5 \text{ V}$, $Z_o = 50 \Omega$
200 to 2000 MHz (200 MHz step)

○ — ○ ($I_C = 5 \text{ mA}$)
△ — △ ($I_C = 20 \text{ mA}$)


S12 parameter vs. frequency

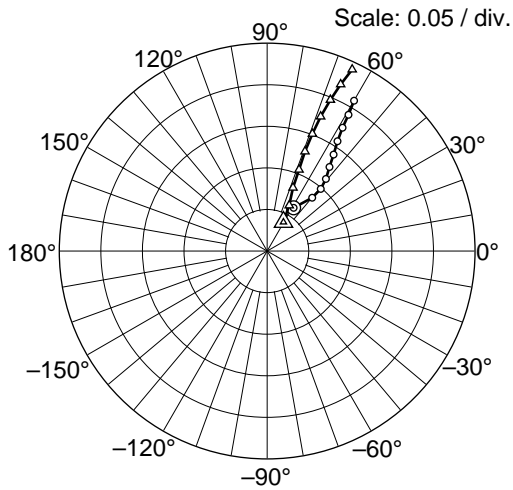

Condition: $V_{CE} = 5 \text{ V}$, $Z_o = 50 \Omega$
200 to 2000 MHz (200 MHz step)

○ — ○ ($I_C = 5 \text{ mA}$)
△ — △ ($I_C = 20 \text{ mA}$)

S22 parameter vs. frequency

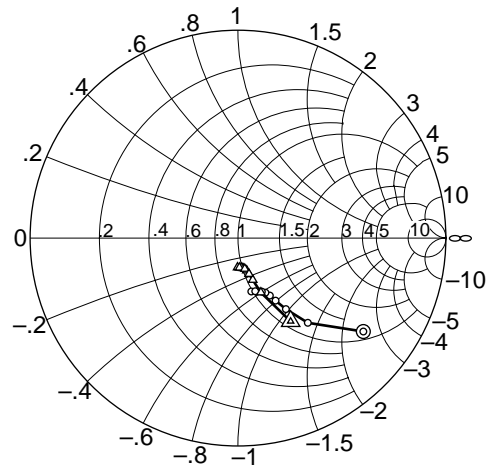

Condition: $V_{CE} = 5 \text{ V}$, $Z_o = 50 \Omega$
200 to 2000 MHz (200 MHz step)

○ — ○ ($I_C = 5 \text{ mA}$)
△ — △ ($I_C = 20 \text{ mA}$)

2SC4901

Table 3 S Parameter ($V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$, $Z_O = 50\ \Omega$, Emitter common)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
200	0.672	-69.4	10.99	134.0	0.0610	58.8	0.752	-26.7
400	0.533	-109.9	7.32	111.5	0.0841	49.9	0.528	-50.5
600	0.469	-134.7	5.28	98.8	0.0989	49.3	0.412	-56.0
800	0.446	-152.3	4.12	90.2	0.112	50.9	0.351	-59.0
1000	0.432	-165.9	3.37	83.2	0.126	53.5	0.316	-61.0
1200	0.427	-176.2	2.88	77.2	0.141	55.5	0.294	-63.3
1400	0.430	174.1	2.52	72.1	0.157	57.4	0.282	-66.0
1600	0.433	166.5	2.26	67.5	0.174	58.6	0.274	-69.1
1800	0.439	158.0	2.04	63.3	0.191	59.2	0.269	-72.0
2000	0.453	151.9	1.88	59.2	0.209	60.0	0.265	-76.0

Table 4 S Parameter ($V_{CE} = 5\text{ V}$, $I_C = 20\text{ mA}$, $Z_O = 50\ \Omega$, Emitter common)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
200	0.421	-115.2	17.40	114.7	0.0399	50.6	0.474	-57.7
400	0.377	-150.2	9.74	98.5	0.0609	64.2	0.284	-67.2
600	0.370	-167.0	6.68	90.1	0.0822	67.8	0.213	-70.5
800	0.373	-179.1	5.09	84.0	0.105	68.6	0.180	-72.9
1000	0.371	170.6	4.13	79.0	0.128	69.2	0.161	-74.9
1200	0.377	164.9	3.49	74.3	0.151	68.9	0.151	-77.6
1400	0.384	156.9	3.04	70.3	0.174	68.3	0.146	-80.7
1600	0.388	150.7	2.71	66.8	0.197	67.3	0.143	-83.5
1800	0.392	145.3	2.45	63.3	0.219	66.2	0.142	-87.2
2000	0.406	139.0	2.25	59.5	0.241	64.9	0.141	-91.0