

Transistors


FTR • FTL

Low profile flat-package for limited space applications.

Taped type can be used on automated line. Bulk type is also available.

Application	Package		V _{CEO} (V) *V _{CES} **V _{CER}	I _c (mA)	I _c Max. (A)	P _c (mW) (T _a =25°C)	h _{FE}	h _{FE} Ranking code	V _{CE} (V)	I _c (mA)	Internal circuit
	FTR	FTL									
	Part No.										
Low Noise	2SA937ALN	—	—50	—150	—	300	180~560	R S	—6	—1	—
	2SB821	☆2SB1276	—40	—300	—	250	120~560	Q R S	—6	—10	—
	2SC1613A	☆2SC4034	80	50	—	150	120~560	Q R S	3	5	—
	2SC2021LN	—	40	150	—	300	390~820	E	6	1	—
Pre Amp	2SA785	2SA1554	—80**	—50	—	150	82~270	P Q	—3	—10	—
	2SA937A	2SA1561A	—50	—150	—	300	82~390	P Q R	—6	—1	—
	2SC2021	2SC4038	40	150	—	300	390~820	E	6	1	—
			50	150	—	300	120~560	Q R S	6	1	—
Driver	2SC4775	2SC4777	25	100	200	400	180~560	R S	6	1	—
	2SA874	2SA1559	—32	—500	—	300	82~390	P Q R	—3	—100	—
	2SA881	2SA1560	—32	—1000	—	600	82~390	P Q R	—3	—100	—
	2SB822	2SB1277	—32	—2000	—3000	750	82~390	P Q R	—3	—500	—
	2SB851	2SB1278	—80	—700	—	750	82~390	P Q R	—3	—100	—
	2SB1199	2SB1279	—15	—200	—	300	56~	—	—3	—100	—
	2SC1652	2SC4037	32	500	—	400	82~390	P Q R	3	100	—
	2SC2673	2SC4040	32	1000	—	600	82~390	P Q R	3	100	—
	2SD1055	2SD1919	32	2000	2500	750	82~390	P Q R	3	500	—
	2SD1787	2SD1921	50	500	—	400	82~390	P Q R	3	100	—
	2SD2168	2SD2169	31±4	2000	3000	500	82~270	P Q	3	500	—
	—	2SD2175	80	700	1000	500	82~390	P Q R	3	100	—
Low V _{CE(sat)}	—	2SB1428	—20	—3000	—5000	600	82~390	P Q R	—2	—100	—
	2SD1469	2SD1920	15	1000	—	600	120~560	Q R S	3	100	—
	—	2SD2154	20	3000	5000	600	120~560	Q R S	2	100	—
Indicator Driver	2SA806	2SA1558	—210**	—30	—	150	56~270	N P Q	—3	—5	—
High Voltage SW	2SC1615	2SC4036	210**	30	—	150	56~270	N P Q	3	5	—
Darlington	2SA790	2SA1555	—32*	—300	—1500	300	5k~	—	—5	—100	Fig. 1
	2SC1545	2SC4032	32*	300	1500	300	5k~	—	5	100	Fig. 2
High h _{FE}	2SD2145	2SD2191	20	500	1000	400	560~2700	U V W	3	10	—
High V _{EB0}	2SD2312	2SD2314	50	150	200	400	560~2700	U V W	5	1	—

Note : ☆ Under development



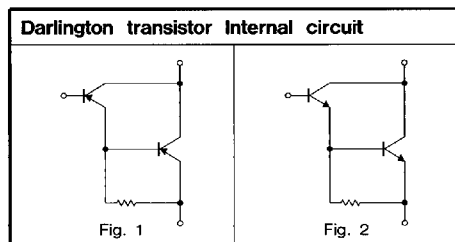


FTR • FTL High frequency type

Application	Package		V _{CEO} (V)	I _c (mA)	f _r (MHz)	C _{ob} (pF)	h _{FE}	h _{FE} Ranking code	V _{CE} (V)	I _c (mA)
	FTR	FTL								
	Part No.									
FM IF AM RF	2SC2063	2SC4039	25	50	300	1.6	56~270	N P Q	6	1
TV Tuner Mix. Osc.	2SC3080	2SC4041	19	50	1100	1.2	39~270	M N P Q	10	5
	2SC4045	—	11	50	3200	1.1	27~270	L M N P Q	10	5

●Product Designation

- When ordering, specify the type.
- Check each code against the tables shown below.
- Fill a space with the next character.

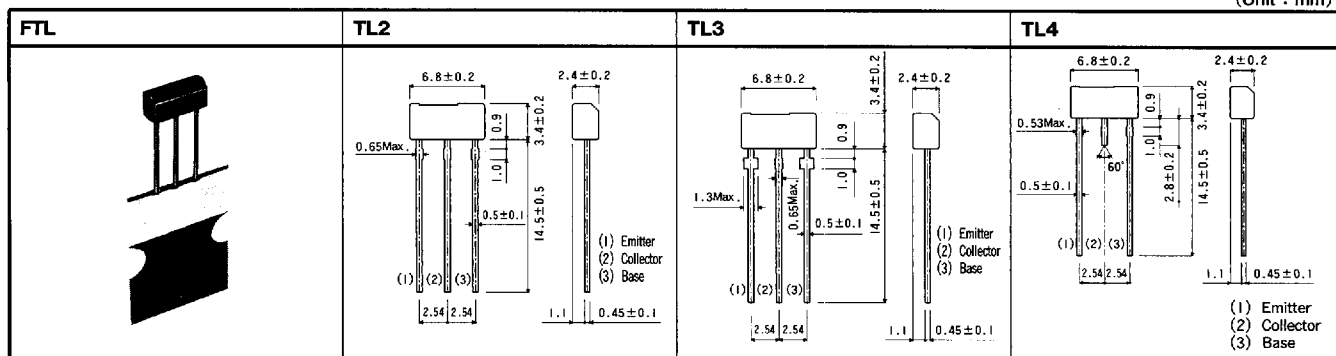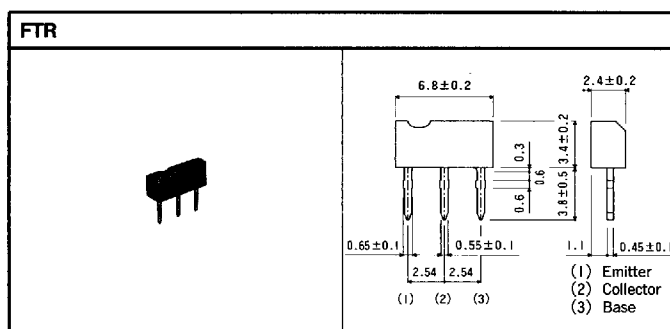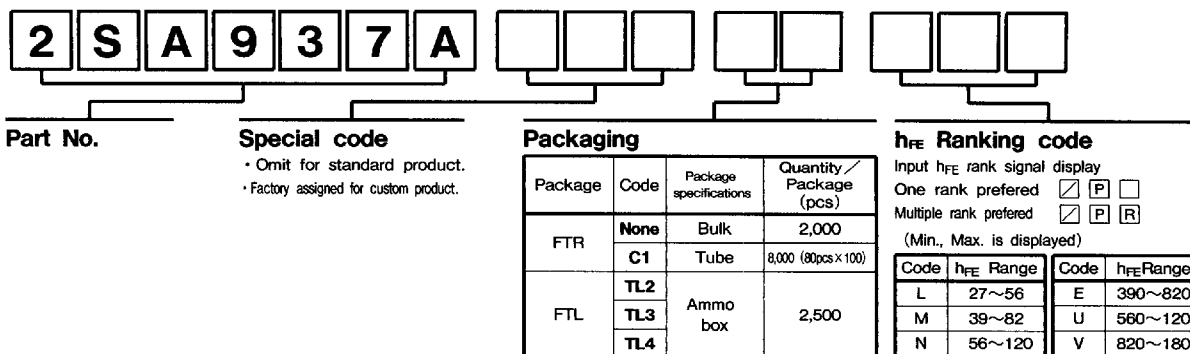

●Packaging Specifications

