

## 2SD2294

**Silicon NPN Triple Diffused  
CTV Horizontal Deflection Output**

### Feature

- High breakdown voltage  
 $V_{CBO} = 1500 \text{ V}$

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Item	Symbol	Rating	Unit
Collector to base voltage	$V_{CBO}$	1500	V
Collector to emitter voltage	$V_{CEO}$	800	V
Emitter to base voltage	$V_{EBO}$	6	V
Collector current	$I_C$	3	A
Collector peak current	$i_{C(\text{peak})}$	3.5	A
Collector surge current	$i_{C(\text{surge})}$	10	A
Collector power dissipation	$P_C^{*1}$	50	W
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{\text{stg}}$	-55 to +150	$^\circ\text{C}$

Note: 1. Value at  $T_C = 25^\circ\text{C}$ .

### Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )


Item	Symbol	Min	Typ	Max	Unit	Test condition
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	800	—	—	V	$I_C = 10 \text{ mA}$ , $R_{BE} = \infty$
Emitter to base breakdown voltage	$V_{(BR)EBO}$	6	—	—	V	$I_E = 10 \text{ mA}$ , $I_C = 0$
Collector cutoff current	$I_{CES}$	—	—	500	$\mu\text{A}$	$V_{CE} = 1500 \text{ V}$ , $R_{BE} = 0$
DC current transfer ratio	$h_{FE}$	—	—	30		$V_{CE} = 5 \text{ V}$ , $I_C = 0.3 \text{ A}$
Collector to emitter saturation voltage	$V_{CE(\text{sat})}$	—	—	5	V	$I_C = 2.5 \text{ A}$ , $I_B = 0.8 \text{ A}$
Base to emitter saturation voltage	$V_{BE(\text{sat})}$	—	—	1.5	V	$I_C = 2.5 \text{ A}$ , $I_B = 0.8 \text{ A}$
Fall time	$t_f$	—	—	1.0	$\mu\text{s}$	$I_{CP} = 2.75 \text{ A}$ , $I_{B1} = 0.6 \text{ A}$ , $I_{B2} \approx -1.3 \text{ A}$ , $L_B = 0$

TO-3P

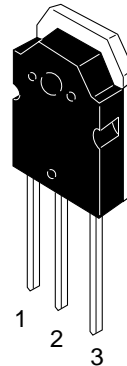


1. Base
2. Collector
3. Emitter


Maximum Collector Power Dissipation Curve

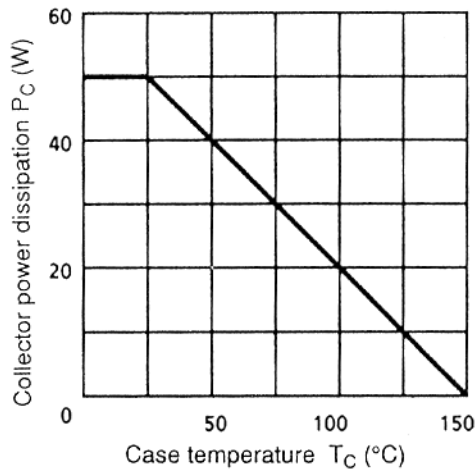


Area of Safe Operation

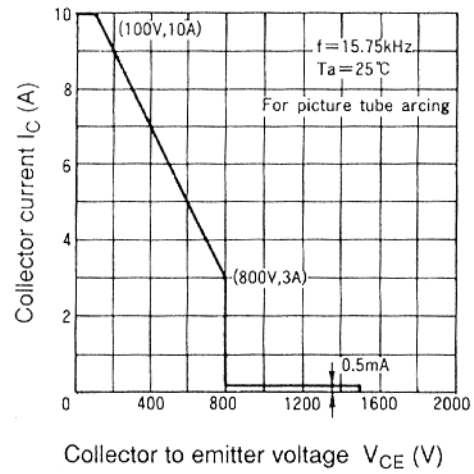

Typical Output Characteristics

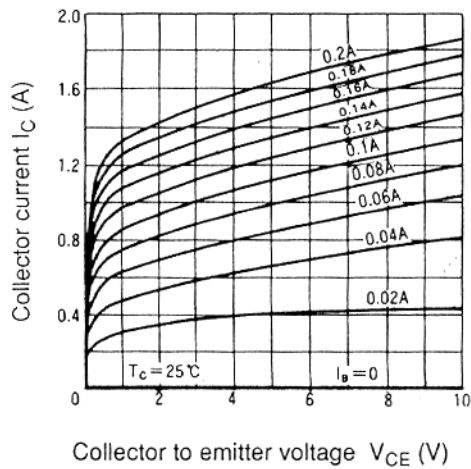


DC Current Transfer Ratio vs. Collector Current

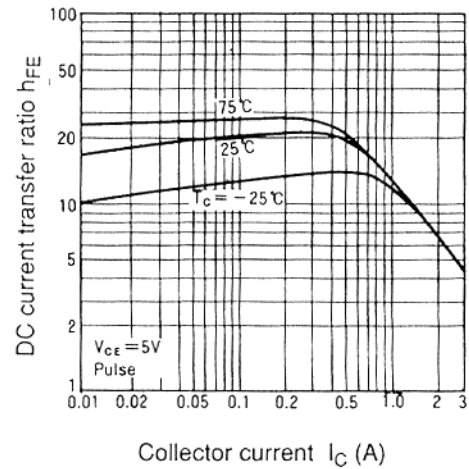


## 2SD2294

Collector to Emitter Saturation Voltage vs. Collector Current

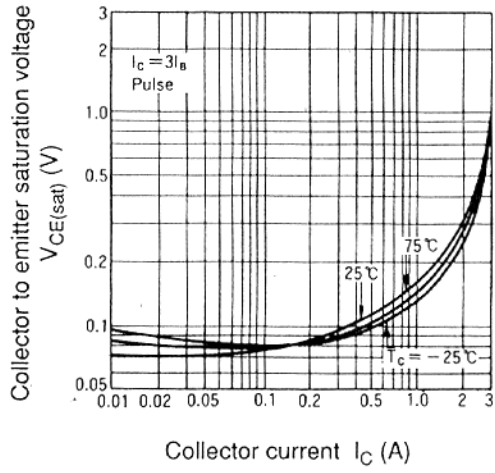

Base to Emitter Saturation Voltage vs. Collector Current

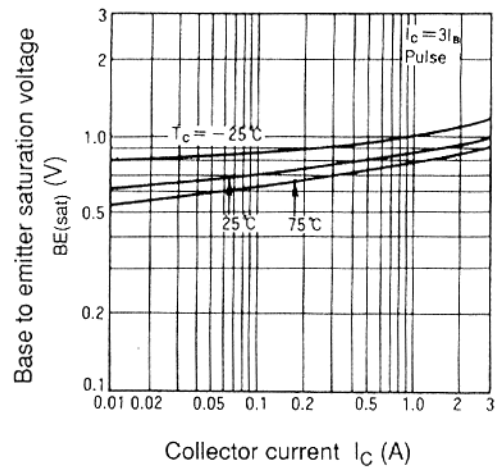

Collector to Emitter Saturation Voltage vs. Base Current

