

# 2SK1034

## Silicon N-channel Power F-MOS FET

### ■ Features

- Low ON resistance  $R_{DS(on)}$  :  $R_{DS(on)} = 0.09\Omega$  (typ.)
- High switching rate :  $t_f = 85\text{ns}$  (typ.)
- No secondary breakdown
- Low voltage drive is possible ( $V_{GS} = 4\text{V}$ ).


### ■ Application

- DC-DC converter
- No contact relay
- Solenoid drive
- Motor drive

### ■ Absolute Maximum Ratings ( $T_c = 25^\circ\text{C}$ )

Item	Symbol	Value	Unit	
Drain-source voltage	$V_{DS}$	100	V	
Gate-source voltage	$V_{GS}$	+20	V	
Drain current	At 4V driving	$I_D$	12	A
	DC	$I_D$	15	
	Full-bridge rate	$I_{DP}$	30	
Power dissipation	$T_c = 25^\circ\text{C}$	$P_D$	45	W
	$T_a = 25^\circ\text{C}$	$P_D$	2.0	
Channel temperature	$T_{ch}$	150	$^\circ\text{C}$	
Storage temperature	$T_{stg}$	-55 ~ +150	$^\circ\text{C}$	

### ■ Package Dimensions

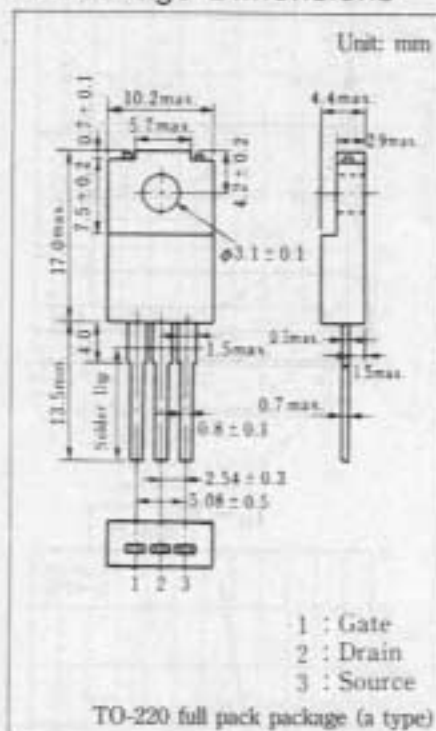

### ■ Electrical Characteristics ( $T_c = 25^\circ\text{C}$ )

Item	Symbol	Condition	min.	typ.	max.	Unit
Drain current	$I_{DSS}$	$V_{DS} = 80\text{V}$ , $V_{GS} = 0$			10	$\mu\text{A}$
Gate-source current	$I_{GSS}$	$V_{GS} = \pm 20\text{V}$ , $V_{DS} = 0$			$\pm 1$	$\mu\text{A}$
Drain-source voltage	$V_{DSS}$	$I_D = 1\text{mA}$ , $V_{GS} = 0$	100			V
Gate threshold voltage	$V_{th}$	$V_{DS} = 10\text{V}$ , $I_D = 1\text{mA}$	1		2.5	V
Drain-source ON resistance	$R_{DS(on)1}$	$V_{GS} = 10\text{V}$ , $I_D = 8\text{A}$		0.09	0.135	$\Omega$
Drain-source ON resistance	$R_{DS(on)2}$	$V_{GS} = 4\text{V}$ , $I_D = 6\text{A}$		0.12	0.18	$\Omega$
Forward transfer admittance	$ Y_{fs} $	$V_{DS} = 10\text{V}$ , $I_D = 6\text{A}$	5.5	9		S
Input capacitance	$C_{iss}$	$V_{DS} = 10\text{V}$ , $V_{GS} = 0$ , $f = 1\text{MHz}$		1500		pF
Output capacitance	$C_{oss}$			450		pF
Reverse transfer capacitance	$C_{rss}$			120		pF
Turn-on time	$t_{on}$	$V_{GS} = 10\text{V}$ , $I_D = 6\text{A}$ $V_{DD} \approx 30\text{V}$ , $R_L = 5\Omega$		50		ns
Fall time	$t_f$			85		ns
Delay time	$t_d(\text{off})$			300		ns