



# LA71525M

## Video/audio signal processor for VHS VCRs (single chip for Y/C/A)

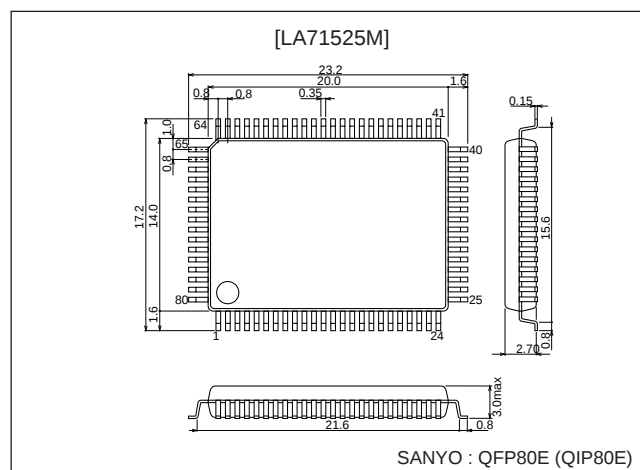
### Overview

The LA71525M is a video/audio signal processor IC for VHS VCRs. It handles recording and playback of PAL/GBI, MESECAM, and 4.43 NTSC signals. NTSC software tapes can be converted to PAL for monitoring, and the IC realizes high picture and sound quality. The IC requires no adjustments and minimizes the peripheral component count, making it possible to implement efficient signal handling at low cost.

### Package Dimensions

unit: mm

3174-QFP80E



### Specifications

#### Maximum Ratings at Ta = 25°C

| Parameter                   | Symbol              | Conditions                                                                  | Ratings     | Unit |
|-----------------------------|---------------------|-----------------------------------------------------------------------------|-------------|------|
| Maximum supply voltage      | V <sub>CC</sub> max | pin 36, 41, 47                                                              | 7.0         | V    |
|                             | V <sub>CC</sub> max | pin 76                                                                      | 9.0         | V    |
| Allowable power dissipation | Pd max              | Ta ≤ 65°C<br>114.3 x 76.1 x 1.6 mm <sup>3</sup> with paper phenol substrate | 1400        | mW   |
| Operating temperature       | Topr                |                                                                             | -10 to +65  | °C   |
| Storage temperature         | Tstg                |                                                                             | -40 to +150 | °C   |

#### Operating Conditions at Ta = 25°C

| Parameter                                  | Symbol                | Conditions     | Ratings    | Unit |
|--------------------------------------------|-----------------------|----------------|------------|------|
| Recommended supply voltage                 | V <sub>CC</sub> 1     | pin 36, 41, 47 | 5.0        | V    |
|                                            | V <sub>CC</sub> 2     | pin 76         | 6.8        | V    |
|                                            | (V <sub>CC</sub> 2)   | (pin 76)       | (7.5)      | V    |
| Recommended operating supply voltage range | V <sub>CC</sub> 1 opg |                | 4.8 to 5.5 | V    |
|                                            | V <sub>CC</sub> 2 opg |                | 6.4 to 7.9 | V    |

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Operating Characteristics at Ta = 25°C, V<sub>CC</sub> = 5V

| Parameter                                                   | Symbol            | Input | Output | Conditions                                                                                                                                                                                                        | Ratings              |                      |                      | Unit  |
|-------------------------------------------------------------|-------------------|-------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|----------------------|-------|
|                                                             |                   |       |        |                                                                                                                                                                                                                   | min                  | typ                  | max                  |       |
| [REC mode Y]                                                |                   |       |        |                                                                                                                                                                                                                   |                      |                      |                      |       |
| Current drain<br>(POWER SAVE MODE)                          | I <sub>CCS</sub>  |       |        | Influx current measured at pin 41 in power save mode                                                                                                                                                              | 20                   | 22                   | 24                   | mA    |
| Current drain<br>(REC)                                      | I <sub>CCR</sub>  |       |        | Sum of influx current at pins 36, 41, 47, 76 measured;<br>5V: pins 36, 41, 47; 7V: pin 76                                                                                                                         | 130                  | 145                  | 160                  | mA    |
| EE output level 1                                           | V <sub>EE1</sub>  | T28A  | T38    | T38 output level measured with<br>V <sub>IN</sub> = 1.0 Vp-p video signal (PAL)                                                                                                                                   | 2.0                  | 2.1                  | 2.2                  | Vp-p  |
| EE output level 2                                           | V <sub>EE2</sub>  | T28A  | T38    | T38 output level measured with<br>V <sub>IN</sub> = 1.0 Vp-p video signal (NTSC)                                                                                                                                  | 2.0                  | 2.1                  | 2.2                  | Vp-p  |
| AGC characteristics 1                                       | AGC1              | T28A  | T38    | Ratio of V <sub>EE</sub> and T38 output level with<br>V <sub>IN</sub> = 2.0 Vp-p video signal                                                                                                                     | 0                    | 0.6                  | 1.2                  | dB    |
| AGC characteristics 2                                       | AGC2              | T28A  | T38    | Ratio of V <sub>EE</sub> and T38 output level with<br>V <sub>IN</sub> = 0.5 Vp-p video signal                                                                                                                     | −1.2                 | −0.2                 | 0                    | dB    |
| AGC characteristics 3                                       | AGC3              | T28A  | T38    | T38 SYNC level measured with<br>V <sub>IN</sub> = 700 mVp-pLUMI, 600 mVp-p SYNC                                                                                                                                   | 550                  | 650                  | 750                  | mVp-p |
| AGC characteristics 4                                       | AGC4              | T28A  | T38    | T38 SYNC level measured with<br>V <sub>IN</sub> = 700 mVp-pLUMI, 150 mVp-p SYNC                                                                                                                                   | 370                  | 420                  | 470                  | mVp-p |
| Sync separation output level                                | V <sub>SYR</sub>  | T28A  | T37    | T37 output pulse crest value measured with<br>V <sub>IN</sub> = 1.0 Vp-p video signal                                                                                                                             | 4.0                  | 4.2                  | 4.4                  | Vp-p  |
| Sync separation output pulse<br>width                       | PW <sub>SYR</sub> | T28A  | T37    | T37 output pulse width measured with<br>V <sub>IN</sub> = 1.0 Vp-p video signal                                                                                                                                   | 4.2                  | 4.5                  | 4.8                  | μs    |
| Sync separation output<br>Pre-delay time                    | ΔT <sub>SYR</sub> | T28A  | T37    | Delay of output SYNC vs. input SYNC measured with<br>V <sub>IN</sub> = 1.0 Vp-p video signal                                                                                                                      | 0.6                  | 0.8                  | 1.0                  | μs    |
| Sync separation output<br>Threshold level                   | TH <sub>SYR</sub> | T28A  | T37    | Input level gradually attenuated and measured when<br>output pulse width becomes larger than PW <sub>SYR</sub> by 1 μs                                                                                            |                      | −20                  | −15                  | dB    |
| Sync tip level<br>Pedestal level<br>White level measurement | L <sub>VOR</sub>  | T28A  | T38    | Potential measured with V <sub>IN</sub> = 1.0 Vp-p video signal,<br>under following conditions.<br>T38 sync tip level: L <sub>SYN</sub><br>Pedestal level: L <sub>PED</sub><br>White peak level: L <sub>WHT</sub> | 700                  | 800                  | 900                  | mV    |
| Simulated H insertion level                                 | ΔHDR              | T28A  | T38    | T38 DC level measured with 2.7V DC applied to T33.<br>Using this as L <sub>HDR</sub> , differential to L <sub>PED</sub> (see above) is<br>calculated.                                                             | −150                 | 0                    | +150                 | mV    |
| White insertion level                                       | ΔWHR              | T28A  | T38    | T38 DC level measured with 1.3V DC applied to T33.<br>Using this as L <sub>WHR</sub> , differential to L <sub>WHT</sub> (see above) is<br>calculated.                                                             | −150                 | 0                    | +150                 | mV    |
| REC YNR operation                                           | R <sub>YNR</sub>  | T28A  | T25    | T25 YNR characteristics measured with Serial<br>V <sub>IP</sub> = 1 Vp-p standard color bar signal<br>00 OFF<br>10 (weak)<br>01 (medium)<br>11 (strong)<br>input                                                  | 0<br>1.7<br>4.2<br>/ | 0<br>2.7<br>5.7<br>/ | 0<br>3.7<br>7.2<br>/ | dB    |
| Y <sub>LPF</sub> frequency response<br>characteristics 1    | Y <sub>LPF1</sub> | T28A  | T25    | 1 MHz response of T25 vs. 500 kHz with V <sub>IN</sub> = 1 Vp-p<br>standard multiburst signal                                                                                                                     | −0.3                 | +0.2                 | +0.7                 | dB    |
| Y <sub>LPF</sub> frequency response<br>characteristics 2    | Y <sub>LPF2</sub> | T28A  | T25    | 2 MHz response of T25 vs. 500 kHz with V <sub>IN</sub> = 1 Vp-p<br>standard multiburst signal                                                                                                                     | −1.4                 | −0.4                 | +0.6                 | dB    |
| Y <sub>LPF</sub> frequency response<br>characteristics 3    | Y <sub>LPF3</sub> | T28A  | T25    | 3 MHz response of T25 vs. 500 kHz with V <sub>IN</sub> = 1 Vp-p<br>standard multiburst signal                                                                                                                     | −4                   | −2                   | 0                    | dB    |
| Y <sub>LPF</sub> frequency response<br>characteristics 4    | Y <sub>LPF4</sub> | T28A  | T25    | 4.43 MHz response of T25 vs. 500 kHz with<br>V <sub>IN</sub> = 1 Vp-p standard multiburst signal                                                                                                                  |                      |                      | −25                  | dB    |
| REC-FM output level                                         | V <sub>FM</sub>   |       | T18    | T18 output level measured in no-signal input condition                                                                                                                                                            | 304                  | 320                  | 336                  | mVp-p |
| Carrier frequency 1 (PAL)                                   | F <sub>FM1</sub>  |       | T18    | T18 output frequency measured in no-signal input<br>condition                                                                                                                                                     | 3.725                | 3.8                  | 3.875                | MHz   |
| Carrier frequency 2 (NTSC)                                  | F <sub>FM2</sub>  |       |        |                                                                                                                                                                                                                   | 3.325                | 3.4                  | 3.475                | MHz   |

Continued on next page

Continued from preceding page

| Parameter                              | Symbol                     | Input       | Output     | Conditions                                                                                                                                  | Ratings         |       |       | Unit |
|----------------------------------------|----------------------------|-------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------|-------|------|
|                                        |                            |             |            |                                                                                                                                             | min             | typ   | max   |      |
| REC-FM output level                    | $H_{MOD}$                  |             | T18        | Secondary distortion measured in no-signal input condition                                                                                  |                 | -40   | -35   | dB   |
| Deviation 1 (PAL)                      | DEV1                       | T28A        | T18        | T18 deviation measured with $V_{IN} = \text{white } 100\% \text{ } 1 \text{ Vp-p}$                                                          | 0.95            | 1.00  | 1.05  | MHz  |
| Deviation 2 (NTSC)                     | DEV2                       | T28A        | T18        | T18 deviation measured with $V_{IN} = \text{white } 100\% \text{ } 1 \text{ Vp-p}$                                                          | 0.95            | 1.00  | 1.05  | MHz  |
| FM modulator linearity                 | $L_{MOD}$                  | T26         | T18        | Output frequency set to f2.85 with 2.85V DC applied to T26                                                                                  | -2              | 0     | +2    | %    |
| $1/2f_H$ carrier shift                 | CS                         |             | T18        | Output frequency shift                                                                                                                      | 6.5             | 7.8   | 9.1   | kHz  |
| Emphasis gain                          | $G_{EMP24}$<br>$G_{EMP37}$ | T26A        | T24<br>T37 | Level difference of T26A and T37 measured with $V_{IN} = 500 \text{ mVp-p}$ , 10 kHz sine wave input                                        | -0.75           | -0.25 | +0.25 | dB   |
| Detail enhancer characteristics 1      | $G_{ENH1}$                 | T26A        | T24        | Level difference of T26A and T37 measured with $V_{IN} = 158 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$        | 0.1             | 0.6   | 1.1   | dB   |
| Detail enhancer characteristics 2      | $G_{ENH2}$                 | T26A        | T24        | Level difference of T26A and T24 measured with $V_{IN} = 50 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$         | 1.3             | 2.3   | 3.3   | dB   |
| Detail enhancer characteristics 3      | $G_{ENH3}$                 | T26A        | T24        | Level difference of T26A and T24 measured with $V_{IN} = 15.8 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$       | 1.8             | 3.3   | 4.8   | dB   |
| Nonlinear emphasis characteristics 1   | $G_{NLEMP1}$               | T26A        | T24        | Level difference of T26A and T24 measured with $V_{IN} = 500 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$        | 0.3             | 1.2   | 2.1   | dB   |
| Nonlinear emphasis characteristics 2   | $G_{NLEMP2}$               | T26A        | T24        | Level difference of T26A and T24 measured with $V_{IN} = 158 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$        | 2.5             | 3.8   | 5.0   | dB   |
| Nonlinear emphasis characteristics 3   | $G_{NLEMP3}$               | T26A        | T24        | Level difference of T26A and T24 measured with $V_{IN} = 50 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP24}$         | Serial 1<br>6.5 | 8.0   | 9.5   | dB   |
|                                        |                            |             |            |                                                                                                                                             | 2<br>4.5        | 6.0   | 7.5   |      |
|                                        |                            |             |            |                                                                                                                                             | 3<br>2.5        | 4.0   | 5.5   |      |
|                                        |                            |             |            |                                                                                                                                             | 4<br>0          | 0     | 0     |      |
| Main linear emphasis characteristics 1 | $G_{ME1}$                  | T26A        | T37        | Level difference of T26A and T37 measured with $V_{IN} = 50 \text{ mVp-p}$ , 500 kHz sine wave input<br>Differential with $G_{EMP37}$       | 10.5            | 11.0  | 11.5  | dB   |
| Main linear emphasis characteristics 2 | $G_{ME2}$                  | T26A        | T37        | Level difference of T26A and T37 measured with $V_{IN} = 50 \text{ mVp-p}$ , 2 MHz sine wave input<br>Differential with $G_{EMP37}$         | 12.5            | 13.0  | 13.5  | dB   |
| White clip level                       | $L_{WC}$                   | T28A        | T37        | White clip level at T37 measured with $V_{IN} = \text{white } 100\% \text{ } 1.0 \text{ Vp-p}$                                              | CTL 1<br>185    | 195   | 205   | %    |
| Dark clip level                        | $L_{DC}$                   | T28A        | T37        | Dark clip level at T37 measured with $V_{IN} = \text{white } 100\% \text{ } 1.0 \text{ Vp-p}$                                               | 2<br>176        | 185   | 194   |      |
| Video output linearity                 | LINY                       | T28A        | T38        | T38 stair levels measured with video signal 1.0 Vp-p (linearity unit, 5 stairs) input. Stair linearity determined by arithmetic processing. | -0.5            | 0     | +0.5  | dB   |
| [PB mode Y]                            |                            |             |            |                                                                                                                                             |                 |       |       |      |
| Current drain PB                       | $I_{CCP}$                  |             |            | 5V: pins 36, 41, 47; 7V: pin 76<br>Sum of influx current at pins 36, 41, 47, 76 measured                                                    | 153             | 170   | 187   | mA   |
| Dropout compensation time              | $T_{DOC}$                  | T15<br>T26A | T38        | T20: 4 MHz, 300 mVp-p sine wave<br>T26A: revert time for T38 output from when 0.5 Vp-p video signal T15 input is set to 0                   | 10.5            | 12.5  | 14.5  | H    |
| DOC characteristics                    | $G_{DOC}$                  | T15<br>T26A | T38        | T15: 4 MHz, 300 mVp-p sine wave<br>T26A: 0.5 Vp-p video signal<br>Input/output response 5H after setting T15 input to 0                     | -1.5            | 0     | +1.5  | dB   |
| PB Y level                             | V-Y <sub>OUT</sub>         | T15         | T38        | Playback Y level with DEV = 1.0 MHz FM signal input                                                                                         | 2.00            | 2.10  | 2.20  | Vp-p |
| Self-recording/playback Y level        | R/P-OUT                    |             | T38        | Playback Y level for self-recording/playback                                                                                                | 1.93            | 2.10  | 2.27  | Vp-p |

Continued on next page


LA71525M

Continued from preceding page

| Parameter                                                   | Symbol             | Input | Output | Conditions                                                                                                                                                                 | Ratings                    |                            |                            | Unit  |
|-------------------------------------------------------------|--------------------|-------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|-------|
|                                                             |                    |       |        |                                                                                                                                                                            | min                        | typ                        | max                        |       |
| FM demodulator linearity                                    | L <sub>DEM</sub>   | T15   | T25    | $L_{DEM} = \frac{V_{DEM}^4 - (V_{DEM}^2 + V_{DEM}^6) / 2}{V_{DEM}^6 - V_{DEM}^2} \times 100$                                                                               | -3.5                       | 0                          | +3.5                       | %     |
| Carrier leak                                                | CL                 | T15   | T25    | Ratio of T25 4 MHz component and SDEM with V <sub>IN</sub> = 300 mVp-p f = 4 MHz                                                                                           |                            |                            | -35                        | dB    |
| Playback YNR characteristics                                | P <sub>YNR</sub>   | T26A  | T38    | V <sub>IN</sub> = white 50% + CW (15.8 mVp-p)<br>Ratio of 32 fH component and 32.5 fH component<br>Serial 00 OFF<br>10 (weak)<br>01 (medium)<br>11 (strong)                | 0<br>-3.7<br>-9.2<br>-13.3 | 0<br>-3.2<br>-8.2<br>-11.8 | 0<br>-2.7<br>-7.2<br>-10.3 | dB    |
| Nonlinear deemphasis characteristics 1                      | G <sub>NLDE1</sub> | T26A  | T38    | Input/output response measured with V <sub>IN</sub> = white 50% + sine wave f = 2 MHz 158 mVp-p                                                                            | -3.5                       | -2.5                       | -1.5                       | dB    |
| Nonlinear deemphasis characteristics 2                      | G <sub>NLDE2</sub> | T26A  | T38    | f = 2 MHz, 50 mVp-p<br>CTL 1<br>2<br>3<br>4                                                                                                                                | 4.5<br>2.5<br>0.5<br>0     | 6.0<br>4.0<br>2.0<br>0     | 7.5<br>5.5<br>3.5<br>0     | dB    |
| Double noise canceler characteristics 1                     | G <sub>WNC1</sub>  | T26A  | T38    | f = 1.2 MHz, 158 mVp-p, pin 69 open<br>Gr2 bit 8/7 = "10", Gr5 bit 1 = "1"                                                                                                 | -4                         | -3                         | -2                         | dB    |
| Double noise canceler characteristics 2                     | G <sub>WNC2</sub>  | T26A  | T38    | f = 1.2 MHz, 50 mVp-p, pin 69 open<br>Gr2 bit 8/7 = "10", Gr5 bit 1 = "1"                                                                                                  | -16.5                      | -15.0                      | -13.5                      | dB    |
| Double noise canceler characteristics 3                     | G <sub>WNC3</sub>  | T26A  | T38    | f = 1.2 MHz, 15.8 mVp-p, pin 69 open<br>Gr2 bit 8/7 = "10", Gr5 bit 1 = "1"                                                                                                | -32                        | -30                        | -28                        | dB    |
| Double noise canceler characteristics 4                     | G <sub>WNC4</sub>  | T26A  | T38    | f = 2.5 MHz, 15.8 mVp-p, pin 69 open<br>Gr2 bit 8/7 = "10", Gr5 bit 1 = "1"                                                                                                | -9                         | -8                         | -7                         | dB    |
| Double noise canceler characteristics 5                     | G <sub>WNC5</sub>  | T26A  | T38    | f = 2.5 MHz, 15.8 mVp-p, pin 69 open<br>Gr2 bit 8/7 = "10", Gr5 bit 1 = "1"                                                                                                | -17                        | -15                        | -13                        | dB    |
| PIC-CTL hard response characteristics 1                     | G <sub>PH1</sub>   | T26A  | T38    | f = 1 MHz, 158 mVp-p, Gr5 bit 6/5/4 = "1/0/0"                                                                                                                              | 2.5                        | 3.5                        | 4.5                        | dB    |
| PIC-CTL hard response characteristics 2                     | G <sub>PH2</sub>   | T26A  | T38    | f = 2 MHz, 158 mVp-p, Gr5 bit 6/5/4 = "1/0/0"                                                                                                                              | 6                          | 7                          | 8                          | dB    |
| PIC-CTL soft response characteristics 1                     | G <sub>PH3</sub>   | T26A  | T38    | f = 1 MHz, 158 mVp-p, Gr5 bit 6/5/4 = "0/0/0"                                                                                                                              | 6                          | 7                          | 8                          | dB    |
| PIC-CTL soft response characteristics 2                     | G <sub>PH4</sub>   | T26A  | T38    | f = 2 MHz, 158 mVp-p, Gr5 bit 6/5/4 = "0/0/0"                                                                                                                              | -8                         | -7                         | -6                         | dB    |
| Sync tip level<br>Pedestal level<br>White level measurement | L <sub>VOR</sub>   | T26A  | T38    | T38 video output sync tip (L <sub>SYN</sub> ), pedestal (L <sub>PED</sub> ), white level (L <sub>WHT</sub> ) potential measured with V <sub>IN</sub> = white 100% 0.5 Vp-p | -                          | -                          | -                          |       |
| Simulated V insertion level                                 | ΔVDP               | T26A  | T38    | DC voltage at T38 is measured when 5V is applied to T33. Taking this as L <sub>VDP</sub> , differential with L <sub>SYN</sub> above is calculated.                         | -50                        | 0                          | +50                        | mV    |
| Simulated H insertion level                                 | ΔHDP               | T26A  | T38    | DC voltage at T38 is measured when 2.7V is applied to T33. Taking this as L <sub>HDP</sub> , differential with L <sub>PED</sub> above is calculated.                       | -100                       | 0                          | +100                       | mV    |
| White insertion level                                       | ΔWHP               | T26A  | T38    | DC voltage at T38 is measured when 1.3V is applied to T33. Taking this as L <sub>WHP</sub> , differential with L <sub>WHT</sub> above is calculated.                       | -100                       | 0                          | +100                       | mV    |
| Sync separation output level                                | V <sub>SYP</sub>   | T26A  | T37    | Pin 37 output pulse crest value measured with V <sub>IN</sub> = 0.5 Vp-p video signal                                                                                      | 4.0                        | 4.2                        | 4.4                        | Vp-p  |
| Sync separation output pulse width                          | P <sub>WSYP</sub>  | T26A  | T37    | Pin 37 output pulse width measured with V <sub>IN</sub> = 0.5 Vp-p video signal                                                                                            | 4.35                       | 4.65                       | 4.95                       | μs    |
| Sync separation output<br>Pre-delay time                    | ΔT <sub>SYP</sub>  | T26A  | T37    | Delay of output SYNC vs. input SYNC measured with V <sub>IN</sub> = 0.5 Vp-p video signal                                                                                  | 0.7                        | 0.9                        | 1.1                        | μs    |
| 4V regulator                                                | V <sub>REG</sub>   | T26A  | T37    | T31 DC level measured                                                                                                                                                      | 3.8                        | 4.0                        | 4.2                        | V     |
| FMAGC output level                                          | V <sub>FAGC</sub>  | T15   | T17    | Pin 17 signal amplitude measured with V <sub>IN</sub> = 150, 300, 600 mVp-p 4 MHz CW                                                                                       | 325                        | 350                        | 375                        | mVp-p |

Continued on next page

Continued from preceding page

| Parameter                                      | Symbol            | Input | Output      | Conditions                                                                                                                                                                                                                                                     | Ratings    |            |            | Unit    |
|------------------------------------------------|-------------------|-------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|---------|
|                                                |                   |       |             |                                                                                                                                                                                                                                                                | min        | typ        | max        |         |
| [REC mode chroma]                              |                   |       |             |                                                                                                                                                                                                                                                                |            |            |            |         |
| REC chroma<br>low-range converter output level | $V_{OR-14}$       | T28A  | T14A        | T14A burst level measured with $V_{IN} = 1$ Vp-p CTL 0<br>standard color bar signal 1                                                                                                                                                                          | 215<br>180 | 225<br>190 | 235<br>200 | mVp-p   |
| REC chroma/FM ratio                            | C/FM              | T28A  | T14A<br>T18 | Down-converted chroma level/FM level ratio with 100%<br>chroma input<br>( $R_L: 5.1 \text{ k}\Omega$ )                                                                                                                                                         | -3.7       | -3.0       | -2.3       | dB      |
| Burst emphasis amount<br>(NTSC mode)           | $G_{BE}$          | T28A  | T14A        | SP/EP and LP T14A burst level ratio with $V_{IN} = 1$ Vp-p<br>standard color bar signal                                                                                                                                                                        | 5.5        | 6.0        | 6.5        | dB      |
| VXO oscillation level<br>(PAL mode)            | $V_{VXO-RP}$      | T28A  | T56         | T56 output amplitude measured with FET probe at<br>$V_{IN} = 1$ Vp-p standard color bar signal                                                                                                                                                                 | 300        | 500        | 700        | mVp-p   |
| VXO oscillation level<br>(NTSC mode)           | $V_{VXO-RN}$      | T28A  | T56         | T56 output amplitude measured with FET probe at<br>$V_{IN} = 1$ Vp-p standard color bar signal                                                                                                                                                                 | 300        | 500        | 700        | mVp-p   |
| REC ACC characteristics 1                      | $ACC_{R1}$        | T28A  | T14A        | $V_{IN} = 1$ Vp-p standard color bar signal and chroma<br>signal only boosted by +6 dB<br>T14A burst level measured and compared to VOR-14                                                                                                                     |            | 0.2        | 0.5        | dB      |
| REC ACC characteristics 2                      | $ACC_{R2}$        | T28A  | T14A        | $V_{IN} = 1$ Vp-p standard color bar signal and chroma<br>signal only boosted by -6 dB<br>T14A burst level measured and compared to VOR-14                                                                                                                     | -0.5       | -0.1       |            | dB      |
| REC ACC<br>Killer input level                  | $V_{ACK-ON}$      | T28A  | T14A        | T14A input burst level measured when output goes off<br>and compared to standard input level, with $V_{IN} = 1$ Vp-p<br>standard color bar signal and chroma signal being<br>gradually attenuated.                                                             |            | -26        |            | dB      |
| REC ACC<br>Killer output level                 | $V_{OACK}$        | T28A  | T14A        | T14A output level measured with spectrum analyzer and<br>compared to VOR-14, in killer condition as described<br>above.                                                                                                                                        |            | -60        | -50        | dB      |
| REC ACC<br>Demodulator input level             | $V_{ACK-OFF}$     | T28A  | T14A        | From killer condition as described above, T14A input<br>burst level is measured when output goes on with input<br>chroma level being gradually increased. This is<br>compared to standard input level.                                                         |            | -20        |            | dB      |
| REC APC<br>Pull-in range 1                     | $\Delta f_{APC1}$ | T28A  | T14A        | Input signal: 50% white signal superimposed with<br>4.4336 MHz 300 mVp-p CW. After checking that T14A<br>output is on, CW frequency is raised until T14A output<br>goes off. Frequency then is gradually reduced.<br>CW frequency when T14A output goes on: f1 | 350        |            |            | Hz      |
| REC APC<br>Pull-in range 2                     | $\Delta f_{APC2}$ | T28A  | T14A        | Same as above, CW frequency is lowered until T14A<br>output goes off. Then frequency is gradually raised.<br>CW frequency when T14A output goes on: f2                                                                                                         |            |            | -350       | Hz      |
| REC AFC<br>Pull-in range 1                     | $\Delta f_{AFC1}$ | T28A  | T51         | 300 mVp-p, 15.6 kHz pulse train with 5 $\mu$ s pulse width<br>is input. Pulse train frequency is raised until T51 output<br>waveform is impaired. Then frequency is lowered.<br>Pulse train frequency when T51 waveform becomes<br>normal: f1                  | +1.0       |            |            | kHz     |
| REC AFC<br>Pull-in range 2                     | $\Delta f_{AFC2}$ | T28A  | T51         | Same as above, pulse train frequency is lowered until T51<br>output waveform is impaired. Then frequency is raised.<br>Pulse train frequency when T51 waveform becomes<br>normal: f2                                                                           |            |            | -1.0       | kHz     |
| BGP delay time                                 | $t_D$             | T28   | T37<br>T60  | T37 and T60 waveforms are observed with standard color<br>bar input to T28A<br>                                                                                            | 3.1        | 3.4        | 3.7        | $\mu$ s |
| BGP width                                      | $t_W$             |       |             |                                                                                                                                                                                                                                                                | 4.7        | 4.9        | 5.1        | $\mu$ s |

Continued on next page

Continued from preceding page

| Parameter                                       | Symbol           | Input        | Output | Conditions                                                                                                                                                                                                                                                       | Ratings |       |       | Unit  |
|-------------------------------------------------|------------------|--------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|-------|-------|
|                                                 |                  |              |        |                                                                                                                                                                                                                                                                  | min     | typ   | max   |       |
| 2 fsc output level                              | $V_{2fsc}$       | T28A         | T58    | T58 level measured in no-signal input condition                                                                                                                                                                                                                  | 360     | 400   | 440   | mVp-p |
| 2 fsc duty                                      | $D_{2fsc}$       | T28A         | T58    | T58 duty measured in no-signal input condition                                                                                                                                                                                                                   | 40      | 50    | 60    | %     |
| [PB mode chroma chroma]                         |                  |              |        |                                                                                                                                                                                                                                                                  |         |       |       |       |
| PB chroma video<br>Output level<br>(PAL mode)   | $P_{Vop-38}$     | T15A<br>T26A | T38    | From T15A in PB and SP mode, a chroma signal down-converted from the PAL chroma noise test signal (SP mode, burst 80 mVp-p) and mixed with a 4 MHz 300 mVp-p sine wave is input.<br>From T26A, a 50% white signal is input.<br>Burst level is measured at T38.   | 490     | 580   | 670   | mVp-p |
| PB chroma video<br>Output level<br>(NTSC mode)  | $N_{Vop-38}$     | T15A<br>T26A | T38    | From T15A in PB and SP mode, a chroma signal down-converted from the NTSC chroma noise test signal (SP mode, burst 160 mVp-p) and mixed with a 4 MHz 300 mVp-p sine wave is input.<br>From T26A, a 50% white signal is input.<br>Burst level is measured at T38. | 490     | 580   | 670   | mVp-p |
| PB chroma<br>Pin 46 output level                | $V_{op-46}$      | T15A<br>T26A | T46    | Under same conditions as for $P_{Vop-38}$ , T46 burst level is measured.                                                                                                                                                                                         | 170     | 200   | 230   | mVp-p |
| PB ACC characteristics 1                        | $ACC_{p1}$       | T15A<br>T26A | T46    | Under same conditions as for $P_{Vop-38}$ , input chroma level is raised by +6 dB. T46 burst level is measured and compared to $P_{Vop-46}$ .                                                                                                                    |         | 0.5   | 0.8   | dB    |
| PB ACC characteristics 2                        | $ACC_{p2}$       | T15A<br>T26A | T46    | Under same conditions as for $P_{Vop-38}$ , input chroma level is raised by -6 dB. T46 burst level is measured and compared to $P_{Vop-38}$ .                                                                                                                    | -0.5    | -0.2  |       | dB    |
| PB killer input level                           | $V_{ACK-P}$      | T15A<br>T26A | T46    | Under same conditions as for $P_{Vop-38}$ , input chroma level is attenuated and input burst level is measured when chroma output at T46 goes off (compared to standard input 80 mVp-p)                                                                          |         |       | -25   | dB    |
| Chroma output level in PPB killer condition     | $V_{OACK-P}$     | T15A<br>T26A | T38    | T38 measured with spectrum analyzer and compared to $P_{Vop-38}$ in killer condition as described above.                                                                                                                                                         |         | -44   | -40   | dB    |
| PB main converter carrier leak                  | $C_{LP}$         | T15A<br>T26A | T38    | Under same conditions as for $P_{Vop-38}$ , T38 is measured with spectrum analyzer and 4.43 MHz component is compared to 5.06 MHz component.                                                                                                                     |         | -40   | -33   | dB    |
| Burst deemphasis<br>(NTSC mode)                 | $G_{BD}$         | T15A<br>T26A | T46    | 629 kHz, 160 mVp-p CW is mixed with 4 MHz, 300 mVp-p CW and input to T15A.<br>50% white signal is input from T26A.<br>Output level during T46 burst interval and during other times is compared.                                                                 | -5.75   | -5.50 | -5.25 | dB    |
| PB XO output level<br>(PAL mode)                | $V_{XO-PP}$      |              | T59    | T59 output level measured with FET probe in PB mode                                                                                                                                                                                                              | 300     | 500   | 700   | mVp-p |
| PB XO oscillator frequency deviation (PAL mode) | $\Delta f_{XOP}$ |              | T59    | T59 frequency measured in PB mode: f                                                                                                                                                                                                                             | -9      | 0     | +9    | Hz    |
| NTSC -> PAL conversion<br>V axis burst level    | $V_{BNAP}$       | T15A<br>T26A | T38    | From T15A, down-converted chroma noise test signal mixed with 4 MHz, 300 mVp-p CW is input.<br>From T26A, 50% white signal is input.<br>-45° burst level at T38 is measured and compared to $P_{Vop-38}$                                                         | -1      | 0     | +1    | dB    |
| NTSC -> PAL conversion<br>Burst level ratio     | $\Delta B-NAP$   | T15A<br>T26A | T38    | Under same conditions as above, +45° burst level is measured and compared to $V_{BNAP}$                                                                                                                                                                          | -2      | 0     | +2    | dB    |

Continued on next page

Continued from preceding page







| Parameter                           | Symbol            | Input        | Output | Conditions                                                                                                                                                                                                                                                                                                                 | Ratings |      |      | Unit |
|-------------------------------------|-------------------|--------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|------|
|                                     |                   |              |        |                                                                                                                                                                                                                                                                                                                            | min     | typ  | max  |      |
| NTSC -> PAL conversion chroma phase | P-NAP             | T15A<br>T26A | T38    | 4 MHz, 300 mVp-p CW and 100% chroma signal phase shifted by $-90^\circ$ from burst are mixed and input to T15A. 50% white signal is input to T26A. Chroma phase when pin 67 is 0V is measured and taken as $\theta_1$ . Chroma phase when pin 67 is 5V is measured and taken as $\theta_2$ . P-NAP = $\theta_1 - \theta_2$ | 160     | 180  | 200  | deg  |
| [REC mode/EQ]                       |                   |              |        |                                                                                                                                                                                                                                                                                                                            |         |      |      |      |
| REC EQ characteristics 1            | G <sub>REQ1</sub> | T22          | T18    | V <sub>IN</sub> = 500 mVp-p, f = 4 MHz<br>Input/output response measured                                                                                                                                                                                                                                                   | -3      | -2   | -1   | dB   |
| REC EQ secondary distortion         | H <sub>REQ</sub>  | T22          | T18    | Under same conditions as above, secondary harmonics are measured.                                                                                                                                                                                                                                                          |         | -40  | -35  | dB   |
| REC EQ characteristics 2            | G <sub>REQ2</sub> | T22          | T18    | V <sub>IN</sub> = 500 mVp-p, f = 627 kHz<br>Input/output response measured                                                                                                                                                                                                                                                 |         |      | -20  | dB   |
| REC EQ characteristics 3            | G <sub>REQ3</sub> | T22          | T18    | V <sub>IN</sub> = 500 mVp-p, f = 1.07 MHz<br>Input/output response measured                                                                                                                                                                                                                                                |         |      | -20  | dB   |
| REC EQ characteristics 4            | G <sub>REQ4</sub> | T22          | T18    | V <sub>IN</sub> = 500 mVp-p, f = 4.5 MHz<br>Input/output response measured                                                                                                                                                                                                                                                 | -3.3    | -2.3 | -1.3 | dB   |
| REC EQ characteristics 5            | G <sub>REQ5</sub> | T22          | T18    | V <sub>IN</sub> = 500 mVp-p, f = 2.0 MHz<br>Input/output response measured                                                                                                                                                                                                                                                 | -1      | 0    | +1   | dB   |
| [PB mode/EQ]                        |                   |              |        |                                                                                                                                                                                                                                                                                                                            |         |      |      |      |
| PB EQ characteristics 1             | G <sub>PEQ1</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p, f = 4 MHz<br>Input/output response measured                                                                                                                                                                                                                                                   | -2.5    | -1.1 | 0.0  | dB   |
| PB EQ secondary distortion          | H <sub>PEQ</sub>  | T15A         | T17    | Under same conditions as above, secondary harmonics are measured.                                                                                                                                                                                                                                                          |         | -40  | -30  | dB   |
| PB EQ characteristics 2             | G <sub>PEQ2</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p, f = 627 kHz<br>Input/output response measured                                                                                                                                                                                                                                                 |         |      | -30  | dB   |
| PB EQ characteristics 3             | G <sub>PEQ3</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p<br>High-range trap frequency and gain measured                                                                                                                                                                                                                                                 |         | 7.8  |      | MHz  |
|                                     |                   |              |        |                                                                                                                                                                                                                                                                                                                            |         |      | -25  | dB   |
| PB EQ characteristics 4             | G <sub>PEQ4</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p, f = 1.07 MHz<br>Input/output response measured                                                                                                                                                                                                                                                |         |      | -30  | dB   |
| PB EQ characteristics 5             | G <sub>PEQ5</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p, f = 4.5 MHz<br>Input/output response measured                                                                                                                                                                                                                                                 | -1      | 0    | +1   | dB   |
| PB EQ characteristics 6             | G <sub>PEQ6</sub> | T15A         | T17    | V <sub>IN</sub> = 400 mVp-p, f = 2.0 MHz<br>Input/output response measured                                                                                                                                                                                                                                                 | -11     | -10  | -9   | dB   |

Continued on next page

## Electrical Characteristics of Audio System

| Parameter                                | Symbol                                       | Input                    | Output | Conditions                                                                                       | Ratings    |              |              | Unit       |
|------------------------------------------|----------------------------------------------|--------------------------|--------|--------------------------------------------------------------------------------------------------|------------|--------------|--------------|------------|
|                                          |                                              |                          |        |                                                                                                  | min        | typ          | max          |            |
| LINE AMP voltage gain (PB)               | $V_{GLP}$                                    | T11                      | T77    | $V_{IN} = -30$ dBV                                                                               | 23.0       | 23.5         | 24.0         | dB         |
| LINE AMP voltage gain (A1, A2, A3)       | $V_{GLR}$                                    | T71<br>T73<br>T75        | T77    | $V_{IN} = -30$ dBV                                                                               | 23.0       | 23.5         | 24.0         | dB         |
| LINE AMP distortion (PB)                 | $THD_L$                                      | T11                      | T77    | $V_{IN} = -30$ dBV                                                                               | 0.01       | 0.1          | 0.4          | %          |
| LINE AMP Output noise voltage (PB)       | $V_{NOL}$                                    | —                        | T77    | $R_g = 1$ k $\Omega$ , DIN audio filter                                                          | -80.0      | -74.0        | -70.5        | dBV        |
| LINE AMP Maximum output voltage (PB)     | $V_{OML}$                                    | T11                      | T77    | Output voltage for 1% THD : $V_{CC} = 6.8$ V<br>: $V_{CC} = 7.5$ V                               | 1.3<br>1.5 | 1.5<br>1.7   | 1.7<br>1.9   | Vrms       |
| Output voltage with LINE AMP ALC         | $V_{OA}$                                     | T73                      | T77    | $V_{IN} = -28$ dBV                                                                               | -7         | -6           | -5           | dBV        |
| LINE AMP ALC effect                      | ALC                                          | T73                      | T77    | T73 input level reduced from -28 dBV to -8 dBV                                                   | 0          | 1            | 3            | dB         |
| LINE AMP ALC distortion                  | $THD_A$                                      | T73                      | T77    | $V_{IN} = -28$ dBV                                                                               | 0.01       | 0.1          | 0.5          | %          |
| MUTE attenuation                         | $M_{PB}$<br>$M_{A1}$<br>$M_{A2}$<br>$M_{A3}$ | T11<br>T71<br>T73<br>T75 | T77    | -10 dBV signals applied to all inputs and MUTE enabled.                                          | 80         | 90           | 120          | dB         |
| EQ AMP open circuit voltage gain         | $V_{GOE}$                                    | T7                       | T10    | $V_{IN} = -66$ dBV                                                                               | 58         | 64           | 70           | dB         |
| EQ AMP input converted noise voltage     | $V_{NIE}$                                    | —                        | T10    | $R_g = 620$ $\Omega$ , DIN audio filter                                                          | 0.1        | 0.8          | 1.8          | $\mu$ Vrms |
| REC AMP voltage gain                     | $V_{GR}$                                     | T79                      | T1     | $V_{IN} = -20$ dBV                                                                               | 13.6       | 14.1         | 14.6         | dB         |
| REC AMP distortion                       | $THD_R$                                      | T79                      | T1     | $V_{IN} = -20$ dBV                                                                               | 0.001      | 0.1          | 0.4          | %          |
| REC AMP Maximum output voltage           | $V_{OMR}$                                    | T79                      | T1     | Output voltage for 1% THD : $V_{CC} = 6.8$ V<br>Output voltage for 1% THD : $V_{CC} = 7.5$ V     | 1.3<br>1.5 | 1.5<br>1.7   | 1.7<br>1.9   | Vrms       |
| Current drain (REC)                      | $I_{CCRA}$                                   | —                        | —      | Influx current measured at pin 76 (no-signal condition) : $V_{CC} = 6.8$ V<br>: $V_{CC} = 7.5$ V | 8.8<br>9.2 | 11.0<br>11.5 | 13.2<br>13.8 | mA         |
| Current drain (PB)                       | $I_{CCPA}$                                   | —                        | —      | Influx current measured at pin 76 (no-signal condition) : $V_{CC} = 6.8$ V<br>: $V_{CC} = 7.5$ V | 7.6<br>8.0 | 9.5<br>10.0  | 11.4<br>12.0 | mA         |
| DC offset voltage (PB) in MUTE condition | $MT_{DCO}$                                   | —                        | T77    | DC offset voltage at pin 77 measured for MUTE ON (no-signal condition)                           | 0          | 30           | 50           | mV         |

## Pin Function

| Pin number | Pin name         | Standard DC voltage | Signal waveform                   | Equivalent circuit                                                                                  |
|------------|------------------|---------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------|
| 1          | A-REC-OUT        | 3.3V                | CW, 3.2 Vp-p                      |  <p>A10277</p>   |
| 2          | A-GND            | 0V                  |                                   |                                                                                                     |
| 3          | A-EQ-SW1         | 3.3V                | REC MODE<br>SP-CW<br>LP, EP-0V    |  <p>A10278</p>   |
|            |                  |                     | REC MODE<br>NONE                  |                                                                                                     |
| 4          | A-EQ-SW2         | 0V                  | REC MODE<br>NONE                  |  <p>A10279</p>  |
|            |                  |                     | PB, EP MODE<br>SP, LP-CW<br>EP-0V |                                                                                                     |
| 5          | A-REC-SW         | 3.3V                | REC MODE<br>DC $V_{REF}$          |  <p>A10280</p> |
|            |                  |                     | PB MODE<br>CW 1 mVp-p             |                                                                                                     |
| 6          | A-HEAD<br>SW-CTL | REC 7V              | DC                                |  <p>A10281</p> |
|            |                  | PB 0V               |                                   |                                                                                                     |
| 7          | A-EQ-IN          | 3.3V                | REC<br>DC 3.3V                    |  <p>A10282</p> |
|            |                  |                     | PB<br>CW, 1 mVp-p                 |                                                                                                     |
| 8          | A-EQ-NFB         | 3.3V                | REC<br>DC 3.3V                    |                                                                                                     |
|            |                  |                     | PB<br>CW, 1 mVp-p                 |                                                                                                     |








Continued on next page

Continued from preceding page

| Pin number | Pin name              | Standard DC voltage | Signal waveform    | Equivalent circuit |
|------------|-----------------------|---------------------|--------------------|--------------------|
| 9          | A-EQ-SW1              | 3.3V                | REC<br>DC 3.3V     |                    |
|            |                       |                     | PB<br>CW, 95 mVp-p |                    |
| 10         | A-EQ-OUT              | 3.3V                | REC DC 3.3V        |                    |
|            |                       |                     | PB CW, 95 mVp-p    |                    |
| 11         | A-LINE-PB-IN          | 3.3V                | REC<br>DC 3.3V     |                    |
|            |                       |                     | PB<br>CW 95 mVp-p  |                    |
| 12         | AGC-TC1               | REC 2.3V            | DC                 |                    |
|            | Carrier Leak Balancer | PB 2.3V             | DC                 |                    |
| 13         | ACC-FILT              | REC 1.8V            | DC                 |                    |
|            |                       | PB 1.8V             |                    |                    |
| 14         | REC-C-OUT             | REC 2.8V            |                    |                    |
|            |                       | PB 0V               |                    |                    |










Continued on next page

Continued from preceding page

| Pin number | Pin name                              | Standard DC voltage | Signal waveform                                                                                                     | Equivalent circuit                                                                              |
|------------|---------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 15         | PB<br>Y-FM/C-IN<br>C-IN<br>(FROM Pre) | REC 4.2V            | PB-Y-FM 400 mVp-p<br><br>A10289    | <br>A10290   |
|            |                                       | PB 3.2V             |                                                                                                                     |                                                                                                 |
| 16         | PM (R03)                              | REC 1.6V            | DC                                                                                                                  | <br>A10291   |
|            |                                       | PB 1.6V             |                                                                                                                     |                                                                                                 |
| 17         | PB-EQ-OUT                             | REC 2.6V            | FM 730 mVp-p                                                                                                        | <br>A10293  |
|            |                                       | PB 2.6V             | PB Y-FM 340 mVp-p<br><br>A10292  |                                                                                                 |
| 18         | REC-Y<br>FM-OUT                       | REC 1.9V            | PEC Y-FM 730 mVp-p<br><br>A10294 | <br>A10295 |
|            |                                       | PB 1.9V             |                                                                                                                     |                                                                                                 |
| 19         | REC-H-OUT                             | REC 4.2V            | DC                                                                                                                  | <br>A10296 |
|            |                                       | REC PAUSE<br>2.5V   |                                                                                                                     |                                                                                                 |
|            |                                       | EE or PB<br>0V      |                                                                                                                     |                                                                                                 |












Continued on next page

Continued from preceding page

| Pin number | Pin name                | Standard DC voltage | Signal waveform                                                                                   | Equivalent circuit                                                                                  |
|------------|-------------------------|---------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 20         | PB-Y-FM-IN<br>(FROM EQ) | REC 4.7V            | FM 700 mVp-p                                                                                      |  <p>A10298</p>   |
|            |                         | PB 2.5V             |  <p>A10297</p>   |                                                                                                     |
| 21         | AGC-TC2                 | REC 1.6V            | DC                                                                                                |  <p>A10299</p>   |
|            |                         | PB 1.7V             |                                                                                                   |                                                                                                     |
| 22         | PB-EMITTER<br>-PEAKING  | REC 0V              | DC                                                                                                |  <p>A10301</p>  |
|            |                         | PB 2.6V             |  <p>A10300</p> |                                                                                                     |
| 23         | MAIN-EMPH<br>OUT        | REC 2.1V            |  <p>A10302</p> |  <p>A10303</p> |
|            |                         | PB 0V               |                                                                                                   |                                                                                                     |
| 24         | MAIN-EMPH<br>FILTER     | REC 2.1V            |  <p>A10304</p> |  <p>A10305</p> |
|            |                         | PB 0V               | DC                                                                                                |                                                                                                     |









Continued on next page

Continued from preceding page

| Pin number | Pin name                   | Standard DC voltage | Signal waveform                                                                     | Equivalent circuit                                                                    |
|------------|----------------------------|---------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 25         | REC-Y                      | REC 1.6V            |    |    |
|            | MAIN-DE-EMPH. OUT          | PB 1.2V             |    |                                                                                       |
| 26         | CLAMP-IN                   | REC 2.9V            |    |    |
|            |                            | PB 2.8V             |    |                                                                                       |
| 27         | Y-GND                      | 0V                  |                                                                                     |                                                                                       |
| 28         | VIDEO-IN1                  | REC VSYNC 1.7V      |   |   |
|            |                            | PB 0V               | DC                                                                                  |                                                                                       |
| 29         | FBC-FILT (Feed Back Clamp) | REC 2.6V            | DC                                                                                  |  |
|            |                            | PB 2.6V             |                                                                                     |                                                                                       |
| 30         | VIDEO-IN2                  | REC VSYNC 1.7V      |  |  |
|            |                            | PB 0V               |                                                                                     |                                                                                       |









Continued on next page

Continued from preceding page

| Pin number | Pin name               | Standard DC voltage           | Signal waveform                                                                                                                     | Equivalent circuit                                                                                  |
|------------|------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 31         | REG                    | REC 4.1V                      | DC                                                                                                                                  |  <p>A10317</p>   |
|            |                        | PB 4.1V                       |                                                                                                                                     |                                                                                                     |
| 32         | VIDEO-IN3              | REC<br>V <sub>SYNC</sub> 1.7V |  <p>A10318</p>                                     |  <p>A10319</p>   |
|            |                        | PB 0V                         |                                                                                                                                     |                                                                                                     |
| 33         | QV/QH-INS<br>CHARA-INS |                               | <p>0 to 0.8V : Through</p> <p>1.0 to 2.2V : Character Ins.</p> <p>2.5 to 3.2V : QH Ins.</p> <p>3.8 to V<sub>CC</sub>V : QV Ins.</p> |  <p>A10320</p>  |
| 34         | VPS-OUT                | REC<br>V <sub>SYNC</sub> 1.7V |  <p>A10321</p>                                   |  <p>A10322</p> |
|            |                        | PB 0V                         |                                                                                                                                     |                                                                                                     |
| 35         | VIDEO-AGC-IN           | REC 2.3V                      |  <p>A10323</p>                                   |  <p>A10324</p> |
|            |                        | PB 3.1V                       |                                                                                                                                     |                                                                                                     |










Continued on next page

Continued from preceding page

| Pin number | Pin name          | Standard DC voltage    | Signal waveform                                                                     | Equivalent circuit                                                                    |
|------------|-------------------|------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 36         | Y-V <sub>CC</sub> | 5V                     | DC                                                                                  |                                                                                       |
| 37         | SYNC-OUT          |                        |    |    |
| 38         | VIDEO-OUT         | V <sub>SYNC</sub> 0.8V |    |    |
| 39         | VCA-FILT          | REC 3.1V               | DC                                                                                  |  |
|            |                   | PB 3.1V                |                                                                                     |                                                                                       |
| 40         | VCA-IN (CLAMP)    | REC 2.8V               |  |  |
|            |                   | PB 2.8V                |  |                                                                                       |
| 41         | V <sub>CC</sub> 2 | 5V                     | DC                                                                                  |                                                                                       |













Continued on next page

Continued from preceding page

| Pin number | Pin name      | Standard DC voltage        | Signal waveform                                                                                   | Equivalent circuit                                                                                  |
|------------|---------------|----------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 42         | Y-CCD-DRIVE   | REC 1.8V                   |  <p>A10333</p>   |  <p>A10335</p>   |
|            |               | PB 1.8V                    |  <p>A10334</p>   |                                                                                                     |
| 43         | NTSC-H OUT    | NTSC MODE<br>4.2V          | DC                                                                                                |  <p>A10336</p>   |
|            |               | WITHOUT<br>NTSC MODE<br>0V |                                                                                                   |                                                                                                     |
| 44         | PQ 2 (RO2)    | REC 1.7V                   | DC                                                                                                |  <p>A10337</p>  |
|            |               | PB 1.8V                    |                                                                                                   |                                                                                                     |
| 45         | PB CHROMA IN  | REC 1.8V                   |  <p>A10338</p> |  <p>A10339</p> |
|            |               | PB 1.9V                    |                                                                                                   |                                                                                                     |
| 46         | PB CHROMA OUT | REC 0V                     |  <p>A10340</p> |  <p>A10341</p> |
|            |               | PB 2.0V                    |                                                                                                   |                                                                                                     |












Continued on next page

Continued from preceding page

| Pin number | Pin name          | Standard DC voltage | Signal waveform                                                                             | Equivalent circuit                                                                           |
|------------|-------------------|---------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| 47         | C-V <sub>CC</sub> | 5V                  | DC                                                                                          |                                                                                              |
| 48         | C-CCD-DRIVE2      | REC 2.8V            |  A10342    |  A10344   |
|            |                   | PB 2.8V             |  A10343    |                                                                                              |
| 49         | SLD-FILT          | REC 4.0V            | DC                                                                                          |  A10345   |
|            |                   | PB 4.1V             |                                                                                             |                                                                                              |
| 50         | C-CCD-DRIVE 1     | REC 2.9V            |  A10346  |  A10348 |
|            |                   | PB 2.9V             |  A10347  |                                                                                              |
| 51         | AFC/APC-FILT      | REC 4.0V            |  A10349  |  A10351 |
|            |                   | PB 4.0V             |  A10350 |                                                                                              |
| 52         | C-CCD-IN          | 3.2V                |  A10352 |  A10353 |








Continued on next page

Continued from preceding page

| Pin number | Pin name       | Standard DC voltage | Signal waveform                                                                                    | Equivalent circuit                                                                                  |
|------------|----------------|---------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 53         | PA STOP-TR-SW  | 0V                  | DC                                                                                                 |  <p>A10354</p>   |
| 54         | REC-APC-FILTER | 2.1V                |  <p>A10355</p>    |  <p>A10356</p>   |
| 55         | VXO/XO-IN      | REC 4.0V            |  <p>A10358</p>   |  <p>A10359</p>  |
|            |                | PB 3.9V             |  <p>A10358</p> |                                                                                                     |
| 56         | VXO/XO-OUT     | REC 2.5V            |  <p>A10360</p> |  <p>A10362</p> |
|            |                | PB 2.5V             |  <p>A10361</p>  |                                                                                                     |
| 57         | C-GND          | 0V                  | DC                                                                                                 |                                                                                                     |
| 58         | 2 fsc/PB-H OUT | REC 1.5V            |  <p>A10363</p> |  <p>A10365</p> |
|            |                | PB 2.8V             |  <p>A10364</p> |                                                                                                     |










Continued on next page

Continued from preceding page

| Pin number | Pin name        | Standard DC voltage | Signal waveform                                                                                   | Equivalent circuit                                                                                  |
|------------|-----------------|---------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 59         | RL (RO4)        | REC 1.5V            | DC                                                                                                |  <p>A10366</p>   |
|            |                 | PB 1.5V             | DC                                                                                                |                                                                                                     |
| 60         | BGP-OUT         |                     | SYNC+BGP<br>SYNC 1.4V (typ)<br>BGP 4.0V or MORE                                                   |  <p>A10367</p>   |
| 61         | KILL-FILT       | Color 2.0V          | DC                                                                                                |  <p>A10368</p>  |
|            |                 | killer 3.0V         |                                                                                                   |                                                                                                     |
| 62         | ACK/SLD OUT     | ACK-OUT MODE        | KILLER MODE 4V or MORE<br>COLOR MODE 0V                                                           |  <p>A10370</p> |
|            |                 | SLD-OUT MODE        |  <p>A10369</p> |                                                                                                     |
| 63         | SERIAL-CLOCK-IN |                     |  <p>A10371</p> |  <p>A10372</p> |

Continued on next page

Continued from preceding page

| Pin number | Pin name          | Standard DC voltage | Signal waveform                                                                                    | Equivalent circuit                                                                                  |
|------------|-------------------|---------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 64         | SERIAL-DATA-IN    |                     |  <p>A10373</p>    |  <p>A10374</p>   |
| 65         | PQ1 (RO1)         | REC 1.6V            | DC                                                                                                 |  <p>A10375</p>   |
|            |                   | PB 1.6V             |                                                                                                    |                                                                                                     |
| 66         | C-ROTARY-PULSE-IN |                     |  <p>A10376</p>   |  <p>A10377</p>  |
| 67         | CSC-PULSE-IN      |                     |  <p>A10378</p> |  <p>A10379</p> |
| 68         | PAL-PULSE         | +45°<br>4V or MORE  |                                                                                                    |  <p>A10380</p> |
|            |                   | +45°<br>1V or LESS  |                                                                                                    |                                                                                                     |
| 69         | NC-CTL            | REC 2.1V            | DC                                                                                                 |  <p>A10381</p> |
|            |                   | PB 2.1V             |                                                                                                    |                                                                                                     |






Continued on next page

Continued from preceding page

| Pin number | Pin name                   | Standard DC voltage | Signal waveform  | Equivalent circuit |
|------------|----------------------------|---------------------|------------------|--------------------|
| 70         | A-MUTE-ON/OFF              | MUTE<br>3V or MORE  | DC               |                    |
| 71         | A-LINE-IN1                 | 3.3V                | REC CW, 95 mVp-p |                    |
|            |                            |                     | PB DC 3.3V       |                    |
| 72         | A-ALC-DET                  | 0V                  | REC: ADAPTIVE    |                    |
|            |                            |                     | PB DC 0V         |                    |
| 73         | A-LINE-IN2                 | 3.3V                | REC CW, 95 mVp-p |                    |
|            |                            |                     | PB DC 3.3V       |                    |
| 74         | A-V <sub>REF</sub> .FILTER | 3.3V                | DC               |                    |

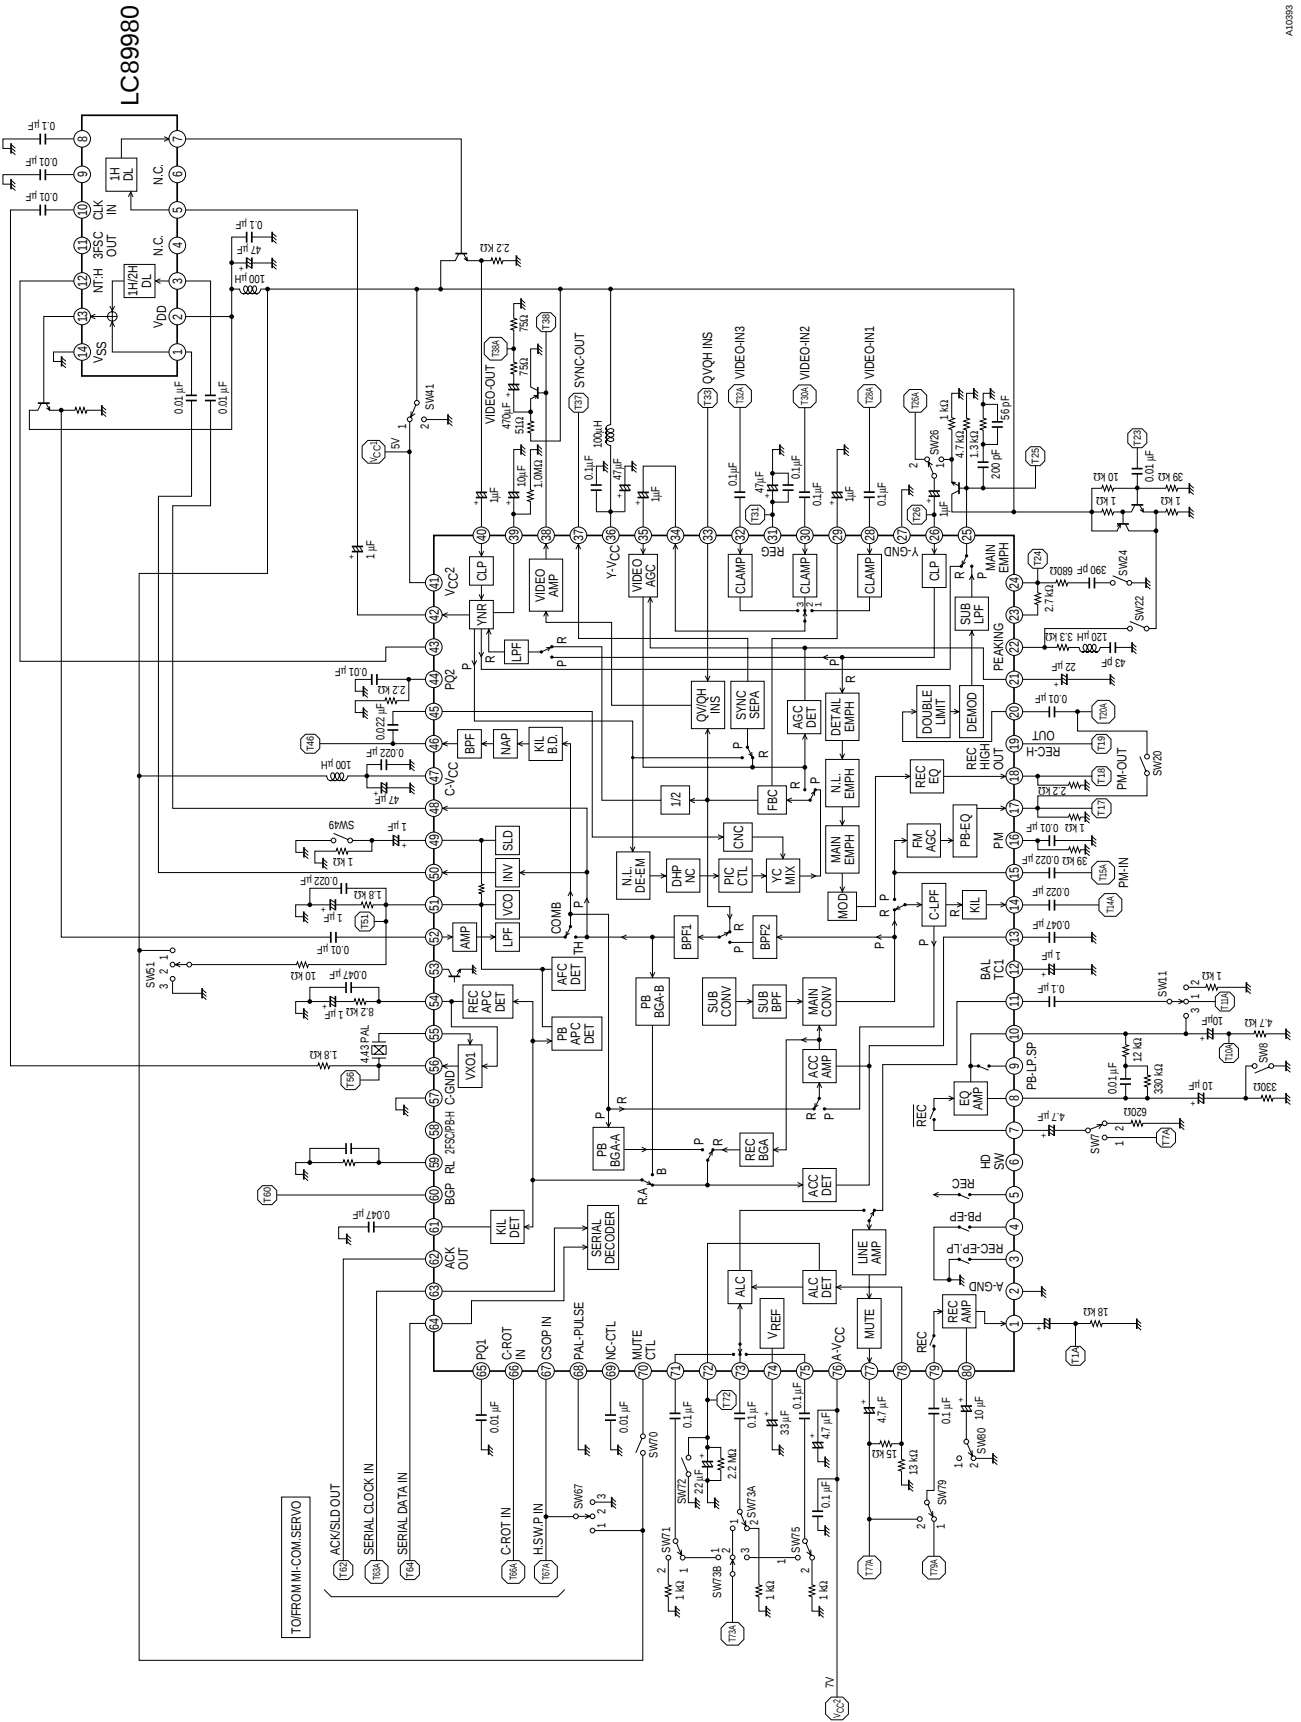
Continued on next page

Continued from preceding page

| Pin number | Pin name          | Standard DC voltage | Signal waveform   | Equivalent circuit                                                                                  |
|------------|-------------------|---------------------|-------------------|-----------------------------------------------------------------------------------------------------|
| 75         | A-LINE-IN3        | 3.3V                | REC CW, 95 mVp-p  |  <p>A10387</p>   |
|            |                   |                     | PB DC 3.3V        |                                                                                                     |
| 76         | A-V <sub>CC</sub> | 7V                  | DC                |                                                                                                     |
| 77         | A-LINE-OUT        | 3.3V                | CW, 1.4 Vp-p      |  <p>A10388</p>   |
| 78         | A-ALC DET-IN      | 0V                  | CW, 1.0 Vp-p      |  <p>A10389</p> |
| 79         | A-REC-IN          | 3.3V                | REC CW, 745 mVp-p |  <p>A10390</p> |
|            |                   |                     | PB DC 3.3V        |                                                                                                     |
| 80         | A-REC-NFB         | 3.3V                | REC CW 745 mVp-p  |  <p>A10391</p> |
|            |                   |                     | PB DC 3.3V        |                                                                                                     |

[illegible]

## Test Circuit Diagram



- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1999. Specifications and information herein are subject to change without notice.