

MITSUBISHI ELEK (LINEAR) 62E D

M54472L

1/64 HIGH SPEED DIVIDER WITH ECL OUTPUT

DESCRIPTION

The M54472L is a semiconductor integrated circuit consisting of a high-speed 1/64 divider using emitter-coupled logic.

FEATURES

- High-speed operation ($f_{max}=1.1\text{GHz}$)
- Operates at low input amplitude (150mVp-p min)
- ECL level output

APPLICATION

Prescalers for PLL synthesized TV tuners, and general use in industrial and consumer digital equipment.


RECOMMENDED OPERATING CONDITION

Supply voltage range.....4.5~5.5V
 Input Frequency.....80~1,100MHz
 Input amplitude150~1000mVp-p
 (Vcc=5V, $f_{in}=80\sim 1100\text{MHz}$, $T_a=25^\circ\text{C}$)

FUNCTION


The M54472L consists of a divider using emitter-coupled logic. When a frequency from 80 through 1,100MHz is applied to the input pin T, the 1/64 divided frequency is obtained. Output Q is the ECL level.

PIN CONFIGURATION (TOP VIEW)

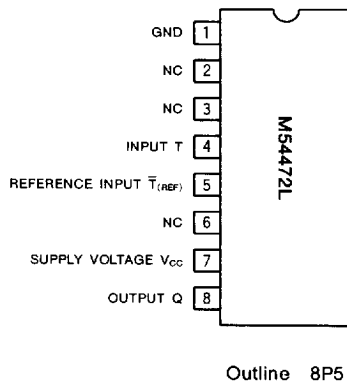

NC : No connection

BLOCK DIAGRAM

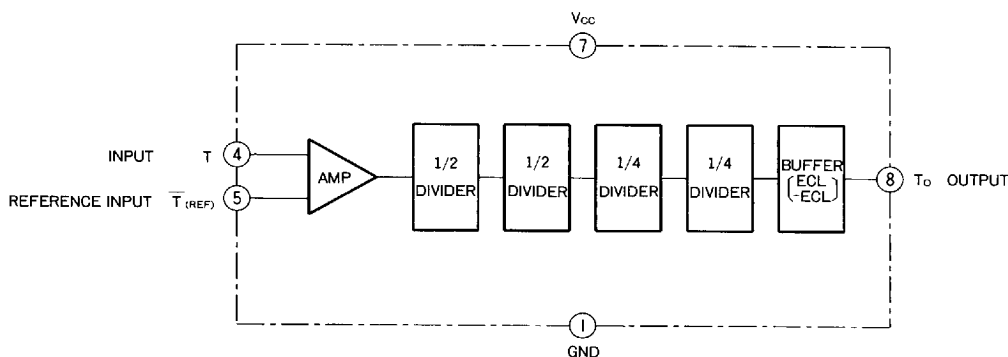

1/64 HIGH SPEED DIVIDER WITH ECL OUTPUT


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Ratings	Unit
V_{CC}	Supply voltage		V
V_I	Input voltage	V_{CC}	V
P_d	Power dissipation	1.33	W
T_{opr}	Operating temperature	-10~75	°C
T_{stg}	Storage temperature	-55~125	°C

ELECTRICAL CHARACTERISTICS ($T_a = -10 \sim 75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I_{CC}	Supply current	$V_{CC} = 5\text{V}$	40	47	60	mA
V_{IN}	Input amplitude	$V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$ $f_{IN} = 80\text{MHz} \sim 1100\text{MHz}$			150	mV _{P-P}
V_O	Output amplitude	$V_{CC} = 5\text{V}$	0.6			V _{P-P}

TEST CIRCUIT

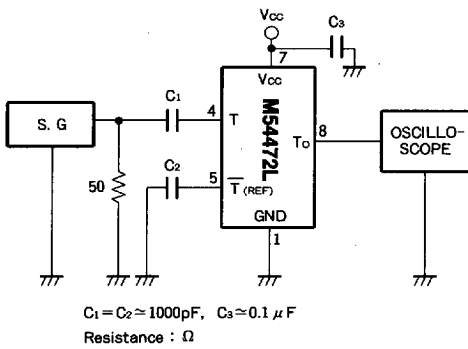

TYPICAL CHARACTERISTICS

INPUT AMPLITUDE VS INPUT FREQUENCY

