




SWITCHING AND AMPLIFIER

ABSOLUTE MAXIMUM RATINGS ($T_a=25$)

- T_{stg} —Storage Temperature..... -55~150
- T_j —Junction Temperature.....150
- P_C —Collector Dissipation.....500mW
- V_{CBO} —Collector-Base Voltage.....-80V
- V_{CEO} —Collector-Emitter Voltage.....-65V
- V_{EBO} —Emitter-Base Voltage.....-5V
- I_C —Collector Current.....-100mA

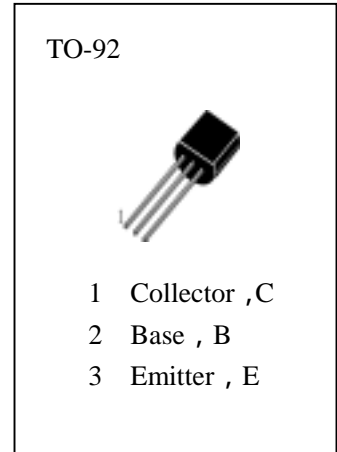

ELECTRICAL CHARACTERISTICS ($T_a=25$)

Symbol	Characteristics	Min	Typ	Max	Unit	Test Conditions
I_{CBO}	Collector Cut-off Current			-15	nA	$V_{CB}=-30V, I_E=0$
HFE	DC Current Gain	110		800		$V_{CE}=-5V, I_C=-2mA$
$V_{CE(sat1)}$	Collector- Emitter Saturation Voltage		-90	-300	mV	$I_C=-10mA, I_B=-0.5mA$
$V_{CE(sat2)}$			-250	-650	mV	$I_C=-100mA, I_B=-5mA$
$V_{BE(sat1)}$	Base-Emitter Saturation Voltage		-0.7		V	$I_C=-10mA, I_B=-0.5mA$
$V_{BE(sat2)}$			-0.9		V	$I_C=-100mA, I_B=-5mA$
$V_{BE(ON)}$	Base-Emitter On Voltage	-600	-660	-750	mV	$V_{CE}=-5V, I_C=-2mA$
f_T	Current Gain-Bandwidth Product		150		MHz	$V_{CE}=-5V, I_C=-10mA$ $f=100MHz$
NF	Noise Figure		2	10	dB	$V_{CE}=-5V, I_C=-200 \mu A$ $f=1KHz, R_g=2K$

hFE Classification

A	B	C
110—220	200—450	420—800

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.