




H649A

LOW FREQUENCY POWER AMPLIFIER

ABSOLUTE MAXIMUM RATINGS ($T_a=25$)

T_{stg}	Storage Temperature.....	-55~150
T_j	Junction Temperature.....	150
P_C	Collector Dissipation ($T_c=25$)	20W
P_C	Collector Dissipation ($T_A=25$)	1W
V_{CBO}	Collector-Base Voltage.....	-180V
V_{CEO}	Collector-Emitter Voltage.....	-160V
V_{EBO}	Emitter-Base Voltage.....	-5V
I_C	Collector Current (DC)	-1.5A

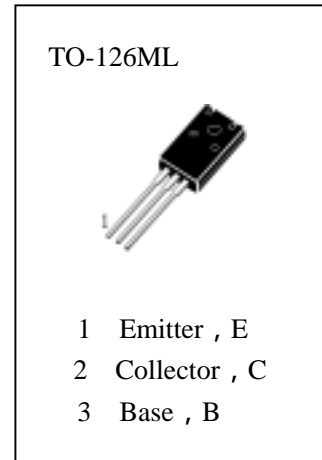

Electrical Characteristics ($T_a=25$)

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
$H_{FE} (1)$	DC Current Gain	60		200		$V_{CE} = -5V, I_C = -150mA$
$H_{FE} (2)$		30				$V_{CE} = -5V, I_C = -500mA$
$V_{CE(sat)}$	Collector- Emitter Saturation Voltage			-1	V	$I_C = -500mA, I_B = -50mA$
BV_{CBO}	Collector-Base Breakdown Voltage	-180			V	$I_C = -1mA, I_E = 0$
BV_{CEO}	Collector-Emitter Breakdown Voltage	-160			V	$I_C = -10mA, I_B = 0$
BV_{EBO}	Emitter- Base Breakdown Voltage	-5			V	$I_E = -1mA, I_C = 0$
I_{CBO}	Collector-Base Cutoff Current			-10	μA	$V_{CB} = -160V, I_E = 0$
f_T	Current Gain- Bandwidth Product		140		MHz	$V_{CE} = -5V, I_C = -150mA$
C_{ob}	Output Capacitance		27		pF	$V_{CB} = -10V, I_E = 0, f = 1MHz$

h_{FE} Classification

B	C
60—120	100—200

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.