




1W OUTPUT AMPLIFIER OF POTABLE RADIOS IN CLASS

B PUSH-PULL OPERATION.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

- Tstg—Storage Temperature..... -55~150°C
Tj—Junction Temperature.....150°C
Pc—Collector Dissipation.....625mW
Vcbo—Collector-Base Voltage.....-40V
Vceo—Collector-Emitter Voltage.....-20V
Vebo—Emitter-Base Voltage.....-5V
Ic—Collector Current.....-500mA

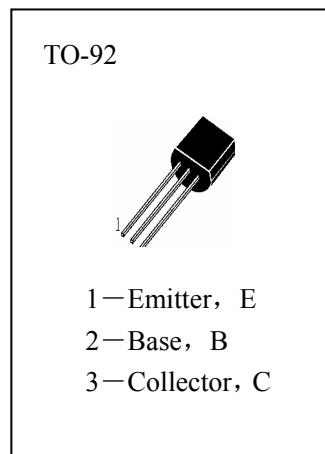

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Table with 7 columns: Symbol, Characteristics, Min, Typ, Max, Unit, Test Conditions. Rows include ICBO, IEBO, HFE(1), HFE(2), VCE(sat), VBE(sat), VBE(ON), BVcbo, BVCEO, and BVEBO.

hFE Classification

Table with 5 columns: E, F, G, H, I. Row 1: 78—112, 96—135, 112—166, 144—202, 176—246



Typical Characteristics

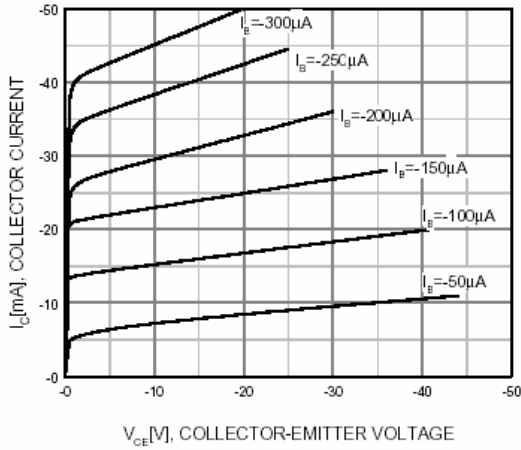


Figure 1. Static Characteristic

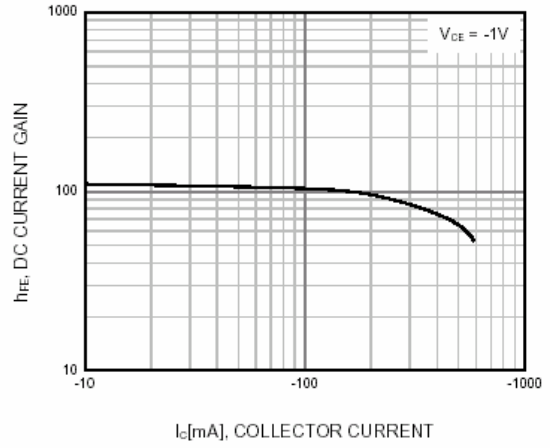


Figure 2. DC current Gain

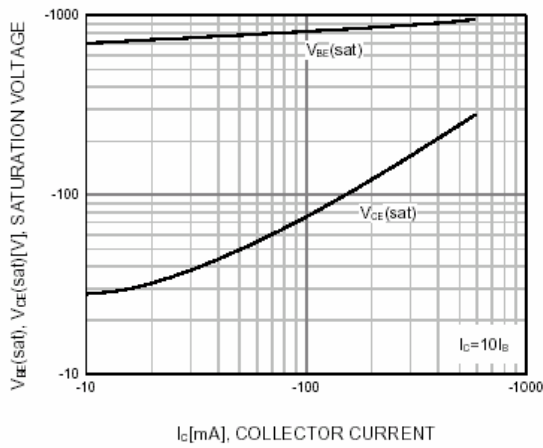


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

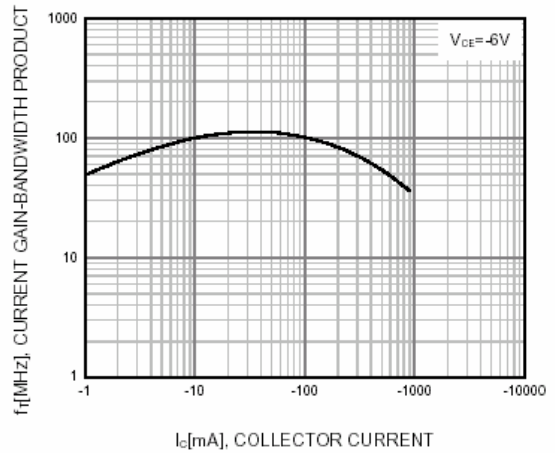


Figure 4. Current Gain Bandwidth Product

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.