

TOSHIBA TRANSISTOR SILICON PNP EPITAXIAL TYPE (PCT PROCESS)


RN2507, RN2508, RN2509

SWITCHING, INVERTER CIRCUIT, INTERFACE CIRCUIT
AND DRIVER CIRCUIT APPLICATIONS.


Unit in mm

- Including Two Devices in SMV (Super Mini Type with 5 leads)
- With Built-in Bias Resistors
- Simplify Circuit Design
- Reduce a Quantity of Parts and Manufacturing Process
- Complementary to RN1507~RN1509

EQUIVALENT CIRCUIT AND BIAS RESISTOR VALUES




TYPE No.	R1 (k Ω)	R2 (k Ω)
RN2507	10	47
RN2508	22	47
RN2509	47	22

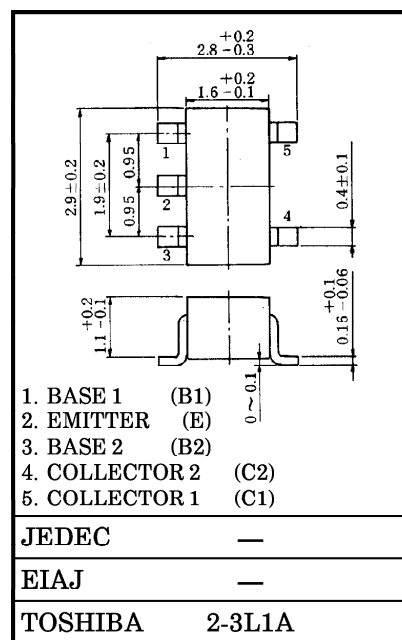

Weight : 0.014g

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATINGS (Ta = 25°C) (Q1, Q2 COMMON)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	RN2507~2509	V_{CBO}	-50	V
Collector-Emitter Voltage		V_{CEO}	-50	V
Emitter-Base Voltage	RN2507	V_{EBO}	-6	V
	RN2508		-7	
	RN2509		-15	
Collector Current	RN2507~2509	I_C	-100	mA
Collector Power Dissipation		P_C^*	300	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55~150	°C

* : Total Rating







961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing a TOSHIBA product, to observe standard safety and handling practices and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.




ELECTRICAL CHARACTERISTICS (Ta = 25°C) (Q1, Q2 COMMON)



CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	RN2507~2509	I_{CBO}	$V_{CB} = -50V, I_E = 0$	—	—	-100	nA
		I_{CEO}	$V_{CE} = -50V, I_B = 0$	—	—	-500	nA
Emitter Cut-off Current	RN2507	I_{EBO}	$V_{EB} = -6V, I_C = 0$	-0.081	—	-0.15	mA
	RN2508		$V_{EB} = -7V, I_C = 0$	-0.078	—	-0.145	
	RN2509		$V_{EB} = -15V, I_C = 0$	-0.167	—	-0.311	
DC Current Gain	RN2507	h_{FE}	$V_{CE} = -5V, I_C = -10mA$	80	—	—	
	RN2508			80	—	—	
	RN2509			70	—	—	
Collector-Emitter Saturation Voltage	RN2507~2509	$V_{CE(sat)}$	$I_C = -5mA, I_B = -0.25mA$	—	-0.1	-0.3	V
Input Voltage (ON)	RN2507	$V_{I(ON)}$	$V_{CE} = -0.2V, I_C = -5mA$	-0.7	—	-1.8	V
	RN2508			-1.0	—	-2.6	
	RN2509			-2.2	—	-5.8	
Input Voltage (OFF)	RN2507	$V_{I(OFF)}$	$V_{CE} = -5V, I_C = -0.1mA$	-0.5	—	-1.0	V
	RN2508			-0.6	—	-1.16	
	RN2509			-1.5	—	-2.6	
Transition Frequency	RN2507~2509	f_T	$V_{CE} = -10V, I_C = -5mA$	—	200	—	MHz
Collector Output Capacitance	RN2507~2509	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	—	3	6	pF
Input Resistor	RN2507	R1		7	10	13	kΩ
	RN2508			15.4	22	28.6	
	RN2509			32.9	47	61.1	
Resistor Ratio	RN2507	R1 / R2		0.191	0.213	0.232	
	RN2508			0.421	0.468	0.515	
	RN2509			1.92	2.14	2.35	

(Q1, Q2 COMMON)

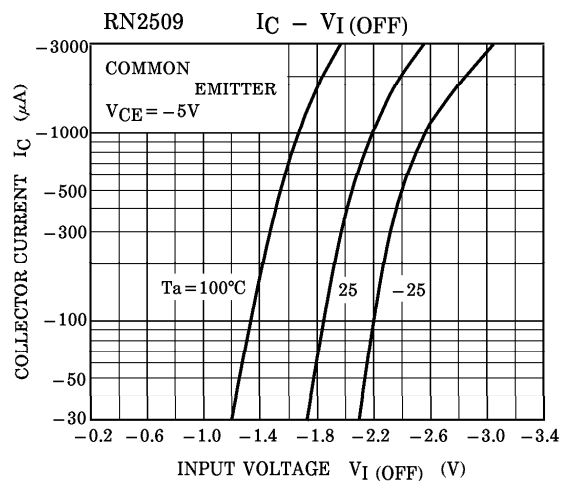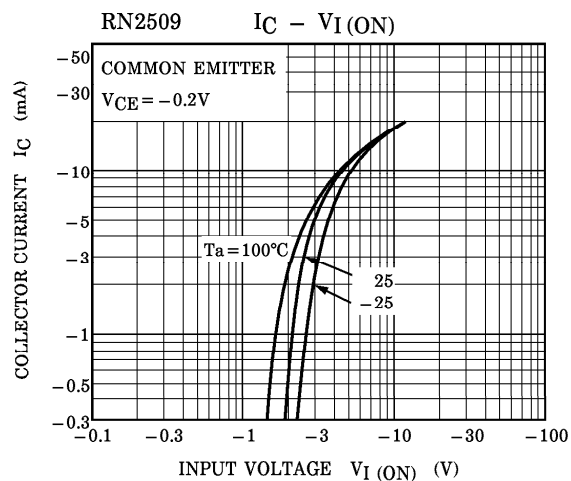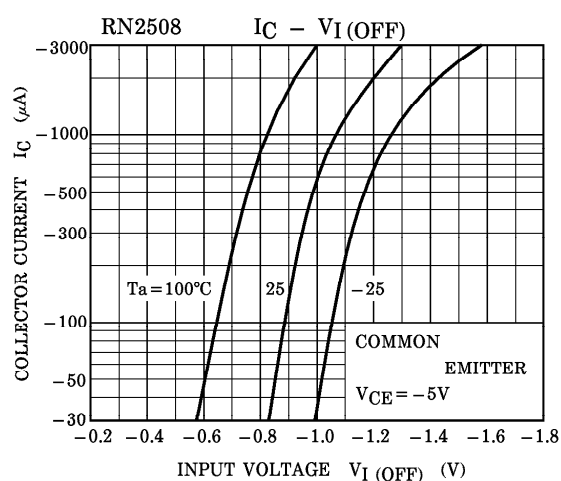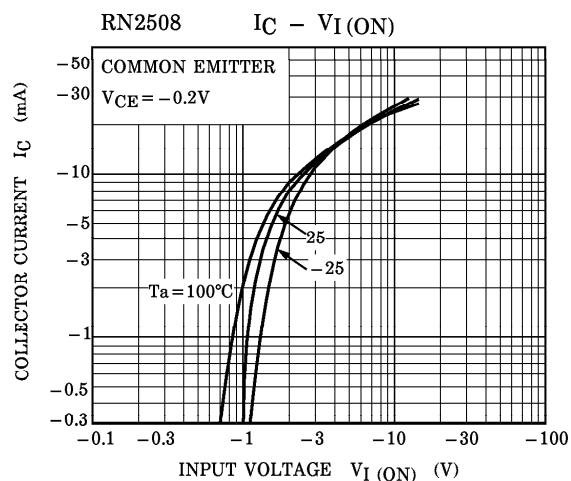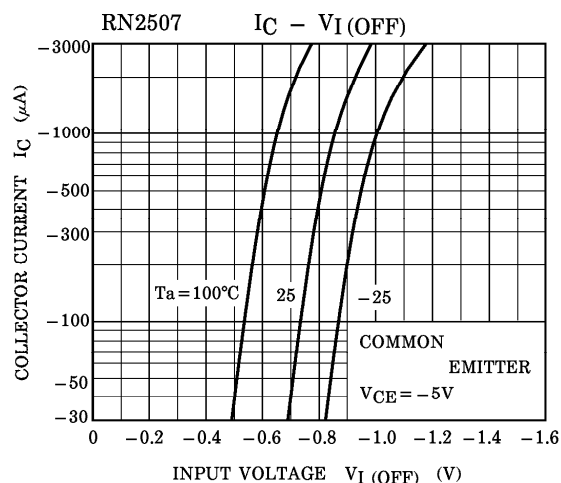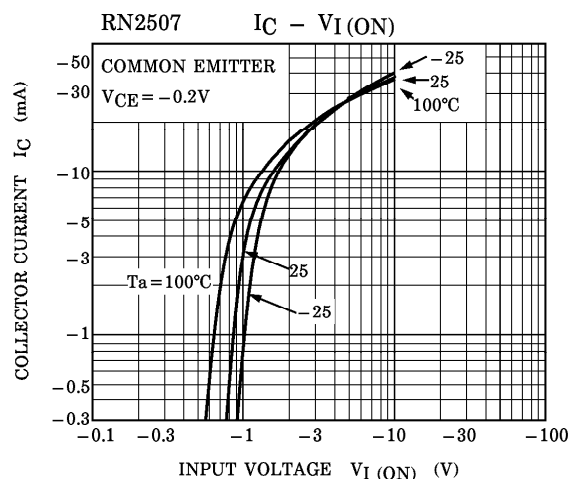

(Q1, Q2 COMMON)

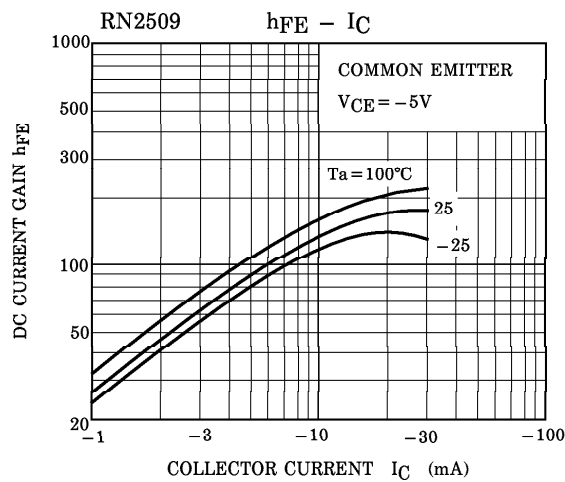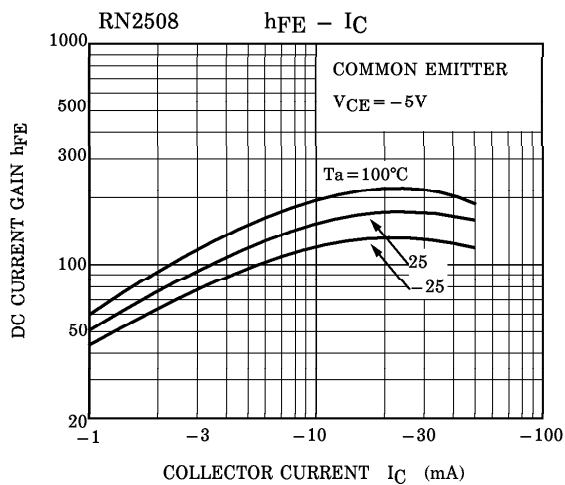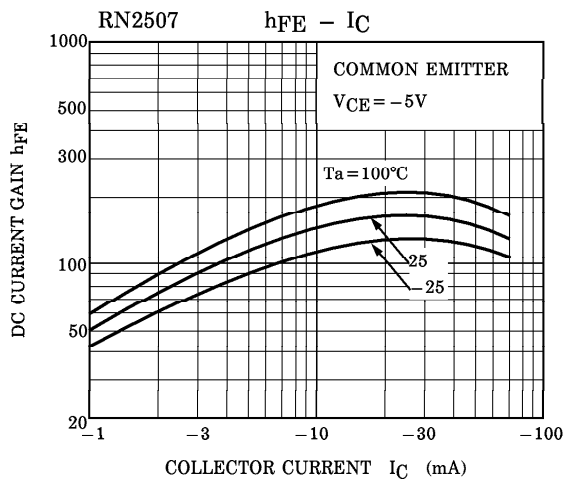

TYPE NAME	MARKING
RN2507	
RN2508	
RN2509	