

**SANYO****STK4214MK2**Thick Film Hybrid IC  
2-Channel AF Power Amp**TENTATIVE**

Case Outline : 26 pins (See attached case outline drawing.)

Function : 2-channel AF power amp

Use : 70W audio use

Feature : Built-in protection relay driver

Maximum Ratings at  $T_a = 25^\circ\text{C}$ 


			unit
Supply Voltage	$V_{CC}$	$\pm 61$	V
Thermal Resistance	$\theta_{j-c}$	1.5	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Operating Case Temperature	$T_C$	125	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-30 to +125	$^\circ\text{C}$
Available Time for Load Shorted	t	$V_{CC} = \pm 42\text{V}, R_L = 8\Omega, f = 50\text{Hz}, P_o = 70\text{W}$	0.5 sec
Protection Detection Ratings		See the next page.	

Operating Characteristics at  $T_a = 25^\circ\text{C}, R_L = 8\Omega, R_g = 600\Omega, V_G = 40\text{dB}$ ,

			min	typ	max	unit
Output Power	$P_o$	$R_L$ : Non-inductive load $V_{CC} = \pm 42\text{V}, f = 20\text{Hz to } 20\text{kHz},$ $\text{THD} = 0.4\%$	70			W
Total Harmonic Distortion	THD	$V_{CC} = \pm 42\text{V}, f = 1\text{kHz}, P_o = 1.0\text{W}$			0.4	%
Frequency Characteristic	$f_L, f_H$	$V_{CC} = \pm 42\text{V}, P_o = 1.0\text{W}, \pm_3^0 \text{dB}$		20 to 50k		Hz
Input Impedance	$r_i$	$V_{CC} = \pm 42\text{V}, f = 1\text{kHz}, P_o = 1.0\text{W}$		55		k $\Omega$
Output Noise Voltage	$V_{NO}$	$V_{CC} = \pm 50.5\text{V}, R_g = 10\text{k}\Omega$			1.2	mVrms
Quiescent Current	$I_{CCO}$	$V_{CC} = \pm 50.5\text{V}$	20	40	100	mA
Midpoint Voltage	$V_N$	$V_{CC} = \pm 50.5\text{V}$	-70	0	+70	mV
Current Detection Voltage	$\pm \text{DC}$			$\pm 2.2$		V
Available Time for Load Shorted	t	$V_{CC} = \pm 42\text{V}, f = 1\text{kHz}, P_o = 1.0\text{W}$			0.5	sec

**Remarks**

- For power supply at the time of test, use a constant-voltage power supply unless otherwise specified.
- For measurement of the available time for load shorted and output noise voltage, use the specified transformer power supply shown below.
- The output noise voltage is represented by the peak value on rms scale (VTVM) of average value indicating type. For AC power supply, use an AC stabilized power supply (50Hz) to eliminate the effect of flicker noise in AC primary line.

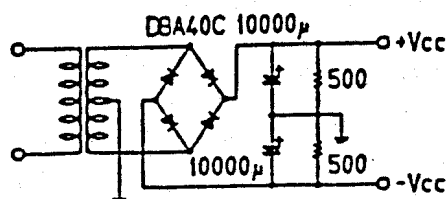Specified transformer power supply.  
(Equivalent to MG-250)

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced. The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use.

Specifications and information herein are subject to change without notice.

**SANYO Electric Co., Ltd. Semiconductor Overseas Marketing Div.**  
 Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN


7049VT TS STK4214MK2-1/4

# STK4214MK2

※ Maximum Ratings for Protection Detection at  $T_c = 25^\circ\text{C}$

Parameter	Symbol	Value	unit	Remarks
Relay Driver Voltage	$V_R$	60	V	Pin 14 supply voltage
Relay Driver Current	$I_6$	130	mA	Pin 14 current
IC <sub>1</sub> Allowable Power Dissipation	$P_d$	500	mW	
Pin 18 Current	$I_1$	±1.0	mA	
Pin 17 Current	$I_2$	±1.0	mA	
Pin 13 Current	$I_7$	+1.0	mA	
Pin 15 Current	$I_9$	+5.0	mA	

Internal Equivalent Circuit (STK4214MK2)

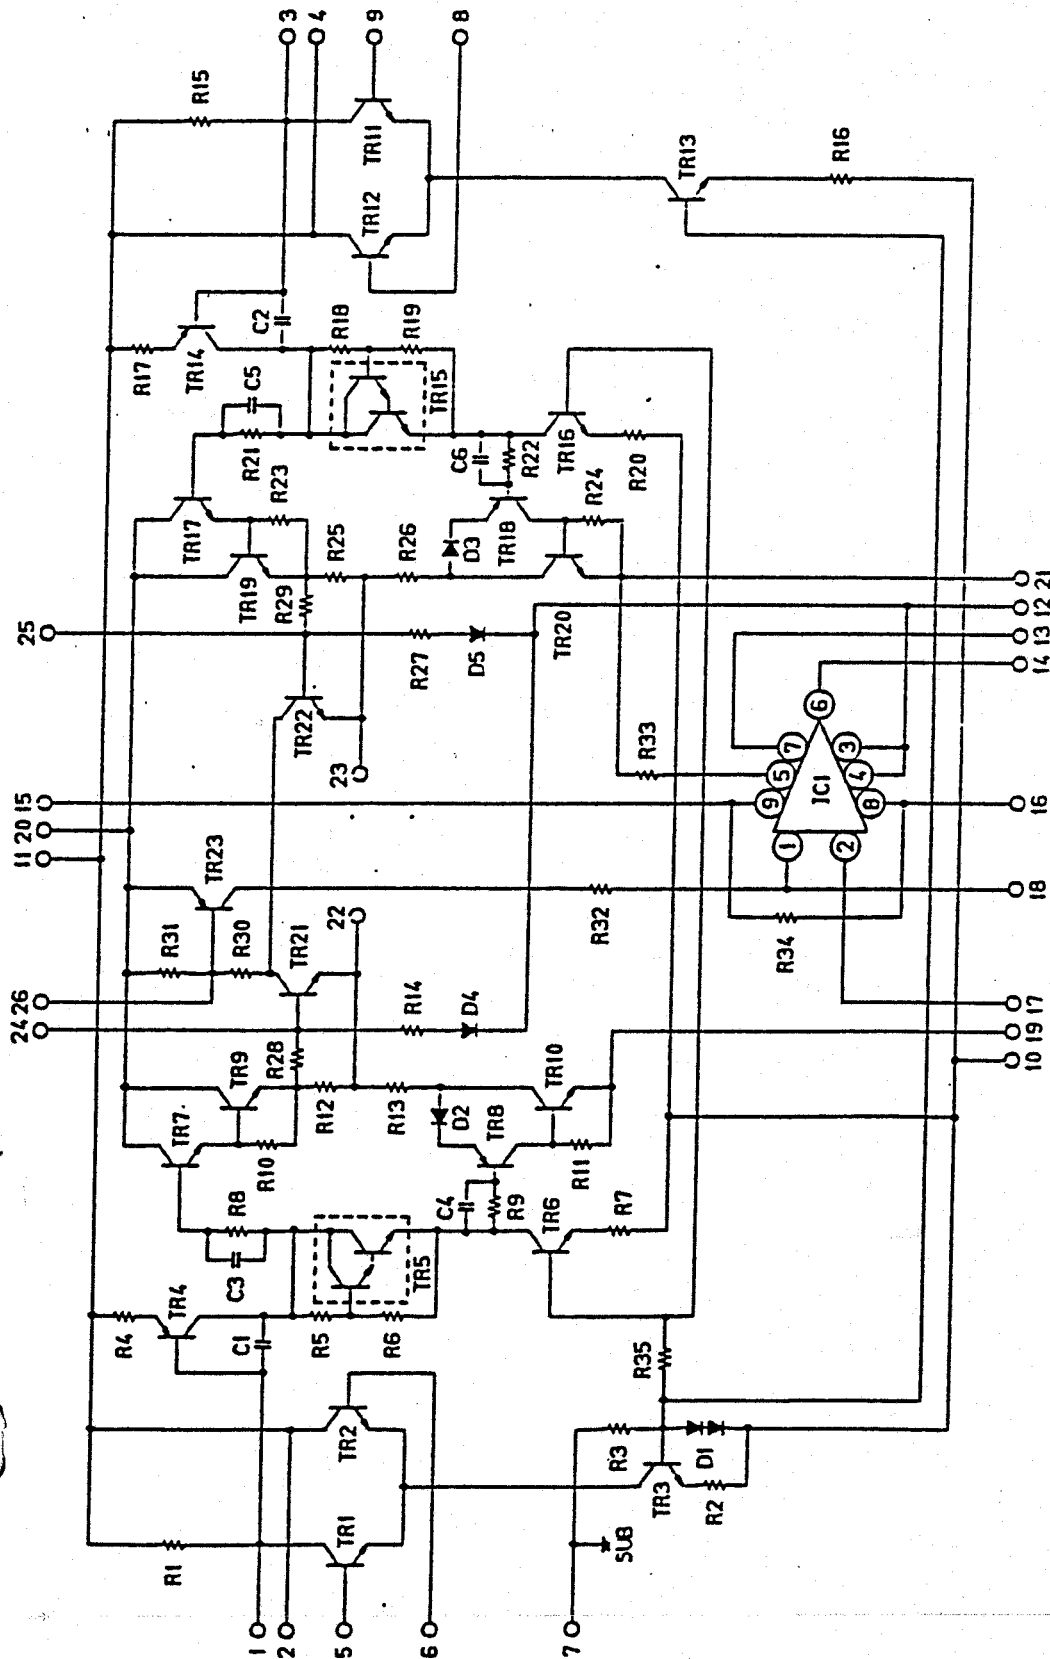



# STK4214MK2

Case Outline (unit : mm)

