

**CA741, CA747, CA748, CA1458, CA1558,
LM741*, LM748*, LM1458*, LM1558***

T-79-05-20

Operational Amplifiers

High-Gain Single and Dual Operational Amplifiers
For Military, Industrial and Commercial Applications

Features:

- *Input bias current (all types):*
500 nA max.
- *Input offset current (all types):*
200 nA max.

The RCA-CA1458, CA1558 (dual types); CA741C, CA741 (single-types); CA747C, CA747 (dual types); and CA748C, CA748 (single types) are general-purpose, high-gain operational amplifiers for use in military, industrial, and commercial applications.

These monolithic silicon integrated-circuit devices provide output short-circuit protection and latch-free operation. These types also feature wide common-mode and differential-mode signal ranges and have low-offset voltage nulling capability when used with an appropriately valued potentiometer. A 5-megohm potentiometer is used for offset nulling types CA748C, CA748 (See Fig. 10); a 10-kilohm potentiometer is used for offset nulling types CA741C, CA741, CA747CE, CA747E (See Fig. 9); and types CA1458, CA1558, CA747CT, have no specific terminals for offset nulling. Each type consists of a differential-input amplifier that effectively drives a gain and level-shifting stage having a complementary emitter-follower output.

RCA's manufacturing process make it possible to produce IC operational amplifiers with low-burst ("popcorn") noise characteristics. Type CA6741, a low-noise version of the CA741, gives limit specifications for burst noise in the data

Applications:

- *Comparator*
- *DC amplifier*
- *Integrator or differentiator*
- *Multivibrator*
- *Narrow-band or band-pass filter*
- *Summing amplifier*

bulletin, File No. 530. Contact your RCA Sales Representative for information pertinent to other operational amplifier types that meet low-burst noise specifications.

This operational amplifier line also offers the circuit designer the option of operation with internal or external phase compensation.

Types CA748C and CA748, which are externally phase compensated (terminals 1 and 8) permit a choice of operation for improved bandwidth and slew-rate capabilities. Unity gain with external phase compensation can be obtained with a single 30-pF capacitor. All the other types are internally phase-compensated.

RCA Type No.	No. of Ampl.	Phase Comp.	Offset Voltage Null	Min. A _{OL}	Max. V _{IO} (mV)	Operating-Temperature Range (°C)
CA1458	dual	int.	no	20k	6	0 to +70 ^A
CA1558	dual	int.	no	50k	5	-55 to +125
CA741C	single	int.	yes	20k	6	0 to +70 ^A
CA741	single	int.	yes	50k	5	-55 to +125
CA747C	dual	int.	yes*	20k	6	0 to +70 ^A
CA747	dual	int.	yes*	50k	5	-55 to +125
CA748C	single	ext.	yes	20k	6	0 to +70 ^A
CA748	single	ext.	yes	50k	5	-55 to +125

*In the 14-lead dual-in-line plastic package only.

^AAll types in any package style can be operated over the temperature range of -55 to +125°C, although the published limits for certain electrical specifications apply only over the temperature range of 0 to +70°C.

*Technical Data on LM Branded types is identical to the corresponding CA Branded types.

3875081 G E SOLID STATE

01E 14177 D

Operational Amplifiers

**CA741, CA747, CA748, CA1458, CA1558,
LM741, LM748, LM1458, LM1558**

T-79-05-20

ORDERING INFORMATION

When ordering any of these types, it is important that the appropriate suffix letter for the package required be affixed to the type number. For example: If a CA1458 in a straight-lead TO-5 style package is desired, order CA1458T.

TYPE NO.	PACKAGE TYPE AND SUFFIX LETTER							FIG. NO.
	TO-5 STYLE			PLASTIC		CHIP	BEAM- LEAD	
	8L	10L	DIL- CAN	8L	14L			
CA1458	T		S	E		H		1d, 1h
CA1558	T		S	E				1d, 1h
CA741C	T		S	E		H		1a, 1e
CA741	T		S	E			L	1a, 1e
CA747C		T			E	H		1b, 1f
CA747		T			E			1b, 1f
CA748C	T		S	E		H		1c, 1g
CA748	T		S	E				1c, 1g

MAXIMUM RATINGS, Absolute-Maximum Values at $T_A = 25^\circ\text{C}$:DC Supply Voltage (between V^+ and V^- terminals):CA741C, CA747C[▲], CA748C, CA1458[▲] 36 VCA741, CA747[▲], CA748, CA1558[▲] 44 VDifferential Input Voltage ± 30 VDC Input Voltage* ± 15 V

Output Short-Circuit Duration Indefinite

Device Dissipation:

Up to 70°C (CA741C, CA748C) 500 mWUp to 75°C (CA741, CA748) 500 mWUp to 30°C (CA747) 800 mWUp to 25°C (CA747C) 800 mWUp to 30°C (CA1558) 680 mWUp to 25°C (CA1458) 680 mWFor Temperatures Indicated Above Derate linearly 6.67 mW/ $^\circ\text{C}$ Voltage between Offset Null and V^- (CA741C, CA741, CA747CE) ± 0.5 V

Ambient Temperature Range:

Operating — CA741, CA747E, CA748, CA1558 -55 to $+125^\circ\text{C}$ CA741C, CA747C, CA748C, CA1458 0 to $+70^\circ\text{C}^\dagger$ Storage -65 to $+150^\circ\text{C}$

Lead Temperature (During Soldering):

At distance $1/16 \pm 1/32$ inch (1.59 ± 0.79 mm) from case for 10 seconds max. 265°C


* If Supply Voltage is less than ± 15 volts, the Absolute Maximum Input Voltage is equal to the Supply Voltage.

[▲] Voltage values apply for each of the dual operational amplifiers.


[†] All types in any package style can be operated over the temperature range of -55 to $+125^\circ\text{C}$, although the published limits for certain electrical specifications apply only over the temperature range of 0 to $+70^\circ\text{C}$.

CA741, CA747, CA748, CA1458, CA1558, LM741, LM748, LM1458, LM1558


T-79-05-20




1a.—CA741CS, CA741CT, CA741S, &
CA741T with internal phase
compensation.




1b.—CA747CT and CA747T with
internal phase compensation.




1c.—CA748CS, CA748CT, CA748S,
and CA748T with external
phase compensation.




1d.—CA1458S, CA1458T, CA1558S,
and CA1558T and internal
phase compensation.




1e.—CA741C and CA741E with
internal phase compensation.

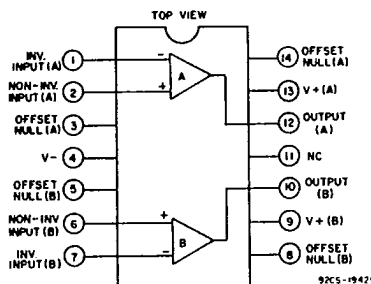

1f.—CA747CE and CA747E with
internal phase compensation.



1g.—CA748CE and CA748E with
external phase compen-
sation.



1h.—CA1458E and CA1558E with
internal phase compensation.

Fig. 1 — Functional diagrams.

Operational Amplifiers

CA741, CA747, CA748, CA1458, CA1558,
LM741, LM748, LM1458, LM1558

T-79-05-20

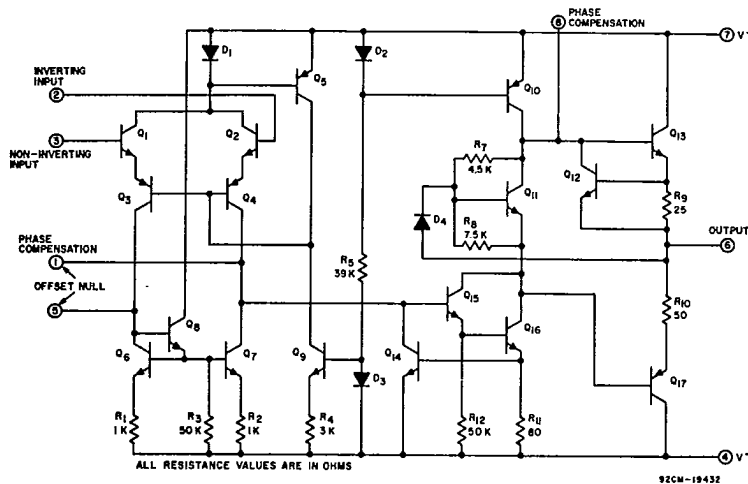


Fig.2—Schematic diagram of operational amplifier with external phase compensation for CA748C and CA748.

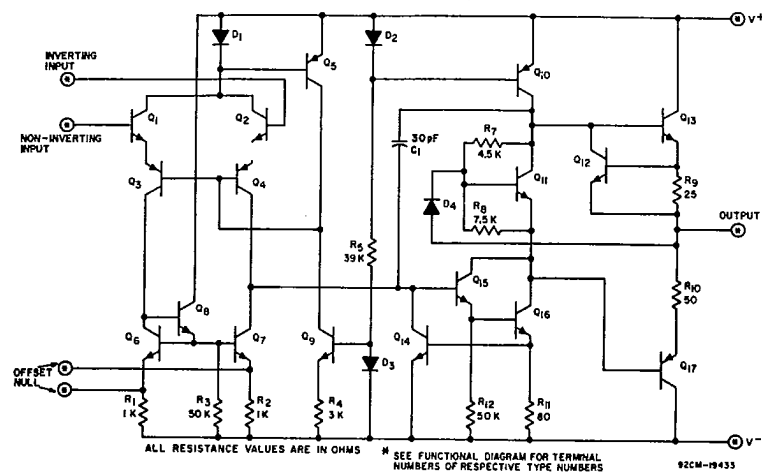


Fig.3—Schematic diagram of operational amplifiers with internal phase compensation for CA741C, CA741, and for each amplifier of the CA747C, CA747, CA1458, and CA1558.

CA741, CA747, CA748, CA1458, CA1558, LM741, LM748, LM1458, LM1558

T-79-05-20

ELECTRICAL CHARACTERISTICS

Typical Values Intended Only for Design Guidance

CHARACTERISTIC	TEST CONDITIONS $V_{\pm} = \pm 15 \text{ V}$	TYP. VALUES ALL TYPES	UNITS
Input Capacitance, C_i		1.4	pF
Offset Voltage Adjustment Range		± 15	mV
Output Resistance, R_O		75	Ω
Output Short-Circuit Current		25	mA
Transient Response:	Unity gain $V_i = 20 \text{ mV}$ $R_L = 2 \text{ k}\Omega$ $C_L \leq 100 \text{ pF}$		
Rise Time, t_r		0.3	μs
Overshoot		5	%
Slew Rate, SR:	$R_L \geq 2 \text{ k}\Omega$		
Closed-loop		0.5	V/ μs
Open-loop [▲]		40	

▲ Open-loop slew rate applies only for types CA748C and CA748.

ELECTRICAL CHARACTERISTICS

For Equipment Design

CHARACTERISTIC	TEST CONDITIONS Supply Voltage, V ⁺ = 15 V, V ⁻ = -15 V		LIMITS			UNITS
			CA741C CA747C* CA748C CA1458*			
	Ambient Temperature, T _A	Min.	Typ.	Max.		
Input Offset Voltage, V _{IO}	R _S = ≤ 10 kΩ	25 °C	—	2	6	mV
		0 to 70 °C	—	—	7.5	
Input Offset Current, I _{IO}		25 °C	—	20	200	nA
		0 to 70 °C	—	—	300	
Input Bias Current, I _{IB}		25 °C	—	80	500	nA
		0 to 70 °C	—	—	800	
Input Resistance, R _I			0.3	2	—	MΩ
Open-Loop Differential Voltage Gain, A _{OL}	R _L ≥ 2 kΩ V _O = ±10 V	25 °C	20,000	200,000	—	
		0 to 70 °C	15,000	—	—	
Common-Mode Input Voltage Range, V _{ICR}		25 °C	±12	±13	—	V
Common-Mode Rejection Ratio, CMRR	R _S ≤ 10 kΩ	25 °C	70	90	—	dB
Supply-Voltage Rejection Ratio, PSRR	R _S ≤ 10 kΩ	25 °C	—	30	150	μV/V
Output Voltage Swing, V _{OPP}	R _L ≥ 10 kΩ	25 °C	±12	±14	—	V
		25 °C	±10	±13	—	
	R _L ≥ 2 kΩ	0 to 70 °C	±10	±13	—	
Supply Current, I [±]		25 °C	—	1.7	2.8	mA
Device Dissipation, P _D		25 °C	—	50	85	mW

* Values apply for each section of the dual amplifiers.

Operational Amplifiers

**CA741, CA747, CA748, CA1458, CA1558,
LM741, LM748, LM1458, LM1558**

T-79-05-20

ELECTRICAL CHARACTERISTICS
For Equipment Design

CHARACTERISTIC	TEST CONDITIONS Supply Voltage, V ⁺ = 15 V, V ⁻ = -15 V	Ambient Temperature, T _A	LIMITS			UNITS
			CA741 CA747* CA748 CA1558*			
			Min.	Typ.	Max.	
Input Offset Voltage, V _{IO}	R _S = ≤ 10 kΩ	25 °C	—	1	5	mV
		-55 to +125 °C	—	1	6	
Input Offset Current, I _{IO}		25 °C	—	20	200	nA
		-55 °C	—	85	500	
		+125 °C	—	7	200	
Input Bias Current, I _{IB}		25 °C	—	80	500	nA
		-55 °C	—	300	1500	
		+125 °C	—	30	500	
Input Resistance, R _I			0.3	2	—	MΩ
Open-Loop Differential Voltage Gain, A _{OL}	R _L ≥ 2 kΩ V _O = ± 10 V	25 °C	50,000	200,000	—	
		-55 to +125 °C	25,000	—	—	
Common-Mode Input Voltage Range, V _{ICR}		-55 to +125 °C	±12	±13	—	V
Common-Mode Rejection Ratio , CMRR	R _S ≤ 10 kΩ	-55 to +125 °C	70	90	—	dB
Supply Voltage Rejection Ratio, PSRR	R _S ≤ 10 kΩ	-55 to +125 °C	—	30	150	μV/V
Output Voltage Swing, V _{Opp}	R _L ≥ 10 kΩ	-55 to +125 °C	±12	±14	—	V
	R _L ≥ 2 kΩ	-55 to +125 °C	±10	±13	—	
Supply Current, I [±]		25 °C	—	1.7	2.8	mA
		-55 °C	—	2	3.3	
		+125 °C	—	1.5	2.5	
Device Dissipation, P _D		25 °C	—	50	85	mW
		-55 °C	—	60	100	
		+125 °C	—	45	75	

* Values apply for each section of the dual amplifiers.

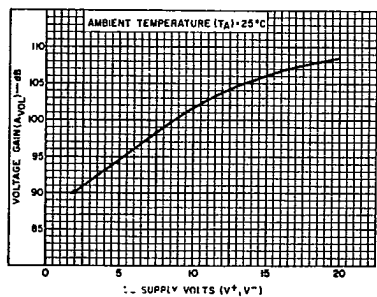


Fig.4—Open-loop voltage gain vs. supply voltage for all types except CA748 and CA748C.

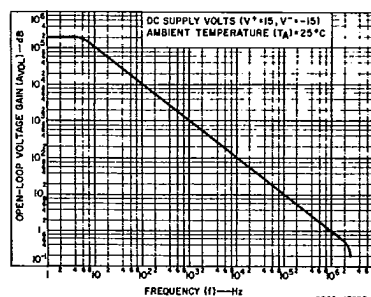


Fig.5—Open-loop voltage gain vs. frequency for all types except CA748 and CA748C.

CA741, CA747, CA748, CA1458, CA1558, LM741, LM748, LM1458, LM1558

T-79-05-20

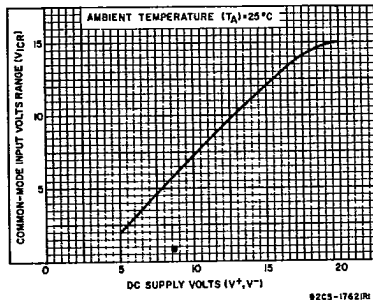


Fig. 6—Common-mode input voltage range vs. supply voltage for all types.

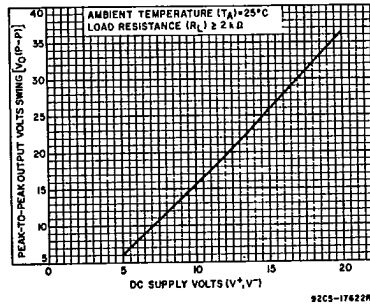


Fig. 7—Peak-to-peak output voltage vs. supply voltage for all types except CA748 and CA748C.

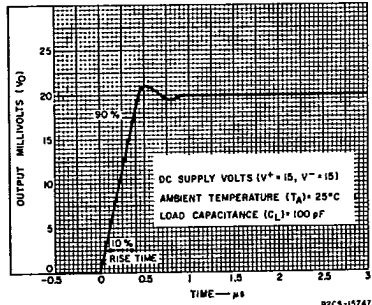


Fig. 8—Output voltage vs. transient response time for CA741C and CA741.




Fig. 9—Voltage offset null circuit for CA741C, CA741, CA747GE, and CA747E.




Fig. 10—Voltage-offset null circuit for CA748C and CA748.

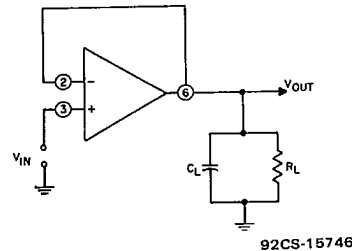


Fig. 11—Transient response test circuit for all types.

Operational Amplifiers


CA741, CA747, CA748, CA1458, CA1558,
LM741, LM748, LM1458, LM1558

1-79-05-20

CHIP PHOTOS


Dimensions and Pad Layouts

CA741CH

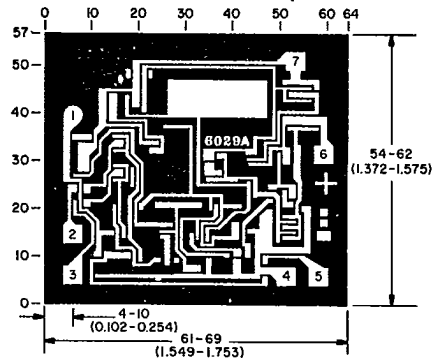


92CS-11259

CA747CH

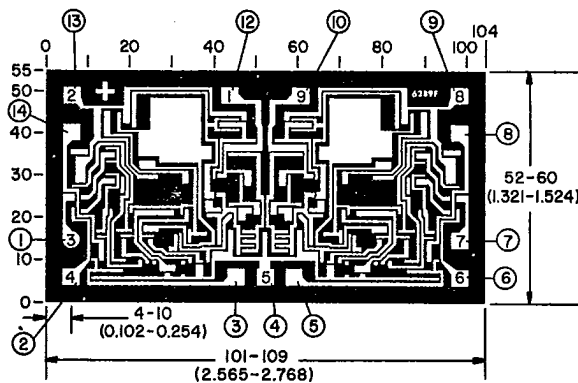


NOTE: NOS. IN PADS ARE FOR 10-LEAD TO-5
NOS. OUTSIDE OF CHIP ARE FOR 14-LEAD DIP

92CM-33260

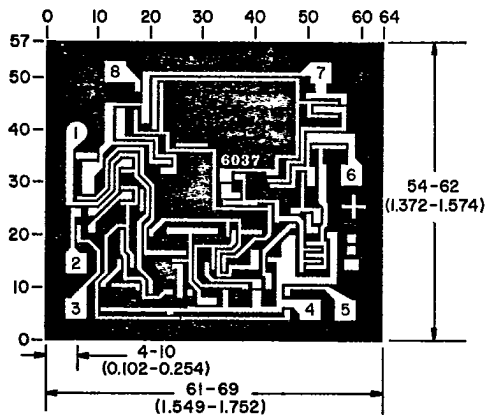

92CS-33261

CA748CH

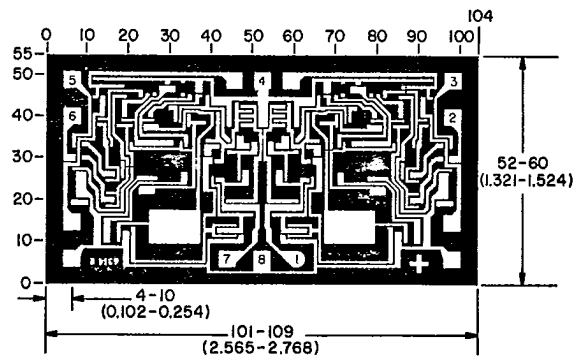

92CS-33263RI

CA1458H

Dimensions in parentheses are in millimeters and are
derived from the basic inch dimensions as indicated.
Grid graduations are in mils (10^{-3} inch).